

Company Profile

Product Range Index

Product Range

Section A

D/A Piston Seals

Section B

S/A Piston Seals

Section C

Rod Seals

Section D

Rod Wipers

Section E

Bearing rings

Section F

O-Rings & Backup Rings

Other Claron Group Products

Appendix 1

Guide To Seal Selection

Appendix 2

Materials Compatibility & Storage

Appendix 3

Seal Installation

Appendix 4

Tolerance Tables

Appendix 5

Terms & Conditions Of Sale

Health & Safety At Work Act

Elastomer Based Seals:- Claron Hydraulic Seals Ltd.

Station Road, Cradley Heath
West Midlands. B64 6PN UK

Tel. +44 (0) 121 559 9711
Fax. +44 (0) 121 559 1036

E-Mail: Sales@claron-seals.co.uk
Website: www.claron.co.uk

PTFE / Plastic Faced Seals:- Claron Hydraulic Services

Yalberton Industrial Estate, Paignton
Devon, TQ4 7QL UK

Tel. +44 (0) 1803 528852
Fax. +44 (0) 1803 525134

E-Mail: Services@claron.co.uk
Website: www.claron.co.uk

PTFE Stock Shapes:- Claron (Plastics) Ltd.

Yalberton Industrial Estate, Paignton
Devon, TQ4 7QL UK

Tel. +44 (0) 1803 528677
Fax. +44 (0) 1803 525134

E-Mail: Plastics@claron.co.uk
Website: www.claron.co.uk

www.claron.co.uk
for updated information

Introduction

The Claron Group of companies is one of the leading manufacturers of high quality hydraulic and pneumatic sealing products, marketing a range of seals under the "Polyseal" trade name. Based in the UK, it has expanded rapidly since its formation in 1973 and since 1985 has continued to develop modern manufacturing plants in both the West Midlands and South Devon.

A high level of expertise in the manufacture of rubber and plastics products enables the group to co-ordinate the design and manufacture of high quality seals using many specialist materials. Various combinations of rubber/fabric, polyurethane's, PTFE Compounds, TPE, POM, UHMWPE, VESPEL, PEEK and Phenolic along with other high performance materials enables the Group to offer an extremely comprehensive range of sealing products.

The extensive knowledge of modern materials necessary for the production of the "Polyseal" range of products and the further development of specialist processing methods also provide the facilities for other complementary ranges of products and customer related services. Claron is the UK's largest manufacturer of stock shapes based on PTFE compounds specifically developed for sealing systems. The quality of this range of products has gained the approval and widespread use of many diverse industries whether supplied as P.T.F.E. semi-finished products or machined components. The trend towards the supply of quality seal kits, packaged to meet the requirements of both production and aftermarket sales is also uniquely accommodated by the Group, being ideally suited to the many diverse methods of manufacture available.

Claron is not only a market leader but unique within the UK for the range of products manufactured. With the exception of rubber O-Ring production all the products shown in this catalogue are manufactured by Claron within the UK, utilising modern in-house plant and stringent quality procedures to ISO Standards.

The Group is uniquely equipped to meet the demands of today's sealing technology and a continuing policy of product development with a commitment to quality and excellence ensures that the Group will continue to be capable of meeting the future demands of the Hydraulics and Pneumatic industries with products at the forefront of technology.

The Claron Group operate a quality management system, accredited through the BSI, to the BS EN ISO 9001; 2000 standard.

Claron Group - Products













Hydraulic & Pneumatic Seals
Seal Kits
Precision Rubber Mouldings
PTFE Stock shapes
Bellows & Components
Plastics, Gaskets
Valve Seats















Product Range

| Type | Profile | Style | Description | Temp. | Pressure | Speed | Availability | | Page |
|--|---------|------------|--|------------|----------|-------|-------------------------------------|-------------------------------------|-------------|
| | | | | °C | Bar | M/Sec | Metric | Inch | |
| Maximum Non-Simultaneous Conditions | | | | | | | | | |
| Double Acting Piston Seals - Section A | | SPS | Double acting NBR piston seal for one piece pistons, incorporating Polyester anti-extrusion rings & POM bearing rings | -30 to 100 | 500 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A1 |
| | | SPS | Double acting NBR piston seal for one piece pistons, incorporating P.T.F.E. anti-extrusion rings & POM bearing rings. | -30 to 100 | 250 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A2 |
| | | DP | Double acting NBR piston seal with rubberised fabric reinforcement. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A3 |
| | | DPE | Double acting NBR piston seal with rubberised fabric reinforcement & clip on POM anti-extrusion rings. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A4 |
| | | DPW | Double acting NBR piston seal with rubberised fabric reinforcement & clip on POM anti-extrusion Bearing rings. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A5 |
| | | DPW.../L | Double acting NBR piston seal with rubberised fabric reinforcement & full width POM anti-extrusion Bearing rings. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A6 |
| | | JS/H | Double acting NBR piston seal with polyester anti-extrusion headers. | -30 to 100 | 600 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A7 |
| | | DPDS | Double acting NBR piston seal for one piece pistons, incorporating Hytel anti-extrusion rings & POM bearing rings. | -30 to 100 | 600 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A8 |
| | | SFD | Double acting NBR rubberised fabric piston seal incorporating POM anti-extrusion header. | -30 to 100 | 600 | 0.8 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A9 |
| | | PRF PFD | Double acting NBR rubberised fabric piston seal incorporating POM or NBR filler ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A10 Call |
| | | SPW | Double acting NBR energised Bronze filled PTFE piston seal for one piece pistons, incorporating MoS ₂ filled PA anti-extrusion rings. | -30 to 100 | 500 | 4.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A11 |
| | | CSPG | Double acting NBR energised | -40 to 120 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A12 |










Product Range

| Type | Profile | Style | Description | Temp. | Pressure | Speed | Availability | | Page |
|---|---|---|---|---|------------|-------|-------------------------------------|-------------------------------------|-------------------------------------|
| | | | | °C | Bar | M/Sec | Metric | Inch | |
| Double Acting Piston Seals - A |  | CS 8 | Glass filled PTFE piston seal for one piece pistons. Double acting NBR energised 98° Shore A Polyurethane piston seal for one piece pistons to ISO/European housing standards. | -30 to 100 | 450 | 1.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A13 |
| |  | CSPGI | Double acting NBR energised 98° Shore A Polyurethane piston seal for one piece pistons to Japanese housing standards | -30 to 100 | 450 | 1.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A14 |
| |  | CS 5 | Double acting NBR energised Bronze filled PTFE piston seal for one piece pistons. | -50 to 200 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A15 |
| |  | 841 | | -50 to 200 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A15 |
| |  | CS2 CS4 | Double acting NBR energised PTFE piston seal for one piece pistons. | -50 to 200 | 350 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A16 |
| |  | D-Ring | Double acting NBR energised Bronze filled PTFE piston seal for one piece pistons | -50 to 200 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A17 |
| |  | DSE | Double acting NBR energised PTFE piston seal for O-Ring housings to BS1806 & BS4518. | -50 to 200 | 350 | 5.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | A18 Call |
| | Single Acting Piston Seals - Section B |  | CP | Single acting NBR piston / rod seal with rubberised fabric reinforcement. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|  | | P | Single acting NBR piston / rod seal with rubberised fabric reinforcement. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B2 |
|  | | GP | Single acting U-Section NBR piston / rod seal with rubberised fabric reinforcement. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B3 |
|  | | PRU | Single acting U-Section NBR piston / rod seal . | -30 to 100 | 150 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B4 Call |
|  | | PFU | Single acting U-Section NBR rubberised fabric piston / rod seal. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B5 Call |













Product Range

| Type | Profile | Style | Description | Temp. | Pressure | Speed | Availability | | Page |
|--|---|----------|---|------------|----------|-------|-------------------------------------|-------------------------------------|-------------|
| | | | | °C | Bar | M/Sec | Metric | Inch | |
| Maximum Non-Simultaneous Conditions | | | | | | | | | |
| Single Acting Piston Seals - Section B |  | CPE | Single acting NBR piston seal with rubberised fabric reinforcement & clip on POM anti-extrusion ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B6 |
| |  | PEO | Single acting NBR piston seal with rubberised fabric reinforcement & clip on POM anti-extrusion ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B7 |
| |  | GPE | Single acting U-Section NBR piston seal with rubberised fabric reinforcement & clip on POM anti-extrusion ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B8 |
| |  | PW | Single acting NBR piston seal with rubberised fabric reinforcement & clip on POM bearing ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B9 |
| |  | GPW | Single acting U-Section NBR piston seal with rubberised fabric reinforcement & clip on POM Bearing ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B10 |
| |  | PW.../L | Single acting NBR piston seal with rubberised fabric reinforcement & full width POM bearing ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B11 |
| |  | CPU | Single acting U-Section AU piston / rod seal. | -40 to 110 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B12 |
| |  | CPU.../P | Single acting Asymmetric AU piston seal. | -40 to 110 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B13 |
| |  | FPC | Single acting NBR rubberised fabric piston seal. | -30 to 100 | 170 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B14 |
| |  | PRC | Single acting NBR piston seal. | -30 to 100 | 35 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B15 Call |
| |  | 851 | Single acting NBR energised Bronze filled PTFE piston seal for one piece pistons. | -50 to 200 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B16 |
| |  | PDE | Single acting NBR piston seal. | -30 to 100 | 100 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B17 Call |













Product Range

| Type | Profile | Style | Description | Temp. | Pressure | Speed | Availability | | Page |
|---|---|---------------------------------------|---|------------|----------|-------------------------------------|-------------------------------------|-------------------------------------|------|
| | | | | °C | Bar | M/Sec | Metric | Inch | |
| Maximum Non-Simultaneous Conditions | | | | | | | | | |
| Rod Seals - Section C |  | PSR | POM piston seal retaining ring. | -30 to 100 | | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | B18 |
| |  | CP | Single acting NBR rod / piston seal with rubberised fabric reinforcement. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C1 |
| |  | P | Single acting NBR rod / piston seal with rubberised fabric reinforcement. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C2 |
| |  | GP | Single acting U-Section NBR rod / piston seal with rubberised fabric reinforcement. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C3 |
| |  | CPI | Single acting NBR rod seal with rubberised fabric reinforcement & clip on POM anti-extrusion ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C4 |
| |  | PEI | Single acting NBR rod seal with rubberised fabric reinforcement & clip on POM anti-extrusion ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C5 |
| |  | PV | Single acting NBR rubberised fabric rod / piston seal. | -30 to 100 | 700 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C6 |
| |  | PVM | PVM include NBR V-Rings as standard | | | | | | |
| |  | PDS | Single acting NBR rod seal incorporating a Polyester anti-extrusion header & POM anti-extrusion rings. | -30 to 100 | 600 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C7 |
| |  | EGS | Single acting NBR rod seal incorporating rubberised fabric reinforcement and polyester anti extrusion header. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C8 |
| |  | CPU | Single acting U-Section AU rod / piston seal. | -40 to 110 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C9 |
| |  | CPU.../F | Single acting U-Section AU rod / piston seal. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C10 |
|  | CPU.../G | Single acting Asymmetric AU rod seal. | -40 to 110 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C11 | |












Product Range

| Type | Profile | Style | Description | Temp. | Pressure | Speed | Availability | | Page |
|---|---|--|--|------------|----------|-------------------------------------|-------------------------------------|-------------------------------------|------|
| | | | | °C | Bar | M/Sec | Metric | Inch | |
| Maximum Non-Simultaneous Conditions | | | | | | | | | |
| Rod Seals - Section C |  | CPG | Single acting Asymmetric AU rod seal with secondary sealing lip. | -40 to 110 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C12 |
| |  | CPS | Single acting solid section AU rod seal. | -40 to 110 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C13 |
| |  | CPU.../OR | Single acting U-Section AU rod seal with NBR energiser. | -40 to 110 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C14 |
| |  | CPUI.../OR | Single acting U-Section AU rod seal with NBR energiser & MoS ₂ filled PA anti-extrusion rings. | -40 to 110 | 500 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C15 |
| |  | CPGI.../OR | Single acting U-Section AU rod seal with NBR energiser, MoS ₂ filled PA anti-extrusion rings, & secondary sealing lip | -40 to 110 | 500 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C16 |
| |  | HBI | Single acting U-Section AU rod seal with POM anti-extrusion rings. | -40 to 110 | 500 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C17 |
| |  | CS6 | Double acting NBR energised Bronze filled PTFE rod seal. | -50 to 200 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C18 |
| |  | 741 | Double acting NBR energised Bronze filled PTFE rod seal. | -50 to 200 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C18 |
| |  | 751 | Double acting NBR energised Bronze filled PTFE rod seal. | -50 to 200 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C18 |
| |  | CS1 CS3 | Double acting NBR energised PTFE rod seal. | -50 to 200 | 350 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C19 |
| |  | HBT | Single acting NBR energised Bronze filled PTFE rod seal. | -50 to 200 | 800 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C20 |
|  | HBTY | Single acting NBR energised filled PTFE tandem seal. | -30 to 120 | 400 | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C21 | |











Product Range

| Type | Profile | Style | Description | Temp. | Pressure | Speed | Availability | | Page |
|-------------------------------------|---|--------------------|--|------------|----------|-------|-------------------------------------|-------------------------------------|-------------|
| | | | | °C | Bar | M/Sec | Metric | Inch | |
| Maximum Non-Simultaneous Conditions | | | | | | | | | |
| Rod Seals - Section C |  | DSI | Double acting NBR energised PTFE rod seal for O-Ring housings to BS1806 & BS4518. | -30 to 120 | 350 | 5.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C22 Call |
| |  | PFU | Single acting U-Section NBR rubberised fabric rod / piston seal. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C23 Call |
| |  | PRU | Single acting U-Section NBR rod / piston seal. | -30 to 100 | 150 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C24 Call |
| |  | PDI | Single acting U-Section NBR rod seal. | -30 to 100 | 100 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C25 Call |
| |  | PRF PFD | Single acting NBR rubberised fabric rod seal incorporating POM or NBR filler ring. | -30 to 100 | 400 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C26 Call |
| |  | PFI | Single acting NBR rubberised fabric rod seal. | -30 to 100 | 200 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C27 Call |
| |  | PFC | Single acting NBR rubberised fabric rod seal. | -30 to 100 | 200 | 0.5 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | C28 Call |
| Rod Wipers - Section D |  | PWB | Single acting NBR light duty rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D1 |
| |  | PWO | Single acting NBR medium to heavy duty rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D2 |
| |  | PWS | Single acting NBR medium to heavy duty rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D3 |
| |  | PWM | Single acting NBR medium to heavy duty rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D4 |
| |  | WM | Single acting NBR medium to heavy duty rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D5 |

Product Range

| Type | Profile | Style | Description | Temp. | Pressure | Speed | Availability | | Page |
|--------------|---|-------------|---|-------------------------------------|----------|-------|-------------------------------------|-------------------------------------|-------------|
| | | | | °C | Bar | M/Sec | Metric | Inch | |
| | | | | Maximum Non-Simultaneous Conditions | | | | | |
| Rod Wipers D |  | PWE | Twinlip NBR medium to heavy duty rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D6 |
| |  | CSWM CSW | Single lip MoS ₂ filled PA medium to heavy duty rod wiper. | -40 to 100 | | 5.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D7 |
| |  | PMW | Single lip metal cased AU medium to heavy duty Press fit rod wiper. | -40 to 110 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D8 |
| |  | PFB | Twinlip metal cased NBR medium to heavy duty Press fit rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D9 |
| |  | PFP | Twinlip metal cased AU medium to heavy duty Press fit rod wiper. | -40 to 110 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D10 |
| |  | UPWM | Single lip AU medium to heavy duty rod wiper. | -40 to 110 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D11 |
| |  | PWD | Twinlip AU medium to heavy duty rod wiper. | -40 to 110 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D12 |
| |  | EW | Single lip AU heavy duty rod wiper. | -40 to 110 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D13 |
| |  | 931 | Single lip NBR energised PTFE light to heavy duty rod wiper. | -50 to 200 | | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D14 |
| |  | 941 951 | Twinlip NBR energised PTFE light to heavy duty rod wiper. | -50 to 200 | | 15.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D14 |
| |  | PWH | Twinlip NBR light duty rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D15 Call |
| |  | PWN | Twinlip NBR medium to heavy duty rod wiper. | -30 to 100 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D16 Call |


Product Range



| Type | Profile | Style | Description | Temp. | Pressure | Speed | Availability | | Page |
|---|---|--------------------|--|-------------------------------------|-----------|-------|-------------------------------------|-------------------------------------|------------|
| | | | | °C | Bar | M/Sec | Metric | Inch | |
| | | | | Maximum Non-Simultaneous Conditions | | | | | |
| Bearing Rings - Section E |  | PWC | Single lip AU medium to heavy duty rod wiper. | -40 to 110 | | 3.0 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | D17 |
| |  | EBR IBR | POM rod/piston bearing rings. | -40 to 110 | See Table | 1 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | E1 |
| |  | BT CT | Bronze or Carbon filled PTFE rod/piston bearing rings. | -60 to 200 | See Table | 15 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | E2 |
| |  | BGF | Glass filled PA rod/piston bearing rings. | 110 | See Table | 115 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | E3 |
| |  | PBR | Reinforced Phenolic resin rod / piston bearing rings. | 150 | See Table | 3 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | E4 |
| O-Rings, Backup Rings & Flange Seals - Section F |  | BS.../OR70 | NBR O-Rings 75° IRHD. | -40 to 130 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | F1 |
| | | BS.../OR90 | NBR O-Rings 90° IRHD. | -30 to 100 | | 100 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Call |
| |  | BS.../ORP | Polyurethane O-Rings. | -40 to 110 | | 350 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | F2 Call |
| |  | BS.../ORV | P.T.F.E. O-Rings. | -200 to +260 | | 400 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | F3 Call |
| |  | BS... | | | | | | | |
| | | BS.../E | P.T.F.E. Anti-extrusion rings to suit O-Rings in Spiral, Endless, or Endless Split styles. | -200 to +200 | | 400 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | F4 |
| | BS.../ES | | | | | | | | |
| |  | CFS | Polyurethane Static Flange Seal to suit SAE J518 Flanges | -40 to 110 | | 400 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | F5 |

ALL PRODUCTS ARE PRODUCED IN HOUSE IN THE U.K.
EXCEPT FOR BULK RUBBER O-RING PRODUCTION.

SECTION A

DOUBLE ACTING PISTON SEALS

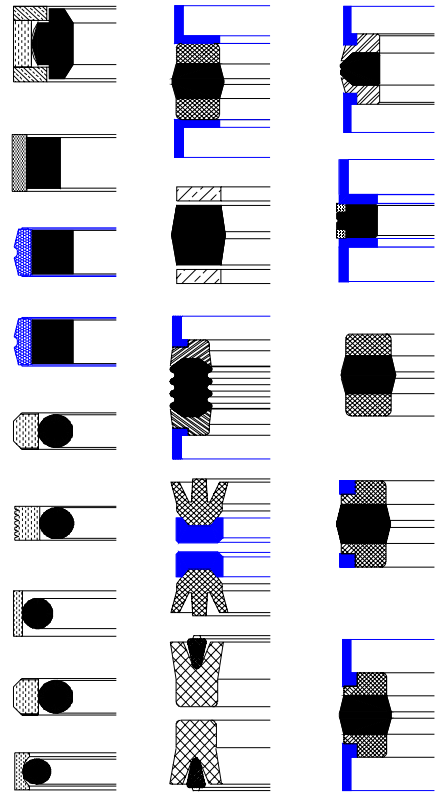



Design

Designed for use on one piece pistons, the five part assembly consists of an endless precision rubber moulded sealing element supported at each end with angle split support rings. The support rings are designed to accommodate split Polyacetal anti-extrusion bearing rings.

The design allows the anti extrusion bearing rings to react positively to increasing pressures. The final assembly provides a robust sealing unit designed to operate at higher pressures.

The seal is also suitable for existing two piece pistons of the same housing dimensions.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -30°C to 80°C | -30°C to 100°C |
| 0.50 | 400 Bar | 300 Bar |
| 0.15 | 500 Bar | 400 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting


Fit seal onto the piston in the following sequence.

- 1- Rubber Sealing Element
- 2- Support Rings
- 3- Polyacetal bearing rings.


It is important that care be taken in fitting the seal within its housing.

Refer to Appendix 3 for check list.

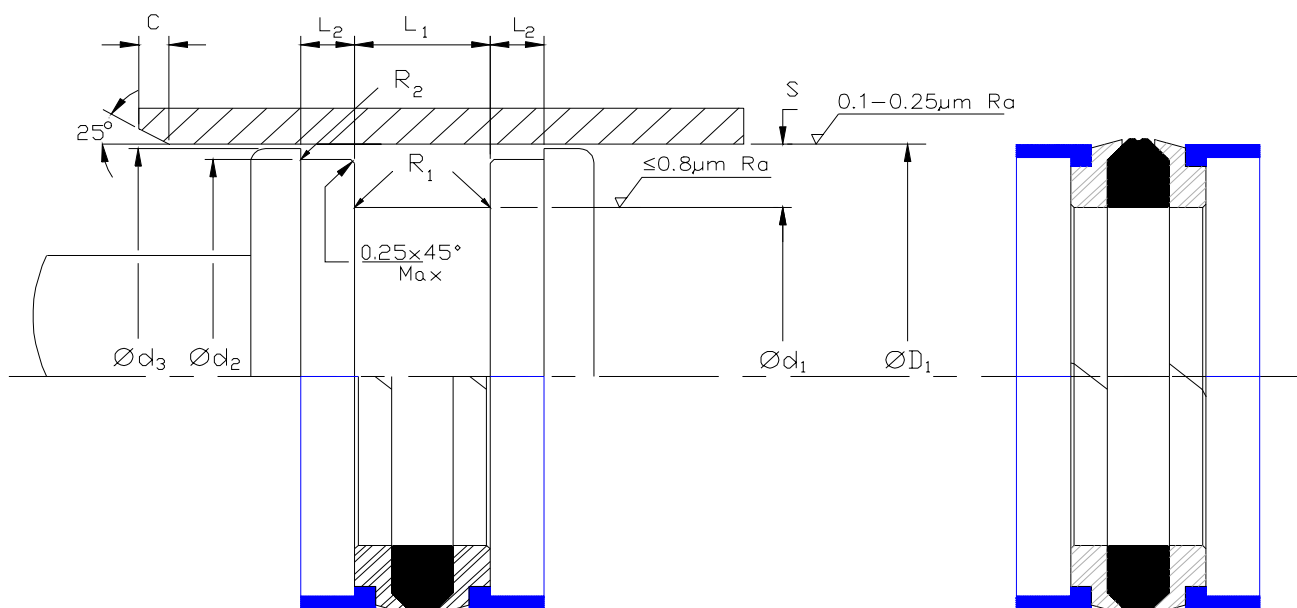



SPS





Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 ØD ₁ | h9 Ød ₁ | h9 Ød ₂ | h11 Ød ₃ | +0.63 +0.38 L ₁ | +0.1 -0.0 L ₂ | Nominal S | Minimum C | Maximum R ₁ | Maximum R ₂ |
|---------------------|------------------------|-----------------------|-----------------------|------------------------|----------------------------------|--------------------------------|--------------|--------------|---------------------------|---------------------------|
| * SPS 125094/2 | 32 | 24 | 28.00 | 31.40 | 15.12 | 3.20 | 4.0 | 2.5 | 0.4 | 0.2 |
| * SPS 157125/1 | 40 | 32 | 36.00 | 39.40 | 15.12 | 3.20 | 4.0 | 2.5 | 0.4 | 0.2 |
| SPS 157094 | 40 | 24 | 35.40 | 38.65 | 18.00 | 6.35 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 196133 | 50 | 34 | 45.40 | 48.65 | 18.00 | 6.35 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 196133/4 | 50 | 34 | 46.00 | 49.40 | 20.12 | 3.10 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 196149 | 50 | 38 | 46.00 | 49.40 | 20.12 | 4.20 | 6.0 | 5.0 | 0.4 | 0.2 |
| SPS 196157/1 | 50 | 40 | 47.00 | 49.00 | 12.50 | 4.00 | 5.0 | 2.5 | 0.4 | 0.4 |
| SPS 216153 | 55 | 39 | 51.00 | 54.40 | 20.12 | 3.10 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 236173 | 60 | 44 | 55.40 | 58.65 | 18.00 | 6.35 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 236173/4 | 60 | 44 | 56.00 | 59.40 | 20.12 | 3.10 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 236177 | 60 | 45 | 55.40 | 58.65 | 22.12 | 6.35 | 7.5 | 5.0 | 0.4 | 0.2 |
| SPS 236188 | 60 | 48 | 56.00 | 59.40 | 20.12 | 4.20 | 6.0 | 5.0 | 0.4 | 0.2 |
| SPS 248185 | 63 | 47 | 58.40 | 61.65 | 19.00 | 6.35 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 248185/4 | 63 | 47 | 59.00 | 61.50 | 20.12 | 3.10 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 248200 | 63 | 51 | 59.00 | 62.40 | 20.12 | 4.20 | 6.0 | 5.0 | 0.4 | 0.2 |
| SPS 248208/1 | 63 | 53 | 60.00 | 62.00 | 12.50 | 4.00 | 5.0 | 2.5 | 0.4 | 0.4 |
| SPS 255196 | 65 | 50 | 60.40 | 63.65 | 18.00 | 6.35 | 7.5 | 5.0 | 0.4 | 0.2 |
| SPS 275196 | 70 | 50 | 64.15 | 68.35 | 22.00 | 6.35 | 10.0 | 5.0 | 0.4 | 0.2 |
| SPS 275216 | 70 | 55 | 64.15 | 68.35 | 22.12 | 6.35 | 7.5 | 5.0 | 0.4 | 0.2 |
| SPS 275212/4 | 70 | 54 | 66.00 | 68.50 | 20.12 | 3.10 | 8.0 | 5.0 | 0.4 | 0.2 |
| SPS 275228 | 70 | 58 | 66.00 | 69.40 | 20.12 | 4.20 | 6.0 | 5.0 | 0.4 | 0.2 |
| SPS 295248 | 75 | 63 | 71.00 | 74.40 | 20.12 | 4.20 | 6.0 | 5.0 | 0.4 | 0.2 |
| SPS 314236 | 80 | 60 | 74.15 | 78.35 | 22.00 | 6.35 | 10.0 | 5.0 | 0.4 | 0.2 |
| SPS 314244/4 | 80 | 62 | 76.00 | 78.50 | 22.12 | 3.60 | 9.0 | 5.0 | 0.4 | 0.2 |
| SPS 314255 | 80 | 65 | 74.15 | 78.35 | 22.12 | 6.35 | 7.5 | 5.0 | 0.4 | 0.2 |
| SPS 314255/1 | 80 | 65 | 76.00 | 78.50 | 20.00 | 5.00 | 7.5 | 4.0 | 0.4 | 0.4 |
| SPS 314259 | 80 | 66 | 76.00 | 79.40 | 22.12 | 5.20 | 7.0 | 5.0 | 0.4 | 0.2 |
| SPS 354275 | 90 | 70 | 84.15 | 88.35 | 22.00 | 6.35 | 10.0 | 5.0 | 0.4 | 0.2 |
| SPS 354275/1 | 90 | 70 | 84.15 | 88.35 | 29.62 | 6.35 | 10.0 | 5.0 | 0.4 | 0.2 |
| SPS 354299 | 90 | 76 | 86.00 | 89.40 | 22.12 | 5.20 | 7.0 | 5.0 | 0.4 | 0.2 |
| SPS 393295 | 100 | 75 | 93.15 | 98.00 | 22.00 | 6.35 | 12.5 | 6.5 | 0.4 | 0.2 |
| SPS 393314 | 100 | 80 | 94.15 | 98.35 | 29.62 | 6.35 | 10.0 | 5.0 | 0.4 | 0.2 |
| SPS 393334 | 100 | 85 | 96.00 | 98.50 | 20.00 | 5.00 | 7.5 | 4.0 | 0.4 | 0.4 |
| SPS 393338 | 100 | 86 | 96.00 | 99.40 | 22.12 | 5.20 | 7.0 | 5.0 | 0.4 | 0.2 |
| SPS 433334 | 110 | 85 | 103.10 | 108.00 | 22.00 | 6.35 | 12.5 | 6.5 | 0.4 | 0.2 |
| SPS 433354 | 110 | 90 | 103.10 | 108.00 | 29.62 | 6.35 | 10.0 | 5.0 | 0.4 | 0.2 |
| SPS 472393 | 120 | 100 | 113.10 | 118.00 | 29.62 | 6.35 | 10.0 | 5.0 | 0.4 | 0.2 |
| SPS 492393 | 125 | 100 | 118.00 | 123.00 | 25.00 | 12.70 | 12.5 | 6.5 | 0.4 | 0.2 |
| SPS 492393/1 | 125 | 100 | 118.00 | 123.00 | 25.00 | 6.35 | 12.5 | 6.5 | 0.4 | 0.2 |
| SPS 492425 | 125 | 108 | 121.00 | 124.00 | 26.12 | 5.70 | 8.5 | 5.0 | 0.4 | 0.2 |
| SPS 511433 | 130 | 110 | 123.08 | 128.00 | 29.62 | 6.35 | 10.0 | 5.0 | 0.4 | 0.2 |
| SPS 629531 | 160 | 135 | 152.60 | 157.00 | 25.00 | 9.52 | 12.5 | 6.5 | 0.4 | 0.2 |
| SPS 629551 | 160 | 140 | 151.40 | 158.50 | 24.62 | 12.50 | 10.0 | 5.0 | 0.4 | 0.2 |



Items in **BOLD** are to suit ISO 6547 Housings

Items marked * comprise of sealing element and two split bearing rings only



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | h9 | h9 | h11 | +0.025" +0.015" | +0.004 -0.000 | Nominal S | Minimum C | Maximum | |
|--------------------|-----------------|-----------------|-----------------|-----------------|--------------------|------------------|-----------|-----------|----------------|----------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | L ₁ | L ₂ | | | R ₁ | R ₂ |
| SPS 175112 | 1.750 | 1.125 | 1.570 | 1.698 | 0.750 | 0.250 | 0.312 | 0.156 | 0.008 | |
| SPS 200137 | 2.000 | 1.375 | 1.820 | 1.948 | 0.750 | 0.250 | 0.312 | 0.156 | 0.008 | |
| SPS 225162 | 2.250 | 1.625 | 2.069 | 2.197 | 0.750 | 0.250 | 0.312 | 0.156 | 0.008 | |
| SPS 237175 | 2.375 | 1.750 | 2.194 | 2.322 | 0.750 | 0.250 | 0.312 | 0.156 | 0.008 | |
| SPS 250187 | 2.500 | 1.875 | 2.319 | 2.446 | 0.750 | 0.250 | 0.312 | 0.156 | 0.008 | |
| SPS 262200 | 2.625 | 2.000 | 2.443 | 2.571 | 0.750 | 0.250 | 0.312 | 0.156 | 0.008 | |
| SPS 275200 | 2.750 | 2.000 | 2.522 | 2.685 | 0.937 | 0.250 | 0.375 | 0.187 | 0.008 | |
| SPS 300225 | 3.000 | 2.250 | 2.772 | 2.935 | 0.937 | 0.250 | 0.375 | 0.187 | 0.008 | |
| SPS 325250 | 3.250 | 2.500 | 3.021 | 3.184 | 0.937 | 0.250 | 0.375 | 0.187 | 0.008 | |
| SPS 325262 | 3.250 | 2.625 | 3.021 | 3.184 | 0.775 | 0.245 | 0.312 | 0.156 | 0.008 | |
| SPS 350275 | 3.500 | 2.750 | 3.271 | 3.434 | 0.937 | 0.250 | 0.375 | 0.187 | 0.008 | |
| SPS 350285 | 3.500 | 2.850 | 3.272 | 3.460 | 0.775 | 0.295 | 0.325 | 0.156 | 0.008 | |
| SPS 375300 | 3.750 | 3.000 | 3.520 | 3.683 | 0.937 | 0.250 | 0.375 | 0.187 | 0.008 | |
| SPS 400325 | 4.000 | 3.250 | 3.770 | 3.933 | 0.937 | 0.250 | 0.375 | 0.187 | 0.008 | |
| SPS 400337 | 4.000 | 3.375 | 3.772 | 3.960 | 0.775 | 0.245 | 0.312 | 0.156 | 0.008 | |
| SPS 450350 | 4.500 | 3.500 | 4.229 | 4.422 | 1.250 | 0.250 | 0.500 | 0.218 | 0.015 | |
| SPS 500400 | 5.000 | 4.000 | 4.709 | 4.902 | 1.250 | 0.375 | 0.500 | 0.218 | 0.015 | |
| SPS 500425 | 5.000 | 4.250 | 4.772 | 4.960 | 0.963 | 0.245 | 0.375 | 0.187 | 0.008 | |
| SPS 600500 | 6.000 | 5.000 | 5.709 | 5.902 | 1.250 | 0.375 | 0.500 | 0.218 | 0.015 | |



Design

Designed for use on one piece pistons, the five part assembly comprises of a precision moulded rubber sealing element to which are fitted endless P.T.F.E. anti-extrusion ring on the O.D. The anti extrusion rings are designed to be pre loaded on assembly thus effecting a more positive sealing arrangement. Split Polyacetal anti-extrusion bearing rings are added either side to provide support for the piston head.

This compact one piece piston seal has proven to be popular and effective over a wide range of applications.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -30°C to 80°C | -30°C to 100°C |
| 0.50 | 175 Bar | 110 Bar |
| 0.15 | 250 Bar | 160 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

Fit seal onto the piston in the following sequence.

- 1- Solid Anti Extrusion Ring.
- 2- Rubber Sealing Element
- 3- Solid Anti Extrusion Ring.
- 4- Polyacetal bearing rings.


It is important that care be taken in fitting the seal within its housing. Refer to appendix 3 for check list.

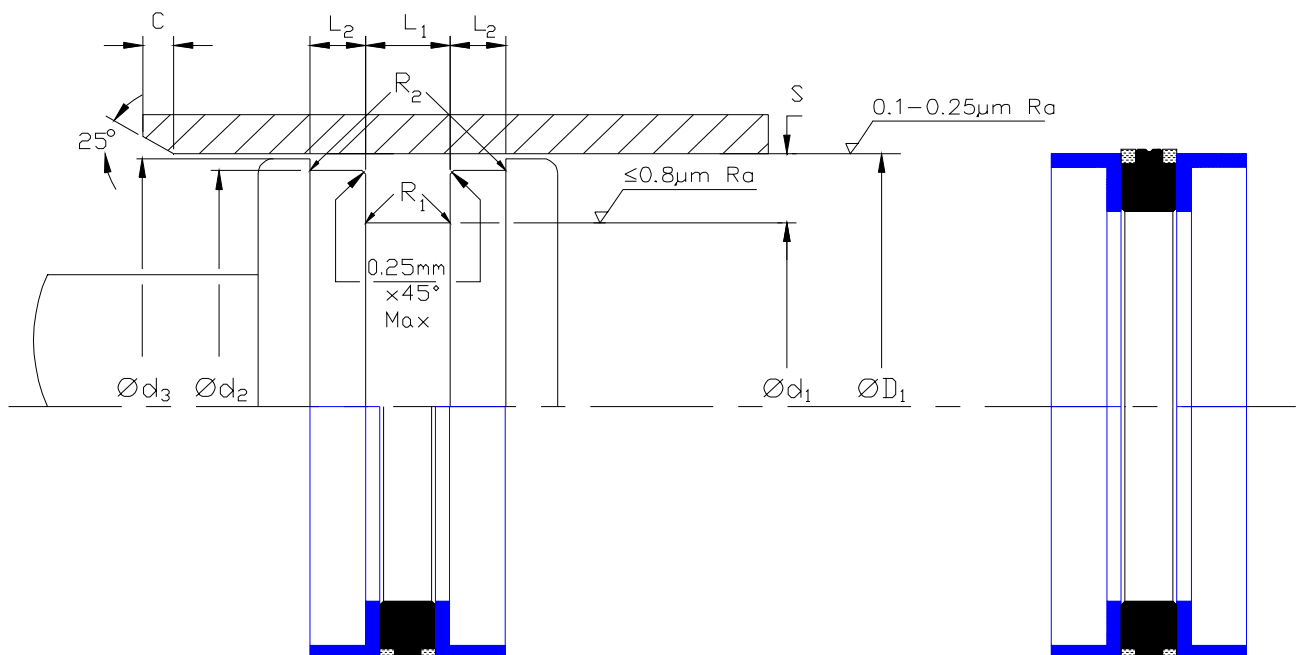



Claron Polyseal®
Double Acting Piston Seal

Metric




SPS

Nominal Dimensions & Machining Tolerances


| Claron Part Number | H10 | h9 | h9 | h9 | +0.40 +0.13 L ₁ | +0.0 -0.13 L ₂ | Nominal | Minimum | Maximum |
|-----------------------|-----------------|-----------------|-----------------|-----------------|----------------------------------|---------------------------------|---------|---------|-------------------------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | | | S | C | R ₁ R ₂ |
| * SPS 098068 | 25 | 17.5 | 21.3 | 24.0 | 8.5 | 3.25 | 3.75 | 2.0 | 0.2 |
| SPS 118082/4 | 30 | 21.0 | 27.0 | 29.0 | 13.5 | 2.0 | 4.5 | 2.5 | 0.2 |
| SPS 125086 | 32 | 22.0 | 27.5 | 31.0 | 11.0 | 4.0 | 5.0 | 2.5 | 0.2 |
| SPS 157118 | 40 | 30.0 | 35.5 | 39.0 | 11.0 | 4.0 | 5.0 | 2.5 | 0.2 |
| SPS 196157 | 50 | 40.0 | 45.5 | 49.0 | 11.0 | 4.0 | 5.0 | 2.5 | 0.2 |
| SPS 216177 | 55 | 45.0 | 50.5 | 54.0 | 11.0 | 4.0 | 5.0 | 2.5 | 0.2 |
| SPS 248208 | 63 | 53.0 | 58.5 | 61.5 | 11.0 | 4.0 | 5.0 | 2.5 | 0.2 |
| SPS 314275 | 80 | 70.0 | 75.5 | 78.5 | 11.0 | 4.0 | 5.0 | 2.5 | 0.2 |
| SPS 393342 | 100 | 87.0 | 93.8 | 98.5 | 14.0 | 6.0 | 6.5 | 4.0 | 0.4 |
| SPS 492440 | 125 | 112.0 | 118.8 | 123.5 | 14.0 | 6.0 | 6.5 | 4.0 | 0.4 |

* This size comprises Rubber Sealing Element and two Split Bearing Rings only.



ClaronPolyseal®
Double Acting Piston Seal
SPS



Imperial



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | h9 | h9 | h9 | +0.015" +0.005" | -0.005 +0.000 | Nominal S | Minimum C | Maximum | |
|-----------------------|-----------------|-----------------|-----------------|-----------------|--------------------|------------------|--------------|--------------|----------------|----------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | L ₁ | L ₂ | | | R ₁ | R ₂ |
| * SPS 100068 | 1.000 | 0.687 | 0.829 | 0.937 | 0.343 | 0.125 | 0.156 | 0.078 | 0.008 | |
| * SPS 106075 | 1.062 | 0.750 | 0.900 | 1.000 | 0.312 | 0.062 | 0.156 | 0.093 | 0.008 | |
| * SPS 125094 | 1.250 | 0.937 | 1.079 | 1.187 | 0.343 | 0.125 | 0.156 | 0.078 | 0.008 | |
| SPS 150112 | 1.500 | 1.125 | 1.324 | 1.437 | 0.437 | 0.150 | 0.187 | 0.093 | 0.008 | |
| SPS 175137 | 1.750 | 1.375 | 1.574 | 1.687 | 0.437 | 0.150 | 0.187 | 0.093 | 0.008 | |
| SPS 175137/1 | 1.750 | 1.375 | 1.638 | 1.710 | 0.490 | 0.245 | 0.187 | 0.093 | 0.008 | |
| SPS 200162 | 2.000 | 1.625 | 1.824 | 1.937 | 0.437 | 0.150 | 0.187 | 0.093 | 0.008 | |
| SPS 200162/1 | 2.000 | 1.625 | 1.888 | 1.960 | 0.490 | 0.245 | 0.187 | 0.093 | 0.008 | |
| SPS 237200 | 2.375 | 2.000 | 2.195 | 2.312 | 0.437 | 0.150 | 0.187 | 0.093 | 0.008 | |
| SPS 250200 | 2.500 | 2.000 | 2.320 | 2.460 | 0.650 | 0.245 | 0.250 | 0.125 | 0.008 | |
| SPS 250212 | 2.500 | 2.125 | 2.325 | 2.437 | 0.437 | 0.150 | 0.187 | 0.093 | 0.008 | |
| SPS 275225 | 2.750 | 2.250 | 2.570 | 2.710 | 0.650 | 0.250 | 0.250 | 0.125 | 0.008 | |
| SPS 275237 | 2.750 | 2.375 | 2.575 | 2.687 | 0.437 | 0.150 | 0.187 | 0.093 | 0.008 | |
| SPS 300237 | 3.000 | 2.375 | 2.772 | 2.960 | 0.775 | 0.245 | 0.312 | 0.156 | 0.016 | |
| SPS 300262 | 3.000 | 2.625 | 2.825 | 2.937 | 0.437 | 0.150 | 0.187 | 0.093 | 0.008 | |
| SPS 325287 | 3.250 | 2.875 | 3.075 | 3.187 | 0.437 | 0.150 | 0.187 | 0.093 | 0.008 | |
| SPS 350300 | 3.500 | 3.000 | 3.270 | 3.437 | 0.562 | 0.210 | 0.250 | 0.125 | 0.008 | |
| SPS 375325 | 3.750 | 3.250 | 3.520 | 3.687 | 0.562 | 0.210 | 0.250 | 0.125 | 0.008 | |
| SPS 400350 | 4.000 | 3.500 | 3.770 | 3.937 | 0.562 | 0.210 | 0.250 | 0.125 | 0.008 | |

Items marked * comprise of Sealing Element and two Split Bearing Rings only.



Design

Designed for use on split pistons, the seal is a precision moulded Nitrile rubber element with bonded rubberised fabric reinforcements. The seal is designed with initial radial interference such that when fitted low pressure sealing is effected. Rubberised fabric has the advantage of retaining the sealing media within its surface, thus reducing friction and wear. Style DP has proven to be effective over a wide range of applications.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |


These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

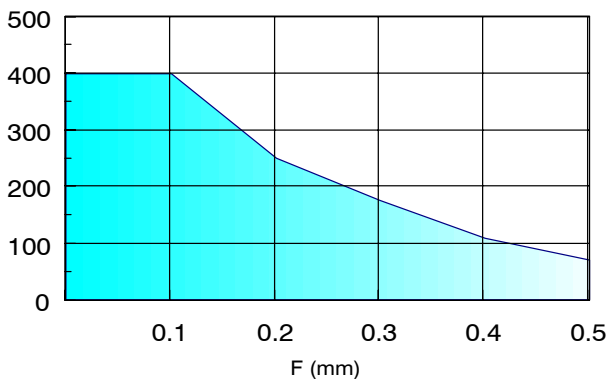

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.



Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting


For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

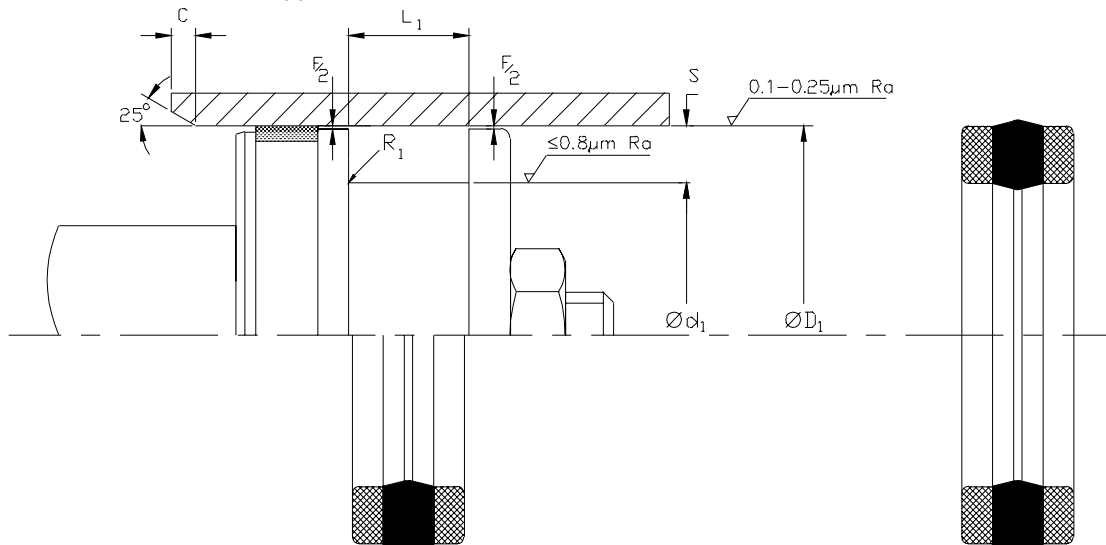




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H11 ØD ₁ | js11 Ød ₁ | +0.25 -0.00 L ₁ | Nominal S | Minimum C | Maximum R ₁ |
|--------------------|------------------------|-------------------------|----------------------------------|--------------|--------------|---------------------------|
| DP 098059 | 25 | 15 | 12.5 | 5.0 | 2.5 | 0.4 |
| DP 125086 | 32 | 22 | 12.5 | 5.0 | 2.5 | 0.4 |
| DP 157098/1 | 40 | 25 | 19.0 | 7.5 | 4.0 | 0.6 |
| DP 177102 | 45 | 26 | 25.0 | 9.5 | 5.0 | 0.8 |
| DP 196137/1 | 50 | 35 | 19.0 | 7.5 | 4.0 | 0.6 |
| DP 216157 | 55 | 40 | 19.0 | 7.5 | 4.0 | 0.6 |
| DP 236157/1 | 60 | 40 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 236177/1 | 60 | 45 | 19.0 | 7.5 | 4.0 | 0.6 |
| DP 248169 | 63 | 43 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 248188 | 63 | 48 | 19.0 | 7.5 | 4.0 | 0.6 |
| DP 275196/2 | 70 | 50 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 314236/2 | 80 | 60 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 354275/1 | 90 | 70 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 393314 | 100 | 80 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 433354 | 110 | 90 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 472393 | 120 | 100 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 492393/2 | 125 | 100 | 32.0 | 12.5 | 6.5 | 1.2 |
| DP 551472 | 140 | 120 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 570492 | 145 | 125 | 25.0 | 10.0 | 5.0 | 0.8 |
| DP 590492/1 | 150 | 125 | 32.0 | 12.5 | 6.5 | 1.2 |
| DP 629531 | 160 | 135 | 32.0 | 12.5 | 6.5 | 1.2 |
| DP 629551 | 160 | 140 | 25.0 | 10.0 | 5.0 | 0.8 |



DP





Nominal Dimensions & Machining Tolerances

| Claron Part Number | H11 ØD_1 | js11 Ød_1 | +0.025" +0.015" L_1 | Nominal S | Minimum C | Maximum R_1 |
|-----------------------|----------------------|-----------------------|-----------------------------|--------------|--------------|------------------|
| DP 075037/1 | 0.750 | 0.375 | 0.468 | 0.187 | 0.093 | 0.008 |
| DP 087050 | 0.875 | 0.500 | 0.312 | 0.187 | 0.093 | 0.008 |
| DP 100062 | 1.000 | 0.625 | 0.468 | 0.187 | 0.093 | 0.008 |
| DP 112062 | 1.125 | 0.625 | 0.500 | 0.250 | 0.125 | 0.015 |
| DP 112062/1 | 1.125 | 0.625 | 0.625 | 0.250 | 0.125 | 0.015 |
| DP 125075 | 1.250 | 0.750 | 0.625 | 0.250 | 0.125 | 0.015 |
| DP 137087 | 1.375 | 0.875 | 0.625 | 0.250 | 0.125 | 0.015 |
| DP 150100 | 1.500 | 1.000 | 0.625 | 0.250 | 0.125 | 0.015 |
| DP 162100 | 1.625 | 1.000 | 0.750 | 0.312 | 0.156 | 0.025 |
| DP 175112 | 1.750 | 1.125 | 0.750 | 0.312 | 0.156 | 0.025 |
| DP 200137 | 2.000 | 1.375 | 0.750 | 0.312 | 0.156 | 0.025 |
| DP 212150 | 2.125 | 1.500 | 0.750 | 0.312 | 0.156 | 0.025 |
| DP 225162 | 2.250 | 1.625 | 0.750 | 0.312 | 0.156 | 0.025 |
| DP 237175 | 2.375 | 1.750 | 0.750 | 0.312 | 0.156 | 0.025 |
| DP 250187 | 2.500 | 1.875 | 0.750 | 0.312 | 0.156 | 0.025 |
| DP 262200 | 2.625 | 2.000 | 0.750 | 0.312 | 0.156 | 0.025 |
| DP 275200 | 2.750 | 2.000 | 0.937 | 0.375 | 0.187 | 0.031 |
| DP 300225 | 3.000 | 2.250 | 0.937 | 0.375 | 0.187 | 0.031 |
| DP 300225/4 | 3.000 | 2.250 | 0.593 | 0.375 | 0.187 | 0.031 |
| DP 325250 | 3.250 | 2.500 | 0.937 | 0.375 | 0.187 | 0.031 |
| DP 325250/3 | 3.250 | 2.500 | 0.562 | 0.375 | 0.187 | 0.031 |
| DP 350275 | 3.500 | 2.750 | 0.937 | 0.375 | 0.187 | 0.031 |
| DP 375300 | 3.750 | 3.000 | 0.937 | 0.375 | 0.187 | 0.031 |
| DP 400325 | 4.000 | 3.250 | 0.937 | 0.375 | 0.187 | 0.031 |
| DP 402324/1 | 4.024 | 3.245 | 0.875 | 0.389 | 0.187 | 0.031 |
| DP 425350 | 4.250 | 3.500 | 0.937 | 0.375 | 0.187 | 0.031 |
| DP 450350 | 4.500 | 3.500 | 1.250 | 0.500 | 0.218 | 0.046 |
| DP475375 | 4.750 | 3.750 | 1.250 | 0.500 | 0.218 | 0.046 |
| DP 500400 | 5.000 | 4.000 | 1.250 | 0.500 | 0.218 | 0.046 |
| DP 525425 | 5.250 | 4.250 | 1.250 | 0.500 | 0.218 | 0.046 |
| DP 550450 | 5.500 | 4.500 | 1.250 | 0.500 | 0.218 | 0.046 |
| DP 600500 | 6.000 | 5.000 | 1.250 | 0.500 | 0.218 | 0.046 |
| DP 700600 | 7.000 | 6.000 | 1.250 | 0.500 | 0.218 | 0.046 |
| DP 800700 | 8.000 | 7.000 | 1.250 | 0.500 | 0.218 | 0.046 |

Double Acting Piston Seal Metric Imperial

DPE



Design

Designed for use on split pistons, the seal is a precision moulded rubber element with rubberised fabric reinforcements. Style DPE is fitted with Polyacetal anti-extrusion rings on the O.D. to allow larger machining clearances between the piston head and cylinder bore, and to permit higher working pressures. The seal is designed with sufficient radial sectional interference that on complete assembly low pressure sealing is effected. The supporting rubberised fabric has the capability of retaining the sealing media thus assisting in reducing friction and wear. Style DPE has proven to be effective over a wide range of applications.


Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.
Maximum Diametral Clearance F

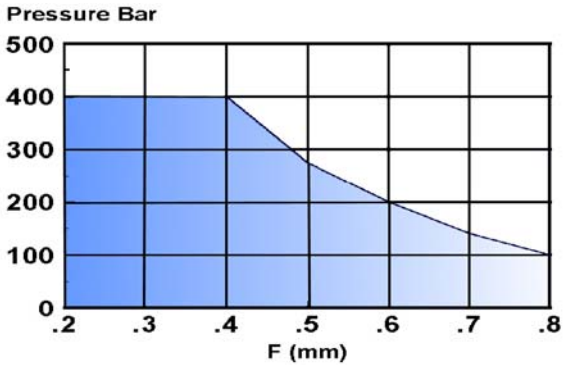

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C
 The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting



For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.
 For a detailed checklist, refer to Appendix 3.

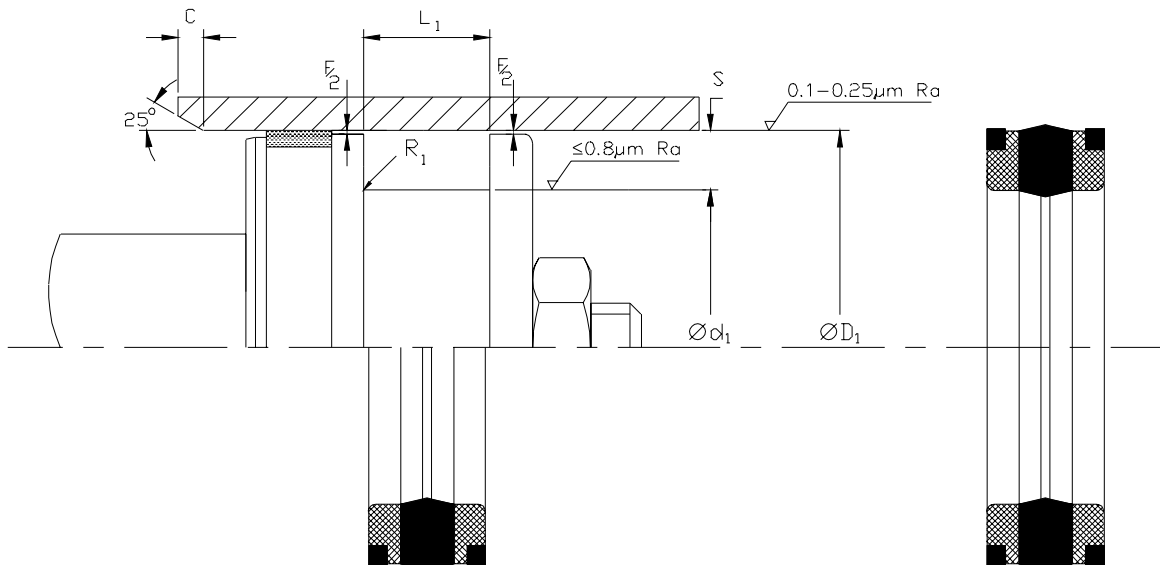

ClaronPolyseal®
Double Acting Piston Seal


Metric

DPE




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H11 | js11 | +0.63 +0.38 | Nominal | Minimum | Maximum |
|-----------------------|-----------------|-----------------|----------------|---------|---------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | S | C | R ₁ |
| DPE 098047 | 25 | 12 | 12 | 6.5 | 2.5 | 0.4 |
| DPE 118066 | 30 | 17 | 15 | 6.5 | 2.5 | 0.4 |
| DPE 157094 | 40 | 24 | 18 | 8.0 | 4.0 | 0.4 |
| DPE 177114 | 45 | 29 | 18 | 8.0 | 4.0 | 0.4 |
| DPE 188125 | 48 | 32 | 18 | 8.0 | 4.0 | 0.4 |
| DPE 196133 | 50 | 34 | 18 | 8.0 | 4.0 | 0.4 |
| DPE 216153/1 | 55 | 39 | 18 | 8.0 | 4.0 | 0.4 |
| DPE 236173/1 | 60 | 44 | 18 | 8.0 | 4.0 | 0.4 |
| DPE 248185 | 63 | 47 | 19 | 8.0 | 4.0 | 0.4 |
| DPE 255196 | 65 | 50 | 18 | 7.5 | 4.0 | 0.6 |
| DPE 275196 | 70 | 50 | 22 | 10.0 | 5.0 | 0.8 |
| DPE 295216 | 75 | 55 | 22 | 10.0 | 5.0 | 0.8 |
| DPE 314236 | 80 | 60 | 22 | 10.0 | 5.0 | 0.8 |
| DPE 334255 | 85 | 65 | 22 | 10.0 | 5.0 | 0.8 |
| DPE 354275 | 90 | 70 | 22 | 10.0 | 5.0 | 0.8 |
| DPE 393295 | 100 | 75 | 22 | 12.5 | 6.5 | 1.2 |
| DPE 393314 | 100 | 80 | 25 | 10.0 | 5.0 | 0.8 |
| DPE 413314 | 105 | 80 | 22 | 12.5 | 6.5 | 1.2 |
| DPE 433334/1 | 110 | 85 | 22 | 12.5 | 6.5 | 1.2 |
| DPE 452354 | 115 | 90 | 22 | 12.5 | 6.5 | 1.2 |
| DPE 472374 | 120 | 95 | 22 | 12.5 | 6.5 | 1.2 |
| DPE 492393 | 125 | 100 | 25 | 12.5 | 6.5 | 1.2 |
| DPE 531433 | 135 | 110 | 25 | 12.5 | 6.5 | 1.2 |
| DPE 551472 | 140 | 120 | 25 | 10.0 | 5.0 | 0.8 |
| DPE 570472 | 145 | 120 | 25 | 10.0 | 5.0 | 0.8 |
| DPE570492 | 145 | 125 | 25 | 10.0 | 5.0 | 0.8 |
| DPE 590492 | 150 | 125 | 25 | 12.5 | 6.5 | 1.2 |
| DPE 629511 | 160 | 130 | 25 | 15.0 | 7.5 | 1.2 |



Claron[®]Polyseal[®]
Double Acting Piston Seal

Imperial



DPE

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H11 ØD ₁ | js11 Ød ₁ | +0.025" +0.015" L ₁ | Nominal S | Minimum C | Maximum R ₁ |
|--------------------|------------------------|-------------------------|--------------------------------------|--------------|--------------|---------------------------|
| DPE 100062 | 1.000 | 0.625 | 0.468 | 0.187 | 0.093 | 0.008 |
| DPE 112062 | 1.125 | 0.625 | 0.500 | 0.250 | 0.125 | 0.015 |
| DPE 125075 | 1.250 | 0.750 | 0.625 | 0.250 | 0.125 | 0.015 |
| DPE 150100 | 1.500 | 1.000 | 0.625 | 0.250 | 0.125 | 0.015 |
| DPE 162112 | 1.625 | 1.125 | 0.625 | 0.250 | 0.125 | 0.015 |
| DPE 175112 | 1.750 | 1.125 | 0.750 | 0.312 | 0.156 | 0.025 |
| DPE 200137 | 2.000 | 1.375 | 0.750 | 0.312 | 0.156 | 0.025 |
| DPE 212150 | 2.125 | 1.500 | 0.750 | 0.312 | 0.156 | 0.025 |
| DPE 225162 | 2.250 | 1.625 | 0.750 | 0.312 | 0.156 | 0.025 |
| DPE 237175 | 2.375 | 1.750 | 0.750 | 0.312 | 0.156 | 0.025 |
| DPE 250187 | 2.500 | 1.875 | 0.750 | 0.312 | 0.156 | 0.025 |
| DPE 250187/1 | 2.500 | 1.875 | 0.937 | 0.312 | 0.156 | 0.025 |
| DPE 262200 | 2.625 | 2.000 | 0.750 | 0.312 | 0.156 | 0.025 |
| DPE 275200 | 2.750 | 2.000 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 300225 | 3.000 | 2.250 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 300225/1 | 3.000 | 2.250 | 1.125 | 0.375 | 0.187 | 0.031 |
| DPE 312237 | 3.125 | 2.375 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 325250 | 3.250 | 2.500 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 350275 | 3.500 | 2.750 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 375300 | 3.750 | 3.000 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 387312 | 3.875 | 3.125 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 400325 | 4.000 | 3.250 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 425350 | 4.250 | 3.500 | 0.937 | 0.375 | 0.187 | 0.031 |
| DPE 450350 | 4.500 | 3.500 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 450350/1 | 4.500 | 3.500 | 1.500 | 0.500 | 0.218 | 0.046 |
| DPE 475375 | 4.750 | 3.750 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 500400 | 5.000 | 4.000 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 525425 | 5.250 | 4.250 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 550450 | 5.500 | 4.500 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 550450/2 | 5.500 | 4.500 | 1.500 | 0.500 | 0.218 | 0.046 |
| DPE 575475 | 5.750 | 4.750 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 600500 | 6.000 | 5.000 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 650550 | 6.500 | 5.500 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 700600 | 7.000 | 6.000 | 1.250 | 0.500 | 0.218 | 0.046 |
| DPE 800700 | 8.000 | 7.000 | 1.250 | 0.500 | 0.218 | 0.046 |

Design

Designed for use on split pistons, the seal is a precision moulded rubber element with rubberised fabric reinforcements. Style DPW is fitted with clip on anti-extrusion bearing rings on the O.D. to allow larger machining clearances between the piston head and cylinder bore, and to permit higher working pressures. The Polyacetal bearing rings also support the piston head under side load conditions thus preventing metal to metal contact. The bearing rings are an integral part of the seal therefore react directly to operating pressures thus closing the extrusion gap. The seal is designed with sufficient radial sectional interference that on complete assembly low pressure sealing is effected. The supporting rubberised fabric has the capability of retaining the sealing media thus assisting in reducing friction and wear. Style DPW has proven to be effective over a wide range of applications.

Operating Conditions

| Maximum | Pressure |
|-------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids


| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing



For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

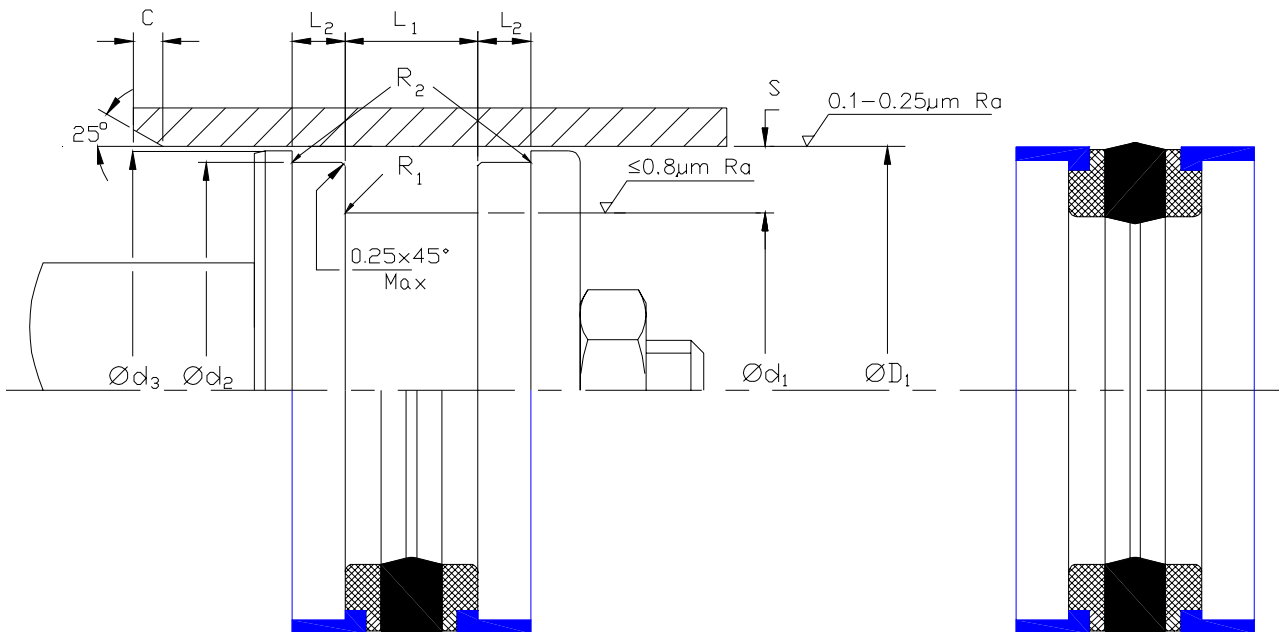


DPW



Nominal Dimensions & Machining Tolerances


| Claron Part Number | H11 | js11 | js10 | js11 | +0.63 +0.38 | +0.1 -0.0 | Nominal | Minimum | Maximum | Maximum |
|-----------------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|---------|---------|----------------|----------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | L ₁ | L ₂ | S | C | R ₁ | R ₂ |
| DPW 098047 | 25 | 12 | 21.45 | 23.75 | 12 | 6.35 | 6.5 | 2.5 | 0.4 | 0.2 |
| DPW 118066 | 30 | 17 | 26.45 | 28.95 | 15 | 6.35 | 6.5 | 2.5 | 0.4 | 0.2 |
| DPW 157094 | 40 | 24 | 35.40 | 38.65 | 18 | 6.35 | 8.0 | 4.0 | 0.4 | 0.2 |
| DPW 177114 | 45 | 29 | 40.40 | 43.65 | 18 | 6.35 | 8.0 | 4.0 | 0.4 | 0.2 |
| DPW 188125 | 48 | 32 | 43.35 | 46.65 | 18 | 6.35 | 8.0 | 4.0 | 0.4 | 0.2 |
| DPW 196133 | 50 | 34 | 45.40 | 48.65 | 18 | 6.35 | 8.0 | 4.0 | 0.4 | 0.2 |
| DPW 216153/1 | 55 | 39 | 50.40 | 53.65 | 18 | 6.35 | 8.0 | 4.0 | 0.4 | 0.2 |
| DPW 236173/1 | 60 | 44 | 55.40 | 58.65 | 18 | 6.35 | 8.0 | 4.0 | 0.4 | 0.2 |
| DPW 248185 | 63 | 47 | 58.40 | 61.65 | 19 | 6.35 | 8.0 | 4.0 | 0.4 | 0.2 |
| DPW 255196 | 65 | 50 | 60.40 | 63.65 | 18 | 6.35 | 7.5 | 4.0 | 0.6 | 0.2 |
| DPW 275196 | 70 | 50 | 64.15 | 68.35 | 22 | 6.35 | 10.0 | 5.0 | 0.8 | 0.2 |
| DPW 295216 | 75 | 55 | 69.15 | 73.35 | 22 | 6.35 | 10.0 | 5.0 | 0.8 | 0.2 |
| DPW 314236 | 80 | 60 | 74.15 | 78.35 | 22 | 6.35 | 10.0 | 5.0 | 0.8 | 0.2 |
| DPW 334255 | 85 | 65 | 79.15 | 83.35 | 22 | 6.35 | 10.0 | 5.0 | 0.8 | 0.2 |
| DPW 354275 | 90 | 70 | 84.15 | 88.35 | 22 | 6.35 | 10.0 | 5.0 | 0.8 | 0.2 |
| DPW 393295 | 100 | 75 | 93.15 | 98.00 | 22 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 393314 | 100 | 80 | 94.15 | 98.35 | 25 | 6.35 | 10.0 | 5.0 | 0.8 | 0.2 |
| DPW 413314 | 105 | 80 | 98.10 | 103.35 | 22 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 433334 | 110 | 85 | 103.10 | 108.00 | 25 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 433334/1 | 110 | 85 | 103.10 | 108.00 | 22 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 452354 | 115 | 90 | 108.10 | 113.00 | 22 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 472374 | 120 | 95 | 113.10 | 118.00 | 22 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 492393 | 125 | 100 | 118.10 | 123.00 | 25 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 531433 | 135 | 110 | 128.00 | 133.00 | 25 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 543433 | 138 | 110 | 131.00 | 136.00 | 25 | 6.35 | 14.0 | 7.5 | 1.2 | 0.4 |
| DPW 551472 | 140 | 120 | 134.05 | 138.35 | 25 | 6.35 | 10.0 | 5.0 | 0.8 | 0.2 |
| DPW 570472 | 145 | 120 | 138.30 | 143.00 | 25 | 6.35 | 10.0 | 5.0 | 0.8 | 0.2 |
| DPW 590492 | 150 | 125 | 143.00 | 148.00 | 25 | 6.35 | 12.5 | 6.5 | 1.2 | 0.4 |
| DPW 629511 | 160 | 130 | 153.00 | 158.00 | 25 | 6.35 | 15.0 | 7.5 | 1.2 | 0.4 |



ClaronPolyseal®


Double Acting Piston Seal Imperial

DPW




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H11 ØD ₁ | js11 Ød ₁ | js10 Ød ₂ | js11 Ød ₃ | +0.025" +0.015" L ₁ | +0.004 -0.000 L ₂ | Nominal S | Minimum C | Maximum R ₁ | Maximum R ₂ |
|--------------------|------------------------|-------------------------|-------------------------|-------------------------|--------------------------------------|------------------------------------|--------------|--------------|---------------------------|---------------------------|
| DPW 100062 | 1.000 | 0.625 | 0.883 | 0.964 | 0.468 | 0.250 | 0.187 | 0.093 | 0.008 | 0.008 |
| DPW 112062 | 1.125 | 0.625 | 0.986 | 1.083 | 0.500 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| DPW 125075 | 1.250 | 0.750 | 1.111 | 1.208 | 0.625 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| DPW 150100 | 1.500 | 1.000 | 1.360 | 1.458 | 0.625 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| DPW 150100/S | 1.500 | 1.000 | 1.360 | 1.458 | 0.625 | 0.188 | 0.250 | 0.125 | 0.015 | 0.008 |
| DPW 162112 | 1.625 | 1.125 | 1.485 | 1.583 | 0.625 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| DPW 175112 | 1.750 | 1.125 | 1.570 | 1.698 | 0.750 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| DPW 200137 | 2.000 | 1.375 | 1.820 | 1.948 | 0.750 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| DPW 212150 | 2.125 | 1.500 | 1.944 | 2.074 | 0.750 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| DPW 225162 | 2.250 | 1.625 | 2.069 | 2.197 | 0.750 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| DPW 237175 | 2.375 | 1.750 | 2.194 | 2.322 | 0.750 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| DPW 250187 | 2.500 | 1.875 | 2.319 | 2.446 | 0.750 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| DPW 250187/1 | 2.500 | 1.875 | 2.302 | 2.437 | 0.937 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| DPW 262200 | 2.625 | 2.000 | 2.443 | 2.571 | 0.750 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| DPW 275200 | 2.750 | 2.000 | 2.522 | 2.685 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 300225 | 3.000 | 2.250 | 2.772 | 2.935 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 300225/1 | 3.000 | 2.250 | 2.772 | 2.935 | 1.125 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 312237 | 3.125 | 2.375 | 2.896 | 3.060 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 325250 | 3.250 | 2.500 | 3.021 | 3.184 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 350275 | 3.500 | 2.750 | 3.271 | 3.434 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 375300 | 3.750 | 3.000 | 3.520 | 3.683 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 387312 | 3.875 | 3.125 | 3.646 | 3.809 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 400325 | 4.000 | 3.250 | 3.770 | 3.933 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 425350 | 4.250 | 3.500 | 4.019 | 4.182 | 0.937 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| DPW 450350 | 4.500 | 3.500 | 4.229 | 4.422 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 450350/1 | 4.500 | 3.500 | 4.229 | 4.422 | 1.500 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 475375 | 4.750 | 3.750 | 4.478 | 4.671 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 500400 | 5.000 | 4.000 | 4.728 | 4.921 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 525425 | 5.250 | 4.250 | 4.977 | 5.170 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 550450 | 5.500 | 4.500 | 5.227 | 5.420 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 550450/2 | 5.500 | 4.500 | 5.232 | 5.437 | 1.500 | 0.370 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 575475 | 5.750 | 4.750 | 5.475 | 5.669 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 600500 | 6.000 | 5.000 | 5.726 | 5.919 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 650550 | 6.500 | 5.500 | 6.226 | 6.419 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 700600 | 7.000 | 6.000 | 6.724 | 6.917 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 800700 | 8.000 | 7.000 | 7.723 | 7.915 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| DPW 950850 | 9.500 | 8.500 | 9.225 | 9.418 | 1.250 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |



Claron Polyseal® Double Acting Piston Seal Metric DPW/L Imperial



Design

Designed for use on split pistons, the seal is a precision moulded rubber element with rubberised fabric reinforcements as style DP but with additional full width Polyacetal anti-extrusion bearing rings at each end to allow larger machining clearances between the piston head and cylinder bore, and to permit higher working pressures. The Polyacetal bearing rings also support the piston head under side load conditions thus preventing metal to metal contact. The seal is designed with sufficient radial sectional interference that on complete assembly low pressure sealing is effected. The supporting rubberised fabric has the capability of retaining the sealing media thus assisting in reducing friction and wear. Style DPW/L has proven to be effective over a wide range of applications and is a popular alternative for existing housing designs.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids


| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting


For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

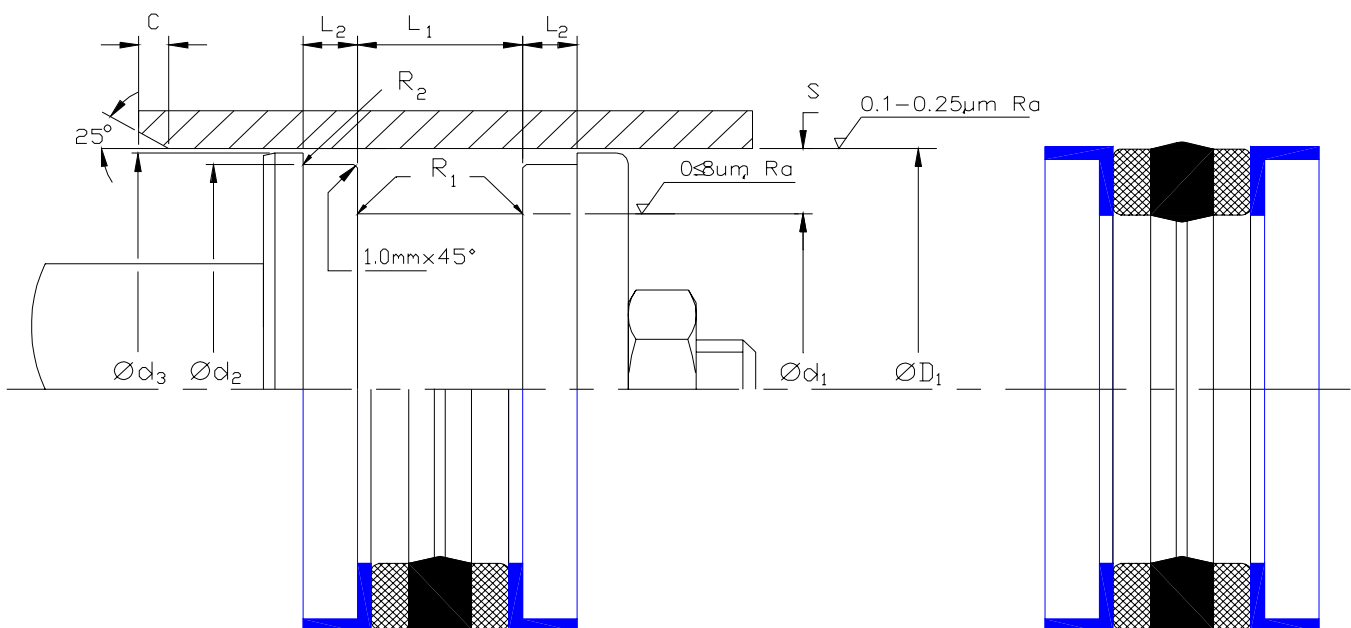



ClaronPolyseal®
Double Acting Piston Seal


Metric




DPW/L

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H11 | Js11 | h9 | js11 | +0.25 -0.00 | +0.00 -0.15 | Nominal S | Minimum C | Maximum | |
|-----------------------|-----------------|-----------------|-----------------|-----------------|----------------|----------------|--------------|--------------|----------------|----------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | L ₁ | L ₂ | | | R ₁ | R ₂ |
| DPW 098059/L | 25 | 15.0 | 21.80 | 24.0 | 15.5 | 5.00 | 5.00 | 2.5 | 0.2 | |
| DPW 125086/L | 32 | 22.0 | 28.80 | 31.0 | 15.5 | 5.00 | 5.00 | 2.5 | 0.2 | |
| DPW 137087/L | 35 | 22.3 | 31.52 | 34.0 | 19.4 | 6.30 | 6.35 | 3.0 | 0.2 | |
| DPW 157098/1L | 40 | 25.0 | 34.80 | 39.0 | 24.0 | 6.00 | 7.50 | 4.0 | 0.2 | |
| DPW 177102/L | 45 | 26.0 | 38.80 | 43.0 | 31.0 | 6.50 | 9.50 | 3.5 | 0.2 | |
| DPW 196137/1L | 50 | 35.0 | 44.80 | 48.5 | 24.0 | 6.00 | 7.50 | 4.0 | 0.2 | |
| DPW 216157/L | 55 | 40.0 | 49.80 | 53.5 | 24.0 | 6.00 | 7.50 | 4.0 | 0.2 | |
| DPW 236157/1L | 60 | 40.0 | 53.80 | 58.5 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 248169/L | 63 | 43.0 | 56.80 | 61.5 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 248188/L | 63 | 48.0 | 57.80 | 61.5 | 24.0 | 6.00 | 7.50 | 4.0 | 0.2 | |
| DPW 275196/2L | 70 | 50.0 | 63.80 | 68.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 314236/2L | 80 | 60.0 | 73.80 | 78.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 354275/1L | 90 | 70.0 | 83.80 | 88.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 393314/L | 100 | 80.0 | 93.80 | 98.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 433354/L | 110 | 90.0 | 103.80 | 108.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 472393/L | 120 | 100.0 | 113.80 | 118.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 492393/2L | 125 | 100.0 | 118.80 | 123.0 | 38.0 | 9.50 | 12.50 | 6.5 | 0.4 | |
| DPW 551472/L | 140 | 120.0 | 133.80 | 138.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 570492/L | 145 | 125.0 | 138.80 | 143.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |
| DPW 590492/1L | 150 | 125.0 | 143.50 | 148.0 | 38.0 | 6.45 | 12.50 | 6.5 | 0.4 | |
| DPW 629531/L | 160 | 135.0 | 153.80 | 158.0 | 38.0 | 9.50 | 12.50 | 6.5 | 0.4 | |
| DPW 629551/L | 160 | 140.0 | 153.80 | 158.0 | 31.0 | 7.00 | 10.00 | 5.0 | 0.2 | |





ClaronPolyseal®
Double Acting Piston Seal Imperial
DPW/L



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H11 | Js11 | h9 | js11 | +0.025" +0.015" | +0.005" -0.000 | Nominal S | Minimum C | Maximum | |
|-----------------------|-----------------|-----------------|-----------------|-----------------|--------------------|-------------------|--------------|--------------|----------------|----------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | L ₁ | L ₂ | | | R ₁ | R ₂ |
| DPW 075037/1L | 0.750 | 0.375 | 0.615 | 0.718 | 0.593 | 0.182 | 0.187 | 0.093 | 0.008 | |
| DPW 100062/L | 1.000 | 0.625 | 0.865 | 0.968 | 0.593 | 0.182 | 0.187 | 0.093 | 0.008 | |
| DPW 112062/1L | 1.125 | 0.625 | 0.990 | 1.093 | 0.750 | 0.241 | 0.250 | 0.125 | 0.008 | |
| DPW 125075/L | 1.250 | 0.750 | 1.115 | 1.218 | 0.750 | 0.245 | 0.250 | 0.125 | 0.008 | |
| DPW 137087/L | 1.375 | 0.875 | 1.241 | 1.343 | 0.750 | 0.245 | 0.250 | 0.125 | 0.008 | |
| DPW 150100/L | 1.500 | 1.000 | 1.365 | 1.468 | 0.750 | 0.245 | 0.250 | 0.125 | 0.008 | |
| DPW 162100/L | 1.625 | 1.000 | 1.428 | 1.562 | 0.937 | 0.245 | 0.312 | 0.156 | 0.008 | |
| DPW 175112/L | 1.750 | 1.125 | 1.552 | 1.687 | 0.937 | 0.245 | 0.312 | 0.156 | 0.008 | |
| DPW 200137/L | 2.000 | 1.375 | 1.802 | 1.937 | 0.937 | 0.245 | 0.312 | 0.156 | 0.008 | |
| DPW 225162/L | 2.250 | 1.625 | 2.052 | 2.187 | 0.937 | 0.245 | 0.312 | 0.156 | 0.008 | |
| DPW 237175/L | 2.375 | 1.750 | 2.177 | 2.312 | 0.937 | 0.245 | 0.312 | 0.156 | 0.008 | |
| DPW 250187/L | 2.500 | 1.875 | 2.302 | 2.437 | 0.937 | 0.245 | 0.312 | 0.156 | 0.008 | |
| DPW 262200/L | 2.625 | 2.000 | 2.428 | 2.562 | 0.937 | 0.245 | 0.312 | 0.156 | 0.008 | |
| DPW 275200/L | 2.750 | 2.000 | 2.482 | 2.687 | 1.187 | 0.245 | 0.375 | 0.187 | 0.008 | |
| DPW 300225/L | 3.000 | 2.250 | 2.732 | 2.937 | 1.187 | 0.245 | 0.375 | 0.187 | 0.008 | |
| DPW 300225/4L | 3.000 | 2.250 | 2.732 | 2.937 | 0.843 | 0.245 | 0.375 | 0.187 | 0.008 | |
| DPW 325250/L | 3.250 | 2.500 | 2.982 | 3.187 | 1.187 | 0.245 | 0.375 | 0.187 | 0.008 | |
| DPW 350275/L | 3.500 | 2.750 | 3.232 | 3.437 | 1.187 | 0.245 | 0.375 | 0.187 | 0.008 | |
| DPW 375300/L | 3.750 | 3.000 | 3.482 | 3.687 | 1.187 | 0.245 | 0.375 | 0.187 | 0.008 | |
| DPW 400325/L | 4.000 | 3.250 | 3.732 | 3.937 | 1.187 | 0.245 | 0.375 | 0.187 | 0.008 | |
| DPW 425350/L | 4.250 | 3.500 | 3.982 | 4.187 | 1.187 | 0.245 | 0.375 | 0.187 | 0.008 | |
| DPW 450350/L | 4.500 | 3.500 | 4.232 | 4.437 | 1.500 | 0.370 | 0.500 | 0.218 | 0.015 | |
| DPW 475375/L | 4.750 | 3.750 | 4.482 | 4.687 | 1.500 | 0.370 | 0.500 | 0.218 | 0.015 | |
| DPW 500400/L | 5.000 | 4.000 | 4.732 | 4.937 | 1.500 | 0.370 | 0.500 | 0.218 | 0.015 | |
| DPW 525425/L | 5.250 | 4.250 | 4.982 | 5.187 | 1.500 | 0.370 | 0.500 | 0.218 | 0.015 | |
| DPW 550450/L | 5.500 | 4.500 | 5.232 | 5.437 | 1.500 | 0.370 | 0.500 | 0.218 | 0.015 | |
| DPW 600500/L | 6.000 | 5.000 | 5.732 | 5.937 | 1.500 | 0.370 | 0.500 | 0.218 | 0.015 | |
| DPW 650550/L | 6.500 | 5.500 | 6.232 | 6.437 | 1.500 | 0.370 | 0.500 | 0.218 | 0.015 | |
| DPW 700600/L | 7.000 | 6.000 | 6.732 | 6.937 | 1.500 | 0.370 | 0.500 | 0.218 | 0.015 | |



Design

Designed for use on one piece pistons, the three part assembly consists of an endless precision rubber moulded sealing element supported at each end with split polyester support rings.

The seal is also suitable for existing two piece pistons of the same housing dimensions.

Operating Conditions


| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Maximum Diametral Clearance F Pressure Bar

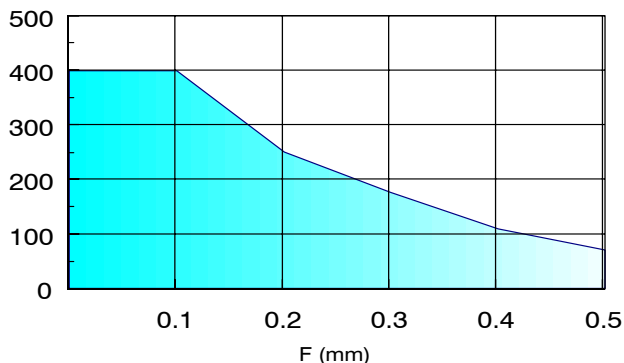

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

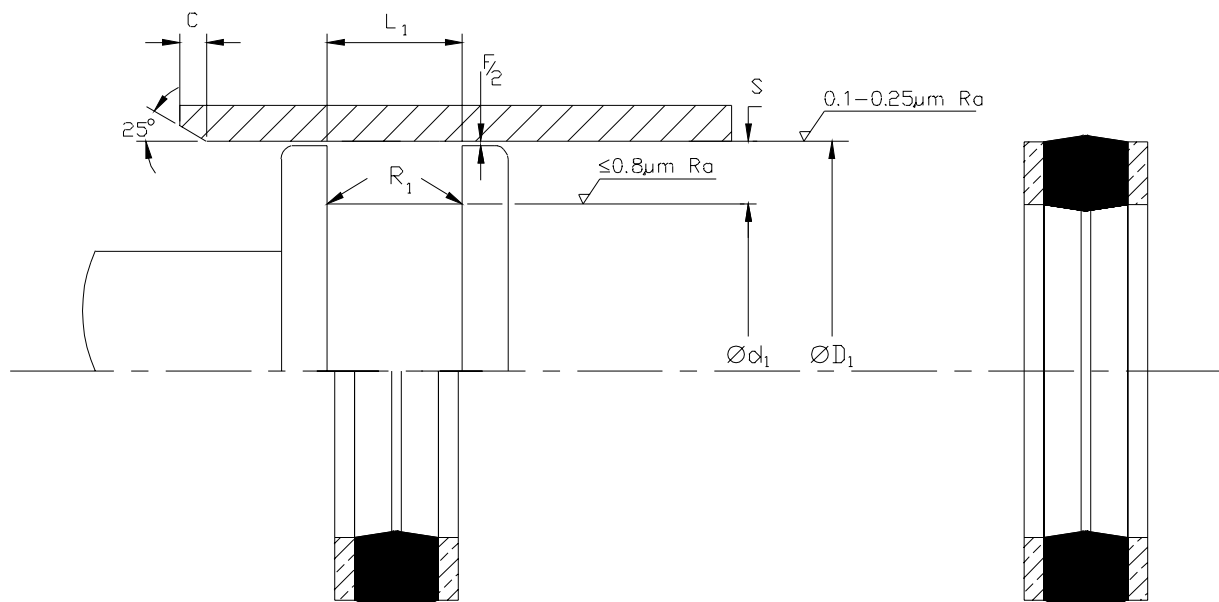




ClaronPolyseal®
Double Acting Piston Seal

JS.../H

Imperial



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H11 | js11 | +0.025 +0.015 | Nominal | Minimum | Maximum |
|-----------------------|-------------------|-------------------|------------------|---------|---------|---------|
| | $\varnothing D_1$ | $\varnothing d_1$ | L_1 | S | C | R_1 |
| JS 112/H | 1.125 | 0.750 | 0.452 | 0.187 | 0.090 | 0.008 |
| JS 137/H | 1.375 | 1.000 | 0.452 | 0.187 | 0.090 | 0.008 |
| JS 150/H | 1.500 | 1.125 | 0.452 | 0.187 | 0.090 | 0.008 |
| JS 162/H | 1.625 | 1.250 | 0.452 | 0.187 | 0.090 | 0.008 |
| JS 175/H | 1.750 | 1.375 | 0.452 | 0.187 | 0.090 | 0.008 |
| JS 200/H | 2.000 | 1.500 | 0.587 | 0.250 | 0.125 | 0.008 |
| JS 225/H | 2.250 | 1.750 | 0.587 | 0.250 | 0.125 | 0.008 |
| JS 250/H | 2.500 | 2.000 | 0.587 | 0.250 | 0.125 | 0.008 |
| JS 300/H | 3.000 | 2.500 | 0.587 | 0.250 | 0.125 | 0.008 |
| JS 325/H | 3.250 | 2.750 | 0.587 | 0.250 | 0.125 | 0.008 |
| JS 350/H | 3.500 | 3.000 | 0.587 | 0.250 | 0.125 | 0.008 |
| JS 375/H | 3.750 | 3.250 | 0.587 | 0.250 | 0.125 | 0.008 |
| JS 400/H | 4.000 | 3.250 | 0.780 | 0.375 | 0.187 | 0.008 |
| JS 450/H | 4.500 | 3.750 | 0.780 | 0.375 | 0.187 | 0.008 |
| JS 500/H | 5.000 | 4.250 | 0.780 | 0.375 | 0.187 | 0.008 |
| JS 550/H | 5.500 | 4.750 | 0.780 | 0.375 | 0.187 | 0.008 |



ClaronPolyseal®

Double Acting Piston Seal

DPDS

Metric
Imperial



Design

Claron Style DPDS double acting piston seal is a 5 piece assembly consisting of a Nitrile Rubber sealing element supported by 2 thermoplastic elastomer headers with Acetal anti-extrusion bearing rings on the O.D. The complete assembly forms a highly robust sealing unit for use in high pressure applications where shock loads and pressure spikes are present. This seal is widely used in the mobile plant industry.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 325 Bar |
| 0.15 | 600 Bar |

These range parameters are Maximum simultaneous conditions.

These range parameters are Maximum conditional values.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style DPDS is designed to be fitted onto a split piston as shown in the illustration below.

The seal can be supplied split to ease fitting if required. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

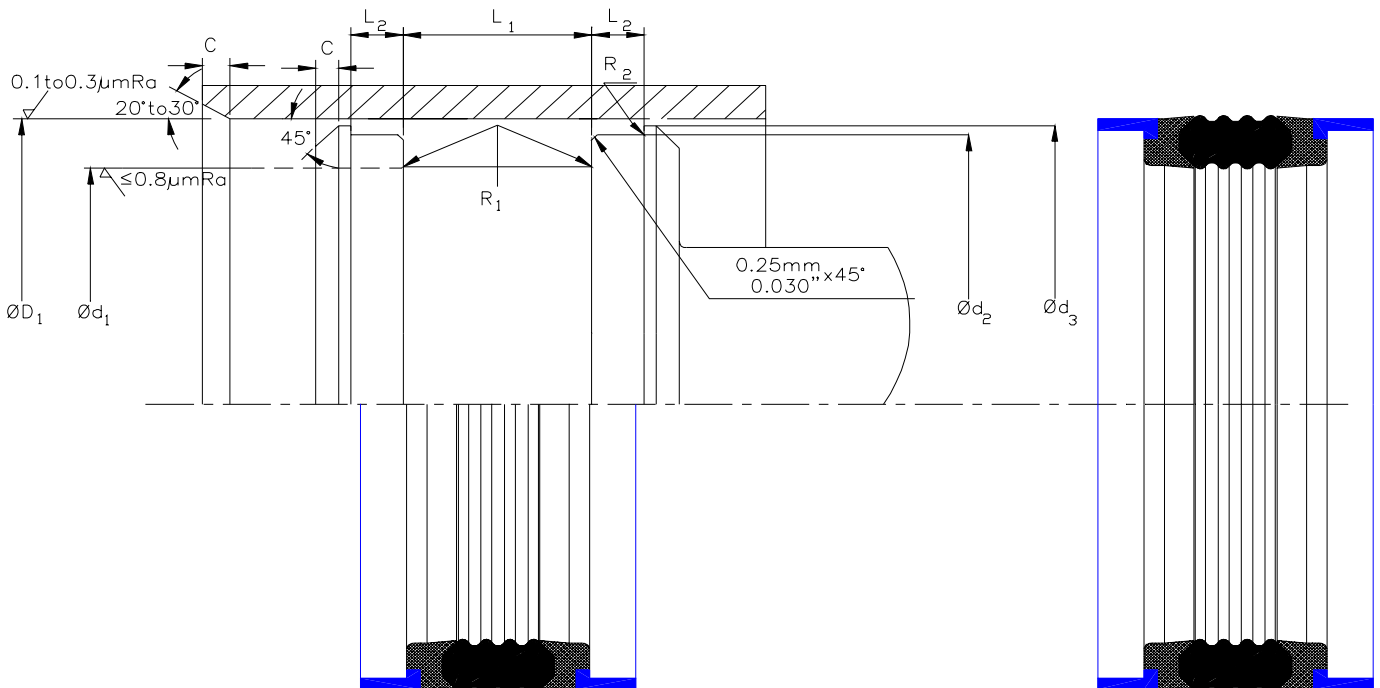



ClaronPolyseal®
Double Acting Piston Seal

Metric



DPDS

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 11 | h 10 | js 10 | js 11 | +0.6 +0.4 L ₁ | +0.2 -0.0 L ₂ | S | Min | Max. |
|-----------------------|-----------------|-----------------|-----------------|-----------------|--------------------------------|--------------------------------|-------|------|-------------------------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | | | | C | R ₁ R ₂ |
| DPDS 228165 | 58.00 | 42.00 | 51.10 | 56.00 | 32.00 | 9.52 | 8.00 | 4.00 | 0.40 |
| DPDS 393314 | 100.00 | 80.00 | 92.60 | 97.50 | 35.00 | 9.52 | 10.00 | 5.00 | 0.40 |
| DPDS 433354 | 110.00 | 90.00 | 102.60 | 107.40 | 35.00 | 9.52 | 10.00 | 5.00 | 0.40 |
| DPDS 492393 | 125.00 | 100.00 | 116.80 | 122.30 | 45.00 | 12.70 | 12.50 | 6.50 | 0.40 |





ClaronPolyseal®
 Double Acting Piston Seal Imperial
DPDS



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 11 | h 10 | js 10 | js 11 | +0.025 +0.015 L ₁ | +0.005 -0.000 L ₂ | S | Min | Max. |
|-----------------------|-----------------|-----------------|-----------------|-----------------|------------------------------------|------------------------------------|-------|-------|-------------------------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | | | | C | R ₁ R ₂ |
| DPDS 362287 | 3.625 | 2.875 | 3.330 | 3.530 | 1.375 | 0.375 | 0.375 | 0.187 | 0.008 |
| DPDS 400325 | 4.000 | 3.250 | 3.710 | 3.900 | 1.375 | 0.375 | 0.375 | 0.187 | 0.008 |
| DPDS 450350 | 4.500 | 3.500 | 4.180 | 4.400 | 1.750 | 0.500 | 0.500 | 0.218 | 0.015 |
| DPDS 500400 | 5.000 | 4.000 | 4.675 | 4.900 | 1.750 | 0.500 | 0.500 | 0.218 | 0.015 |
| DPDS 600500 | 6.000 | 5.000 | 5.675 | 5.900 | 1.750 | 0.500 | 0.500 | 0.218 | 0.015 |

Double Acting Piston Seal Metric SFD



Design


Claron Style SFD is a single acting piston seal which may also be arranged back to back in pairs to form a double acting piston assembly. The sealing element is manufactured from fabric reinforced Nitrile Rubber with either an Acetal or fabric reinforced Header ring. The seal assembly forms a highly robust unit resistant to shock loads and high pressures typically found in mobile plant equipment.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.80 | 400 Bar |
| 0.15 | 600 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to appendix 1 for further information.

Maximum Diametral Clearance F

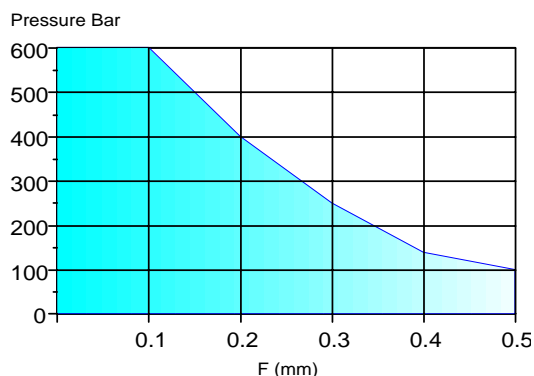

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.



Fitting

Style SFD is designed to fit back to back on a split piston. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

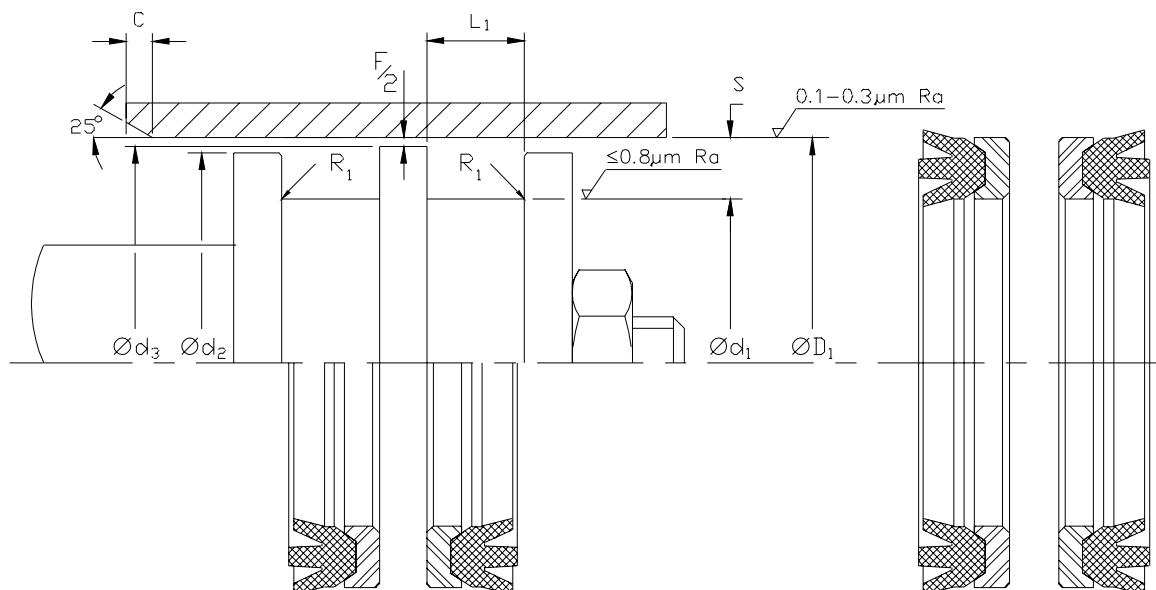



SFD



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 ØD ₁ | h11 Ød ₁ | +0.0 -0.3 Ød ₂ | e8 Ød ₃ | +0.3 -0.0 L ₁ | Nominal S | Minimum C | Maximum R ₁ |
|----------------------|-----------------------|------------------------|---------------------------------|-----------------------|--------------------------------|--------------|--------------|---------------------------|
| SFD 157098 | 40.00 | 25.00 | 39.00 | 40.00 | 9.50 | 7.50 | 4.00 | 0.80 |
| SFD 196137 | 50.00 | 35.00 | 49.00 | 50.00 | 9.50 | 7.50 | 4.00 | 0.80 |
| SFD 248188 | 63.00 | 48.00 | 62.00 | 63.00 | 9.50 | 7.50 | 4.00 | 0.80 |
| SFD 275196 | 70.00 | 50.00 | 68.50 | 70.00 | 12.50 | 10.00 | 5.00 | 0.80 |
| SFD 314236 | 80.00 | 60.00 | 78.50 | 80.00 | 12.50 | 10.00 | 5.00 | 0.80 |
| SFD 314236-FH | 80.00 | 60.00 | 78.50 | 80.00 | 12.50 | 10.00 | 5.00 | 0.80 |
| SFD 354275 | 90.00 | 70.00 | 88.50 | 90.00 | 12.50 | 10.00 | 5.00 | 0.80 |
| SFD 393314 | 100.00 | 80.00 | 98.50 | 100.00 | 12.50 | 10.00 | 5.00 | 0.80 |
| SFD 393314-FH | 100.00 | 80.00 | 98.50 | 100.00 | 12.50 | 10.00 | 5.00 | 0.80 |
| SFD 413334 | 105.00 | 85.00 | 103.50 | 105.00 | 12.50 | 10.00 | 5.00 | 0.80 |
| SFD 413334/1FH | 105.00 | 85.00 | 103.50 | 105.00 | 13.50 | 10.00 | 5.00 | 0.80 |
| SFD 433354-FH | 110.00 | 90.00 | 108.50 | 110.00 | 12.50 | 10.00 | 5.00 | 0.80 |
| SFD 452354 | 115.00 | 90.00 | 113.50 | 115.00 | 15.50 | 12.50 | 6.50 | 1.20 |
| SFD 452354-FH | 115.00 | 90.00 | 113.50 | 115.00 | 15.50 | 12.50 | 6.50 | 1.20 |
| SFD 492393 | 125.00 | 100.00 | 123.50 | 125.00 | 15.50 | 12.50 | 6.50 | 1.20 |
| SFD 492393-FH | 125.00 | 100.00 | 123.50 | 125.00 | 15.50 | 12.50 | 6.50 | 1.20 |
| SFD 511413 | 130.00 | 105.00 | 128.50 | 130.00 | 17.00 | 12.50 | 6.50 | 1.20 |
| SFD 551472 | 140.00 | 120.00 | 138.50 | 140.00 | 15.00 | 10.00 | 5.00 | 0.80 |
| SFD 551472-FH | 140.00 | 120.00 | 138.50 | 140.00 | 15.00 | 10.00 | 5.00 | 0.80 |

Items in **BOLD** are to suit ISO 5597 housings.
 Suffix FH denotes Fabric reinforced header.



Design

Designed for use on one piece pistons, the seal assembly consists of a filled PTFE high performance outer sleeve, pre loaded and pressure energised by a precision moulded NBR element. These two components are protected from extrusion at either side by the fitting of two low friction plastic anti-extrusion rings making the seal highly resistant to shock loads as found in heavy duty mobile equipment. The housing dimensions are those used in standard metric J.I.S. cylinders.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -30°C to 80°C | -30°C to 100°C |
| 4 | 350 Bar | 280 Bar |
| 2 | 500 Bar | 400 Bar |

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

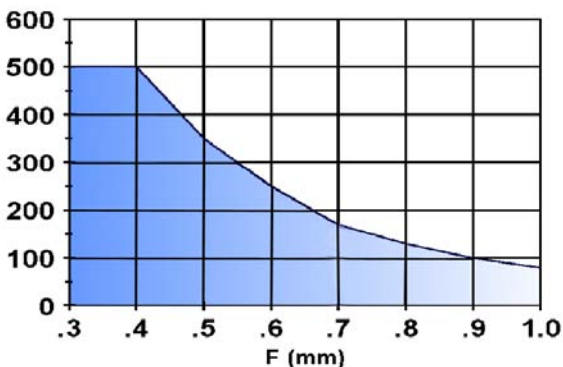

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.



Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

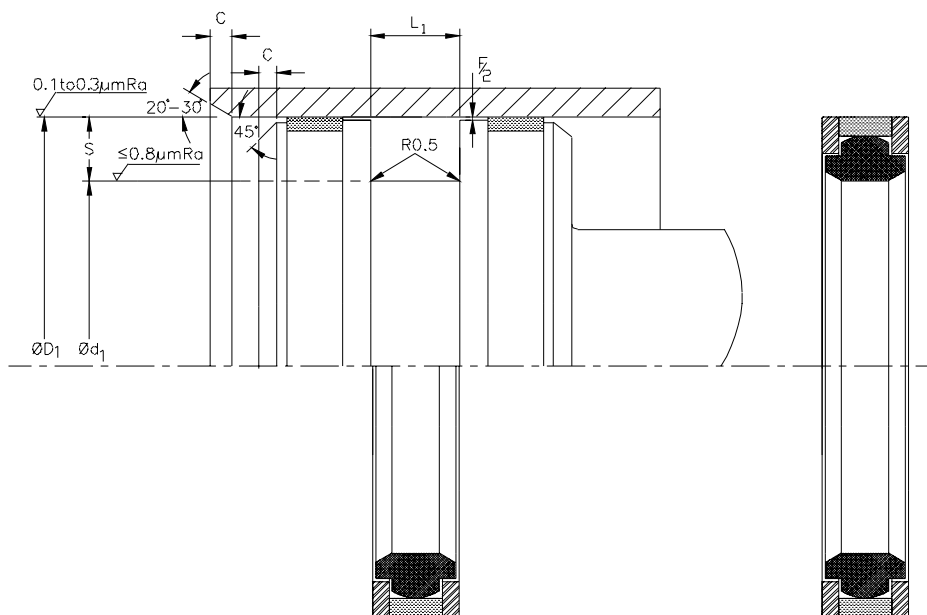

SPW



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | +0.00 | +0.20 | Nominal |
|-----------------------|-----------------|--------------------------|-------------------------|---------|
| | ØD ₁ | -0.20 Ød ₁ | -0.00 L ₁ | |
| | | | | C |
| SPW 050 | 50 | 36 | 9.0 | 4.0 |
| SPW 060 | 60 | 46 | 9.0 | 4.0 |
| SPW 065 | 65 | 50 | 11.0 | 5.0 |
| SPW 070 | 70 | 55 | 11.0 | 5.0 |
| SPW 075 | 75 | 60 | 11.0 | 5.0 |
| SPW 080 | 80 | 65 | 11.0 | 5.0 |
| SPW 085 | 85 | 70 | 11.0 | 5.0 |
| SPW 090 | 90 | 75 | 11.0 | 5.0 |
| SPW 095 | 95 | 80 | 11.0 | 5.0 |
| SPW 100 | 100 | 85 | 12.5 | 5.0 |
| SPW 105 | 105 | 90 | 12.5 | 5.0 |
| SPW 108 | 108 | 93 | 12.5 | 5.0 |
| SPW 110 | 110 | 95 | 12.5 | 5.0 |
| SPW 115 | 115 | 100 | 12.5 | 6.5 |
| SPW 120 | 120 | 105 | 12.5 | 6.5 |
| SPW 125 | 125 | 102 | 16.0 | 6.5 |
| SPW 130 | 130 | 107 | 16.0 | 6.5 |
| SPW 135 | 135 | 112 | 16.0 | 6.5 |
| SPW 140 | 140 | 117 | 16.0 | 6.5 |
| SPW 145 | 145 | 122 | 16.0 | 6.5 |
| SPW 150 | 150 | 127 | 16.0 | 6.5 |
| SPW 160 | 160 | 137 | 16.0 | 6.5 |
| SPW 165 | 165 | 142 | 16.0 | 6.5 |
| SPW 170 | 170 | 147 | 16.0 | 6.5 |
| SPW 180 | 180 | 157 | 16.0 | 6.5 |
| SPW 185 | 185 | 162 | 16.0 | 6.5 |
| SPW 190 | 190 | 167 | 16.0 | 6.5 |
| SPW 200 | 200 | 177 | 16.0 | 6.5 |
| SPW 210 | 210 | 187 | 16.0 | 6.5 |
| SPW 220 | 220 | 197 | 16.0 | 6.5 |
| SPW 225 | 225 | 202 | 16.0 | 6.5 |
| SPW 250 | 250 | 222 | 17.5 | 7.5 |

CSPG



Design

Claron composite seals Style CSPG are designed as high pressure, Low Friction Double-Acting Piston Seals for use in heavy duty hydraulic cylinders as found in mobile equipment to American designs.

Materials

Claron Style CSPG consists of a glass filled high performance P.T.F.E. sealing element, energised by a precision moulded rectangular section NBR rubber.

Operating Range

Temp -40°C to 120°C

Pressure upto 800 bar

Velocity upto 15m/s

These range parameters are maximum conditional values.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Operating Conditions

Maximum Working Pressure for "Standard" seal applications using specified tolerances and clearances.

Temp. range

-30°C to 80°C

800bar


Temp. range

80°C to 120°C

350 bar

Diametrical Clearance F shown in the graph is calculated as the maximum permissible extrusion gap, allowing for movement due to side load, for various pressures and temperatures upto 80°C. This product is intended for use with either **STYLE PBR** or **STYLE BGF** Bearing Rings which effectively reduce the **Radial clearance** to a value nearer to F/2 thus increasing the pressure capability.

The maximum seal extrusion gap should be calculated allowing for all tolerances, movement and cylinder expansion. For pressures > 400 bar, the seal extrusion gap should be reduced by utilising smaller tolerances. e.g H8 for Cylinder bore, f8 for piston diameter either side of the seal.

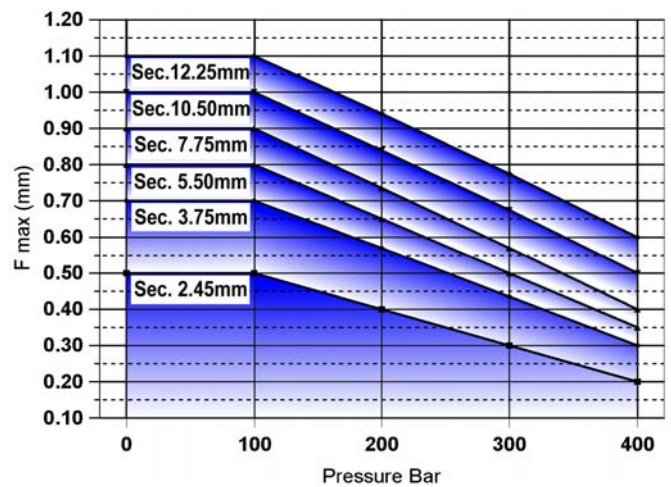


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

CSPG

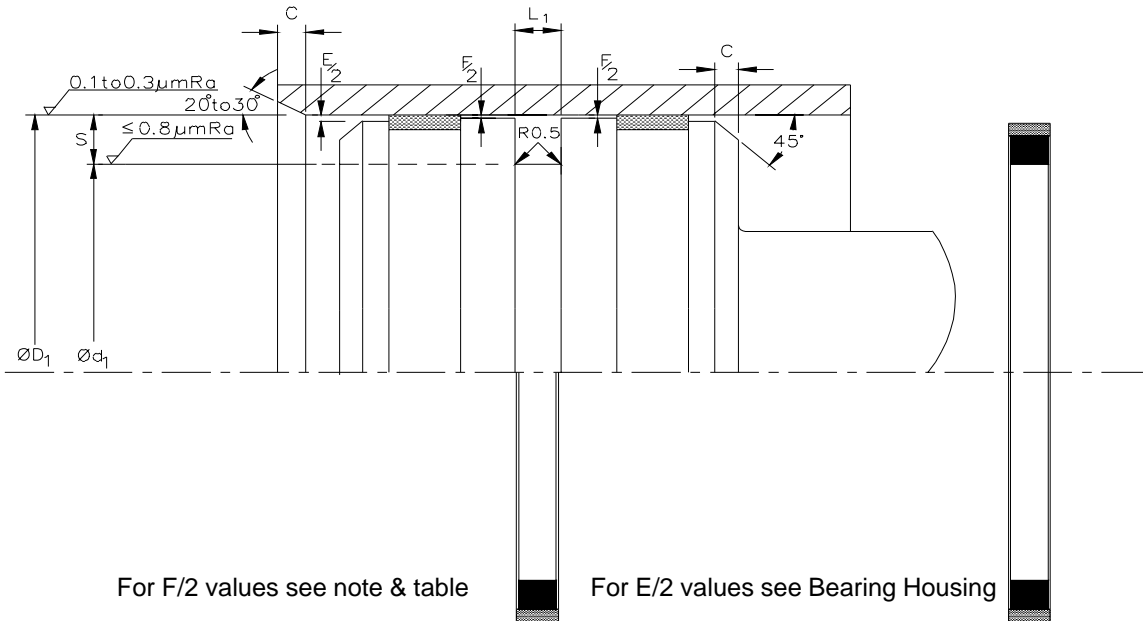

| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | |
|--------------------|---|-----------------------------------|----------------------------------|--------------|--------------|
| | H9 ØD ₁ | +0.00 -0.20 Ød ₁ | +0.10 -0.00 L ₁ | Nominal S | Nominal C |
| CSPG0200 | 2.000 | 1.625 | 0.190 | 0.187 | 0.100 |
| CSPG0250 | 2.500 | 2.125 | 0.190 | 0.187 | 0.100 |
| CSPG0275 | 2.750 | 2.375 | 0.190 | 0.187 | 0.100 |
| CSPG0300 | 3.000 | 2.468 | 0.190 | 0.268 | 0.150 |
| CSPG0325 | 3.250 | 2.718 | 0.190 | 0.268 | 0.150 |
| CSPG0350 | 3.500 | 2.968 | 0.190 | 0.268 | 0.150 |
| CSPG0375 | 3.750 | 3.218 | 0.190 | 0.333 | 0.150 |
| CSPG0400 | 4.000 | 3.338 | 0.250 | 0.333 | 0.180 |
| CSPG0425 | 4.250 | 3.588 | 0.250 | 0.333 | 0.180 |
| CSPG0450 | 4.500 | 3.838 | 0.250 | 0.333 | 0.180 |
| CSPG0475 | 4.750 | 4.088 | 0.250 | 0.383 | 0.180 |
| CSPG0500 | 5.000 | 4.238 | 0.375 | 0.383 | 0.200 |
| CSPG0525 | 5.250 | 4.488 | 0.375 | 0.383 | 0.200 |
| CSPG0550 | 5.500 | 4.738 | 0.375 | 0.383 | 0.200 |
| CSPG0600 | 6.000 | 5.102 | 0.375 | 0.451 | 0.250 |
| CSPG0625 | 6.250 | 5.352 | 0.375 | 0.451 | 0.250 |
| CSPG0650 | 6.500 | 5.602 | 0.375 | 0.451 | 0.250 |
| CSPG0700 | 7.000 | 6.102 | 0.375 | 0.451 | 0.250 |
| CSPG0725 | 7.250 | 6.352 | 0.375 | 0.451 | 0.250 |
| CSPG0825 | 8.250 | 7.230 | 0.375 | 0.512 | 0.260 |
| CSPG0925 | 9.250 | 8.230 | 0.375 | 0.512 | 0.260 |
| CSPG1050 | 10.500 | 9.420 | 0.437 | 0.542 | 0.260 |



Design


Designed for use on one piece pistons, Claron Style CS8 consists of a precision moulded high performance 98°Shore Polyurethane outer sleeve, pre loaded and pressure energised by a square section NBR 80°Shore rubber element. The compact design allows smaller width pistons to be used, and offers excellent wear resistance on a wide range of surface finishes.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -30°C to 80°C | -30°C to 100°C |
| 1.0 | 280 Bar | 250 Bar |
| 0.5 | 450 Bar | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F Pressure Bar

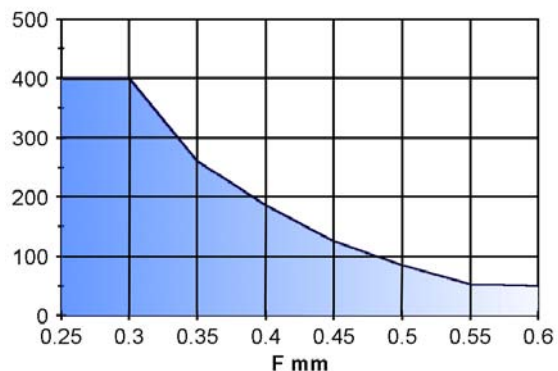

Continuous operating temperature for various fluids

| Polyurethane / Nitrile Composite | | |
|----------------------------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | NS |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

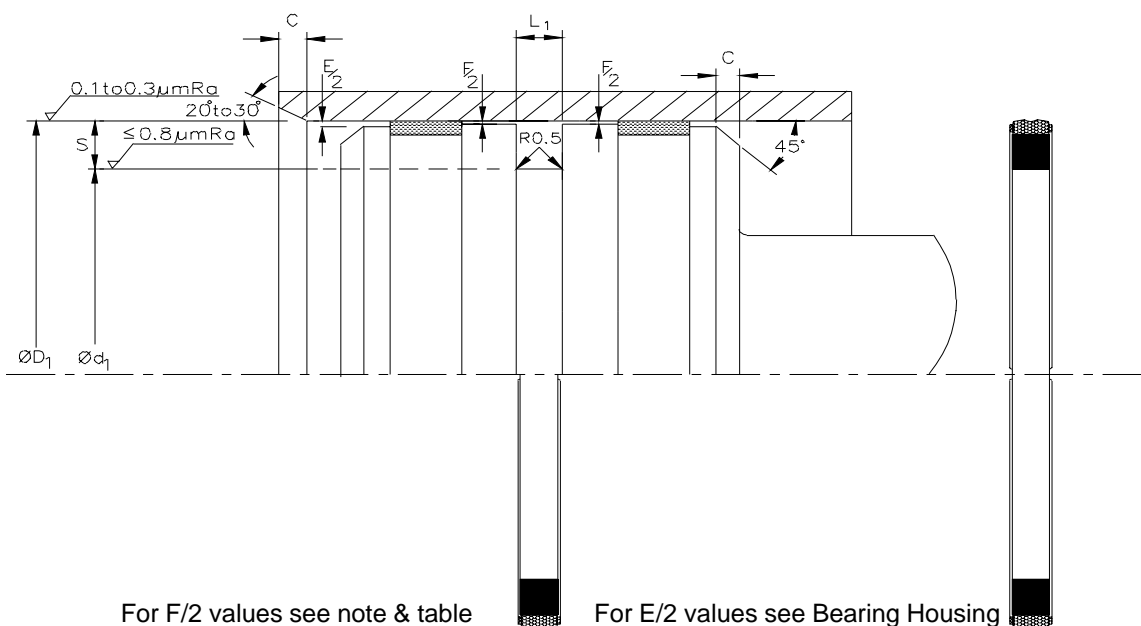

CS 8



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 ØD ₁ | h9 Ød ₁ | +0.20 -0.00 L ₁ | Nominal S | Nominal C |
|-----------------------|-----------------------|-----------------------|----------------------------------|--------------|--------------|
| CS 80200 | 20 | 12.5 | 3.2 | 3.75 | 2.0 |
| CS 80250 | 25 | 17.5 | 3.2 | 3.75 | 2.0 |
| CS 80300 | 30 | 22.5 | 3.2 | 3.75 | 2.0 |
| CS 80320 | 32 | 24.5 | 3.2 | 3.75 | 2.0 |
| CS 80400 | 40 | 29.0 | 4.2 | 5.50 | 3.0 |
| CS 80400/2 | 40 | 24.5 | 6.3 | 7.75 | 4.0 |
| CS 80450 | 45 | 34.0 | 4.2 | 5.50 | 3.0 |
| CS 80500 | 50 | 39.0 | 4.2 | 5.50 | 3.0 |
| CS 80500/2 | 50 | 34.5 | 6.3 | 7.75 | 4.0 |
| CS 80550/2 | 55 | 39.5 | 6.3 | 7.75 | 4.0 |
| CS 80600 | 60 | 49.0 | 4.2 | 5.50 | 3.0 |
| CS 80600/2 | 60 | 44.5 | 6.3 | 7.75 | 4.0 |
| CS 80630 | 63 | 52.0 | 4.2 | 5.50 | 3.0 |
| CS 80630/2 | 63 | 47.5 | 6.3 | 7.75 | 4.0 |
| CS 80650/2 | 65 | 49.5 | 6.3 | 7.75 | 4.0 |
| CS 80650/4 | 65 | 52.0 | 6.3 | 6.50 | 3.0 |
| CS 80700 | 70 | 59.0 | 4.2 | 5.50 | 3.0 |
| CS 80700/2 | 70 | 54.5 | 6.3 | 7.75 | 4.0 |
| CS 80700/4 | 70 | 57.0 | 6.3 | 6.50 | 3.0 |
| CS 80750/2 | 75 | 59.5 | 6.3 | 7.75 | 4.0 |
| CS 80750/4 | 75 | 62.0 | 6.3 | 6.50 | 3.0 |
| CS 80800 | 80 | 64.5 | 6.3 | 7.75 | 4.0 |
| CS 80900 | 90 | 74.5 | 6.3 | 7.75 | 4.0 |
| CS 81000 | 100 | 84.5 | 6.3 | 7.75 | 4.0 |
| CS 81000/2 | 100 | 79.0 | 8.1 | 10.50 | 5.0 |
| CS 81000/4 | 100 | 86.5 | 6.3 | 6.75 | 4.0 |
| CS 81100/2 | 110 | 89.0 | 8.1 | 10.50 | 5.0 |
| CS 81200/2 | 120 | 99.0 | 8.1 | 10.50 | 5.0 |
| CS 81250/2 | 125 | 104.0 | 8.1 | 10.50 | 5.0 |
| CS 81300/2 | 130 | 109.0 | 8.1 | 10.50 | 5.0 |
| CS 81400 | 140 | 119.0 | 8.1 | 10.50 | 5.0 |
| CS 81500 | 150 | 129.0 | 8.1 | 10.50 | 5.0 |
| CS 81600 | 160 | 139.0 | 8.1 | 10.50 | 5.0 |
| CS 81800 | 180 | 159.0 | 8.1 | 10.50 | 5.0 |
| CS 82000 | 200 | 179.0 | 8.1 | 10.50 | 5.0 |

CSPGI



Design

Designed for use on one piece pistons. The seal consists of a precision moulded high performance 98°Shore Polyurethane outer sleeve, pre loaded and pressure energised by a square section NBR 80°Shore rubber element. The compact design allows smaller width pistons to be used. The seal offers excellent wear resistance on a wide range of surface finishes. Sizes conform to standard Japanese housings.

Operating Conditions


| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -30°C to 80°C | -30°C to 100°C |
| 1.0 | 280 Bar | 250 Bar |
| 0.5 | 450 Bar | 400 Bar |

Continuous operating temperature for various fluids

| Polyurethane / Nitrile Composite | | |
|----------------------------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | NS |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

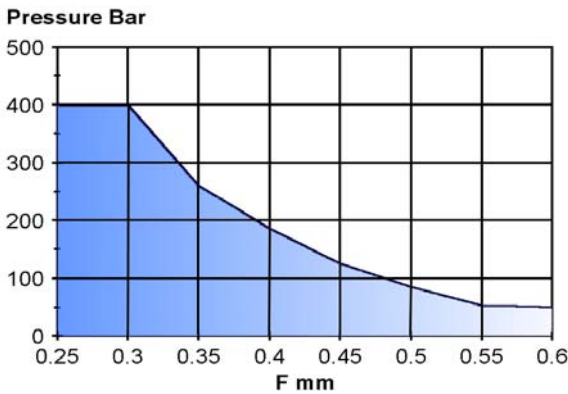


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C
The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

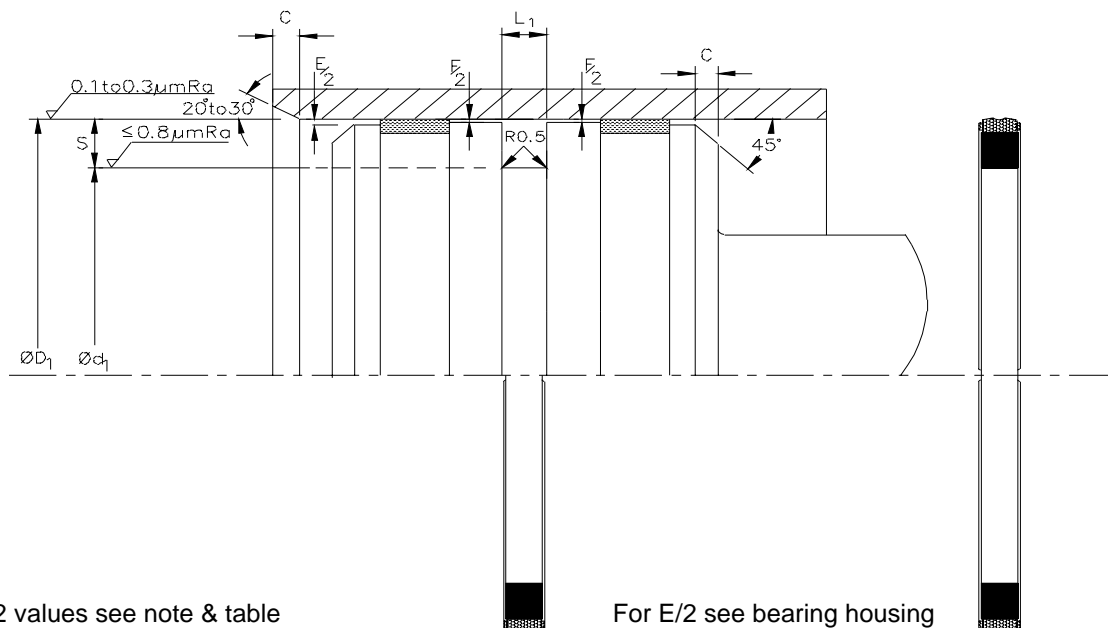

For F/2 values see note & table


For E/2 see bearing housing

CSPGI



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 ØD ₁ | h9 Ød ₁ | ^{+0.20} -0.00 L ₁ | Nominal S | Nominal C |
|--------------------|-----------------------|-----------------------|---|--------------|--------------|
| CSPGI 030 | 30.0 | 20.5 | 4.5 | 4.75 | 2.0 |
| CSPGI 031.5 | 31.5 | 22.0 | 4.5 | 4.75 | 3.5 |
| CSPGI 032 | 32.0 | 22.5 | 4.5 | 4.75 | 3.5 |
| CSPGI 040 | 40.0 | 30.0 | 4.5 | 5.0 | 3.5 |
| CSPGI 050 | 50.0 | 40.0 | 4.5 | 5.0 | 4.0 |
| CSPGI 060 | 60.0 | 50.0 | 4.5 | 5.0 | 4.0 |
| CSPGI 063 | 63.0 | 48.0 | 7.5 | 7.5 | 4.0 |
| CSPGI 065 | 65.0 | 50.0 | 7.5 | 7.5 | 4.0 |
| CSPGI 070 | 70.0 | 55.0 | 7.5 | 7.5 | 4.0 |
| CSPGI 075 | 75.0 | 60.0 | 7.5 | 7.5 | 4.0 |
| CSPGI 080 | 80.0 | 65.0 | 7.5 | 7.5 | 5.0 |
| CSPGI 090 | 90.0 | 75.0 | 7.5 | 7.5 | 5.0 |
| CSPGI 100 | 100.0 | 85.0 | 7.5 | 7.5 | 5.0 |
| CSPGI 125 | 125.0 | 109.0 | 7.5 | 8.0 | 6.5 |
| CSPGI 140 | 140.0 | 124.0 | 7.5 | 8.0 | 6.5 |
| CSPGI 160 | 160.0 | 144.0 | 7.5 | 8.0 | 6.5 |
| CSPGI 180 | 180.0 | 158.0 | 11.0 | 11.0 | 6.5 |
| CSPGI 200 | 200.0 | 178.0 | 11.0 | 11.0 | 6.5 |
| CSPGI 220 | 220.0 | 198.0 | 11.0 | 11.0 | 6.5 |
| CSPGI 224 | 224.0 | 202.0 | 11.0 | 11.0 | 6.5 |
| CSPGI 250 | 250.0 | 228.0 | 11.0 | 11.0 | 6.5 |




CS5

841

CS5

841



Design

Claron Composite Seals Style CS5 and Style 841 are designed as high pressure, low friction Double-acting piston seals for use in heavy duty hydraulic and pneumatic cylinders.

Claron Composite Seals Style 841 is specifically designed for minimum leakage and slow rotary applications using the same housing designs as Style CS5

The inclusion of radial grooves on the P.T.F.E. element, from 20mm diameter onwards, allows rapid response to bi-directional pressure changes.

Materials

Standard materials are Bronze filled P.T.F.E with a Nitrile O-Ring Energiser but both the outer sealing element and the energiser are available in a wide range of high performance materials to suit a variety of applications . The application parameters should be carefully considered prior to selecting suitable materials from the tables in Appendix 2. Consult Claron for further advice.

Operating Range

Temp -54°C to 200°C Dependent upon O-Ring Material used

Pressure upto 800 bar

Velocity upto 15m/s

These range parameters are maximum conditional values

Optimum service conditions are affected by temperature, speed pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Operating Conditions

Maximum Working Pressure for “Standard” seal applications using specified tolerances.

Temp. range

-30°C to 80°C

400bar

Temp. range


80°C to 120°C

350 bar

Diametrical Clearance F shown in the graph to the right is calculated as the maximum permissible extrusion gap, allowing for movement due to side load, for various pressures and temperatures upto 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the **Radial clearance** to a value nearer to F/2 thus increasing the pressure capability of the seal.

The maximum seal extrusion gap should be calculated allowing for all tolerances, movement and cylinder expansion.


For pressures > 400 bar, the seal extrusion gap should be reduced by utilising smaller tolerances. e.g H8 for Cylinder bore, f8 for piston diameter.

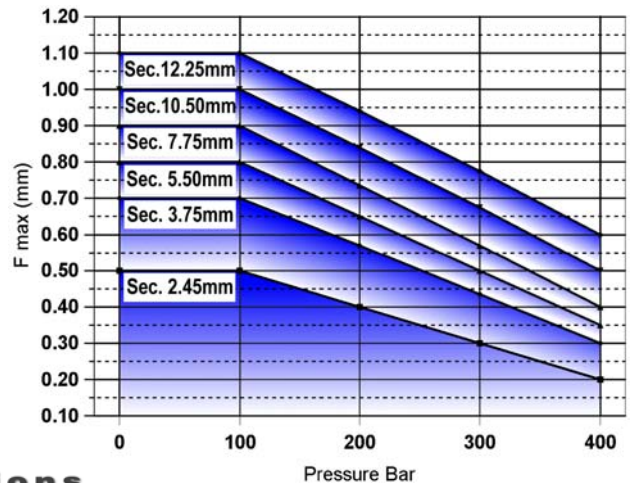

Range Of Installation Dimensions

The full range of diameters applicable to the “Standard”, “Light” and “Heavy” Duty Sections are shown in the table below

| Housing | | Cylinder Bore | | |
|---------|-------|---------------|--------------|--------------|
| Section | Width | Standard | Light (/1) | Heavy (/2) |
| 2.50 | 2.20 | 8 to 14.9 | 15 to 39.9 | |
| 3.75 | 3.20 | 15 to 39.9 | 40 to 79.9 | |
| 5.50 | 4.20 | 40 to 79.9 | 80 to 132.9 | 15 to 39.9 |
| 7.75 | 6.30 | 80 to 132.9 | 133 to 329.9 | 40 to 79.9 |
| 10.50 | 8.10 | 133 to 329.9 | 330 to 580 | 80 to 132.9 |
| 12.25 | 8.10 | 330 to 580 | | 133 to 329.9 |
| 14.00 | 9.50 | | | 330 to 580 |




CS5

841

CS5

841



How To Order


When ordering, prefix the size reference with the style required and use the suffix shown in the material application tables Appendix 2.

- e.g. CS5 Standard section in Bronze filled material for 70mm diameter **CS50700/B**
- CS5 Light duty section in Glass filled material for 70 mm diameter **CS50700/1G**
- 841 Heavy duty section in Carbon filled material for 70 mm diameter **841-0700/2C**

For O-Ring energiser materials other than Nitrile, use suffix shown in material table, Appendix 2.
e.g. Fluorocarbon material (FKM), **CS50700/B/FKM**

Housing

For surface finish and lead in chamfers refer to the illustration below. For Housing dimensions and tolerances refer to the table of recommended sizes, and Appendix 4 for value of tolerance symbols.

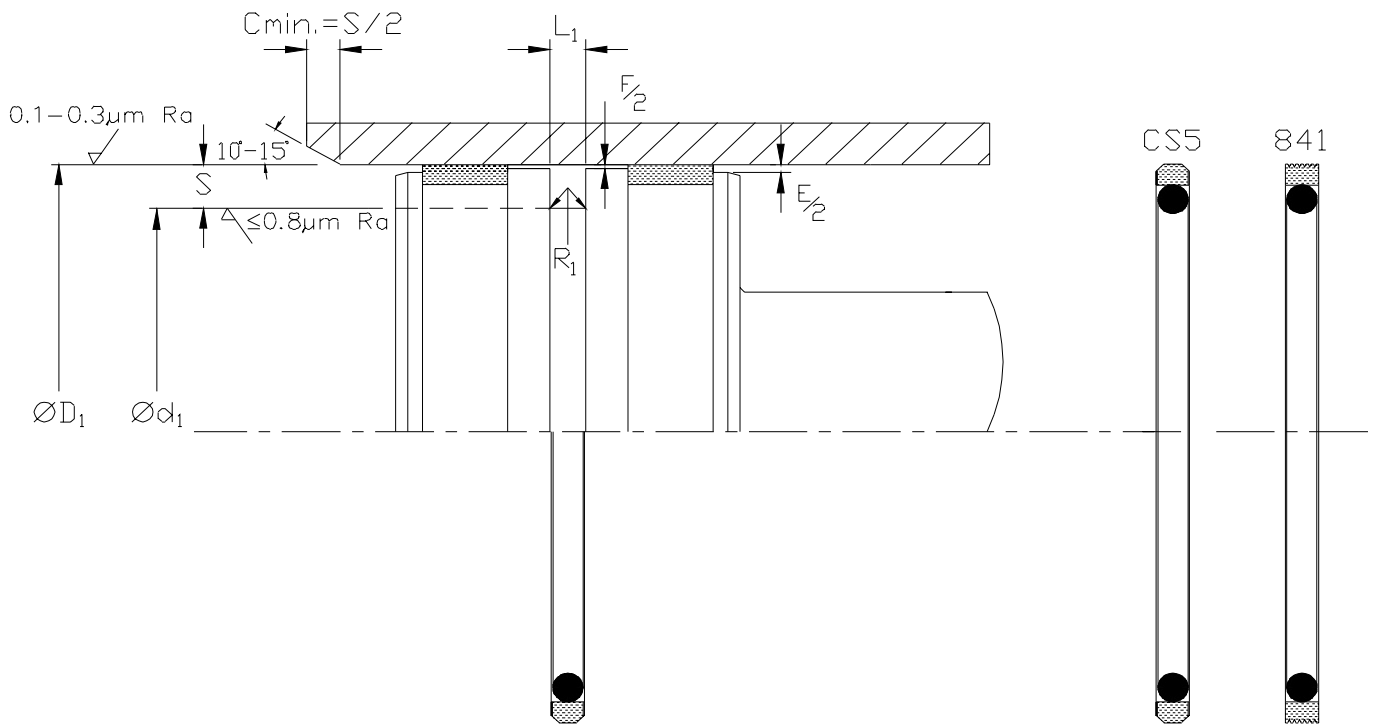


For F/2 values see note & tables

For E/2 refer to Guide Tape page

Fitting


For the seal to function correctly it is important that care is taken during fitting. For details refer to Appendix 3



CS5

Double Acting Piston Seal

Metric



841

CS5

841

Nominal Dimensions & Machining Tolerances

Nominal Dimensions & Machining Tolerances

| Claron | ØD ₁ H9 | Ød ₁ h9 | L ₁ +0.2 -0.0 | S Nom Sec | R ₁ MAX | F/2 MAX |
|-------------------|-----------------------|-----------------------|--------------------------------|-----------------|-----------------------|------------|
| CS50100/B | 10.00 | 5.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS50120/B | 12.00 | 7.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS50140/B | 14.00 | 9.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS50150/B | 15.00 | 7.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50160/1B | 16.00 | 11.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS50160/B | 16.00 | 8.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50180/B | 18.00 | 10.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50200/1B | 20.00 | 15.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS50200/B | 20.00 | 12.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50220/B | 22.00 | 14.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50250/B | 25.00 | 17.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50250/2B | 25.00 | 14.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50254/B | 25.40 | 17.90 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50280/B | 28.00 | 20.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50300/B | 30.00 | 22.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50320/2B | 32.00 | 21.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50320/B | 32.00 | 24.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50350/B | 35.00 | 27.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50360/B | 36.00 | 28.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50381/B | 38.10 | 30.60 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50400/1B | 40.00 | 32.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50400/B | 40.00 | 29.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50420/B | 42.00 | 31.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50450/B | 45.00 | 34.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50480/B | 48.00 | 37.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50500/1B | 50.00 | 42.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50500/2B | 50.00 | 34.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS50500/B | 50.00 | 39.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50508/B | 50.80 | 39.80 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50520/B | 52.00 | 41.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50550/B | 55.00 | 44.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50600/B | 60.00 | 49.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50630/1B | 63.00 | 55.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS50630/2B | 63.00 | 47.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS50630/B | 63.00 | 52.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50635/B | 63.50 | 52.50 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50650/B | 65.00 | 54.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50700/2B | 70.00 | 54.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS50700/B | 70.00 | 59.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50750/B | 75.00 | 64.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50800/1B | 80.00 | 69.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS50800/2B | 80.00 | 59.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS50800/B | 80.00 | 64.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS50850/2B | 85.00 | 64.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS50850/B | 85.00 | 69.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS50900/2B | 90.00 | 69.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS50900/B | 90.00 | 74.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS50950/2B | 95.00 | 74.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS50950/B | 95.00 | 79.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51000/1B | 100.00 | 89.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS51000/2B | 100.00 | 79.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51000/B | 100.00 | 84.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51016/B | 101.60 | 86.10 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51050/2B | 105.00 | 84.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51050/B | 105.00 | 89.50 | 6.30 | 7.75 | 1.20 | 0.40 |

| Claron | ØD ₁ H9 | Ød ₁ h9 | L ₁ +0.2 -0.0 | S Nom Sec | R ₁ MAX | F/2 MAX |
|-------------------|-----------------------|-----------------------|--------------------------------|-----------------|-----------------------|------------|
| CS51100/2B | 110.00 | 89.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51100/B | 110.00 | 94.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51143/B | 114.30 | 98.80 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51150/2B | 115.00 | 94.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51150/B | 115.00 | 99.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51200/2B | 120.00 | 99.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51200/B | 120.00 | 104.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51250/2B | 125.00 | 104.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51250/B | 125.00 | 109.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51270/B | 127.00 | 111.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51300/2B | 130.00 | 109.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51300/B | 130.00 | 114.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51350/B | 135.00 | 114.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51400/B | 140.00 | 119.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51500/B | 150.00 | 129.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51524/B | 152.40 | 131.40 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51600/1B | 160.00 | 144.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS51600/2B | 160.00 | 135.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS51600/B | 160.00 | 139.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51700/B | 170.00 | 149.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51800/B | 180.00 | 159.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS51900/B | 190.00 | 169.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52000/1B | 200.00 | 184.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS52000/2B | 200.00 | 175.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS52000/B | 200.00 | 179.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52100/B | 210.00 | 189.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52200/B | 220.00 | 199.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52250/B | 225.00 | 204.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52300/B | 230.00 | 209.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52400/B | 240.00 | 219.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52500/2B | 250.00 | 225.50 | 8.10 | 12.25 | 1.50 | 0.50 |
| CS52500/B | 250.00 | 229.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52600/B | 260.00 | 239.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS52800/B | 280.00 | 259.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS53000/B | 300.00 | 279.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS53200/2B | 320.00 | 295.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS53200/B | 320.00 | 299.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS53500/B | 350.00 | 325.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS53600/B | 360.00 | 335.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS53800/B | 380.00 | 355.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS54000/B | 400.00 | 375.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS54200/B | 420.00 | 395.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS54500/B | 450.00 | 425.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS54800/B | 480.00 | 455.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS55000/B | 500.00 | 475.50 | 8.10 | 12.25 | 1.50 | 0.60 |

Dimensions in bold type conform to ISO 7425-1 :1988

Intermediate sizes upto 580mm are available, incl. Imperial


Double Acting Piston Seal.



CS 2 Imperial

CS 4 Metric

CS2 CS4



Design

Claron composite seals styles CS2 and CS 4 are designed for use in light duty hydraulic or pneumatic piston applications. Style CS2 covers the range of imperial sizes, and CS4 the metric sizes.

Materials

Claron composite seals style CS2 and CS4 as standard comprise of a Virgin PTFE outer sleeve and are energised by a 75° shore hardness Nitrile rubber O-Ring. A full range of materials are available to suit a variety of applications.

See tables in Appendix 2.

Operating Conditions

Maximum Working Pressure for "Standard" seal applications using specified tolerances.

Temp Range: -40°C to +120°C (Dependent upon energiser material. See Appendix 2)

Max. Pressure: 350 Bar

Max. Linear Speed: 15m/s


These range parameters are maximum conditional values

Optimum service conditions are affected by temperature, speed pressure, surface finish and extrusion gaps..

Refer to Appendix 1 section for further information.

Diametral Clearance 'F'

'F' shown in the size tables is based upon Virgin P.T.F.E., temperatures up to 80°C and 350 Bar pressure in designs where PTFE guide tape is utilised. For other pressures, refer to the graph shown below.

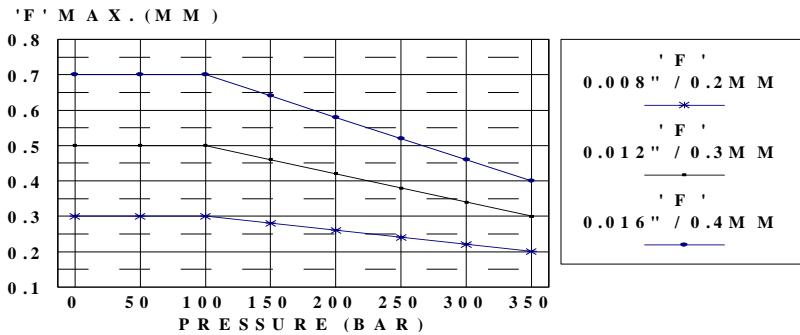


To use this graph, refer to the tables on for the max. value of 'F' at 350 Bar then apply the relevant curve for the various pressures.

The maximum extrusion gap 'F/2' should be calculated allowing for all movements due to tolerances, side-loads and cylinder expansion.

How To Order

When ordering, quote the size reference shown on the dimensions table.

If an energiser material other than the standard nitrile type is required, consult Claron for the part number to be used.

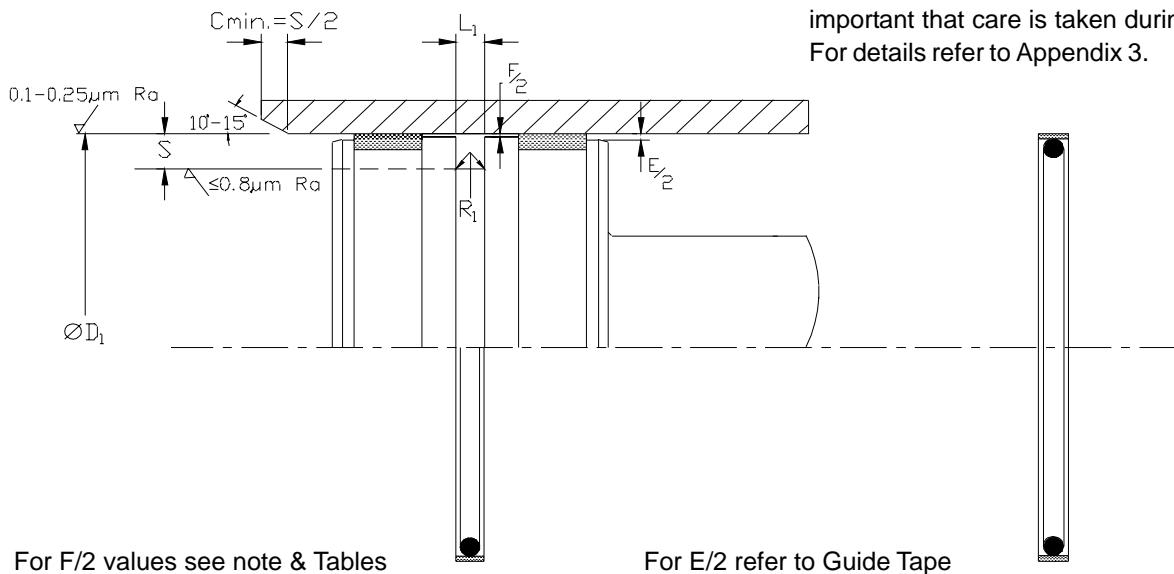

For the seal to function correctly it is important that care is taken during fitting. For details refer to Appendix 3.

For F/2 values see note & Tables

For E/2 refer to Guide Tape

Double Acting Piston Seal.

CS 2 Imperial Sizes

CS 4 Metric Sizes

Nominal Dimensions & Machining Tolerances

Nominal Dimensions & Machining Tolerances

| Claron Part No. | H9 ØD ₁ | L ₁ ±0.003 | S | Tol. On. S | R ₁ Max | F Max (350 Bar) | Claron Part No. | H9 ØD ₁ | L ₁ ±0.075 | S | Tol. On. S | R ₁ Max | F Max (350 Bar) |
|-----------------|--------------------|-----------------------|-------|------------------|--------------------|-----------------|-----------------|--------------------|-----------------------|------|-----------------|--------------------|-----------------|
| CS 20031 | 0.312 | | | | | | CS 4008 | 8 | | | | | |
| CS 20034 | 0.343 | | | | | | CS 4009 | 9 | | | | | |
| CS 20037 | 0.375 | 0.094 | 0.080 | +0.002 -0.000 | 0.010 | 0.008 | CS 4010 | 10 | | | | | |
| CS 20043 | 0.437 | | | | | | CS 4011 | 11 | | | | | |
| CS 20050 | 0.500 | | | | | | CS 4012 | 12 | 2.40 | 2.15 | +0.05 -0.00 | 0.25 | 0.20 |
| CS 20056 | 0.562 | | | | | | CS 4013 | 13 | | | | | |
| | | | | | | | CS 4014 | 14 | | | | | |
| | | | | | | | CS 4015 | 15 | | | | | |
| CS 20062 | 0.625 | | | | | | CS 4016 | 16 | | | | | |
| CS 20068 | 0.687 | | | | | | CS 4017 | 17 | | | | | |
| CS 20075 | 0.750 | 0.141 | 0.111 | +0.003 -0.000 | 0.020 | 0.008 | CS 4018 | 18 | | | | | |
| CS 20081 | 0.812 | | | | | | CS 4020 | 20 | 3.60 | 3.00 | +0.075 -0.00 | 0.50 | 0.20 |
| CS 20087 | 0.875 | | | | | | CS 4022 | 22 | | | | | |
| CS 20093 | 0.937 | | | | | | CS 4023 | 23 | | | | | |
| CS 20100 | 1.000 | | | | | | CS 4024 | 24 | | | | | |
| | | | | | | | CS 4025 | 25 | | | | | |
| CS 20106 | 1.062 | | | | | | CS 4026 | 26 | | | | | |
| CS 20112 | 1.125 | | | | | | CS 4027 | 27 | | | | | |
| CS 20118 | 1.187 | | | | | | CS 4028 | 28 | | | | | |
| CS 20125 | 1.250 | | | | | | CS 4029 | 29 | | | | | |
| CS 20131 | 1.312 | | | | | | CS 4030 | 30 | | | | | |
| CS 20137 | 1.375 | 0.188 | 0.152 | +0.004 -0.000 | 0.030 | 0.008 | CS 4031 | 31 | | | | | |
| CS 20143 | 1.437 | | | | | | CS 4032 | 32 | | | | | |
| CS 20150 | 1.500 | | | | | | CS 4033 | 33 | | | | | |
| CS 20156 | 1.562 | | | | | | CS 4034 | 34 | | | | | |
| CS 20162 | 1.625 | | | | | | CS 4035 | 35 | | | | | |
| CS 20168 | 1.687 | | | | | | CS 4036 | 36 | | | | | |
| CS 20175 | 1.750 | | | | | | CS 4037 | 37 | 4.80 | 4.00 | +0.10 -0.00 | 0.75 | 0.20 |
| CS 20187 | 1.875 | | | | | | CS 4038 | 38 | | | | | |
| | | | | | | | CS 4039 | 39 | | | | | |
| CS 20200 | 2.000 | | | | | | CS 4040 | 40 | | | | | |
| CS 20212 | 2.125 | | | | | | CS 4041 | 41 | | | | | |
| CS 20225 | 2.250 | | | | | | CS 4042 | 42 | | | | | |
| CS 20237 | 2.375 | | | | | | CS 4043 | 43 | | | | | |
| CS 20250 | 2.500 | | | | | | CS 4044 | 44 | | | | | |
| CS 20262 | 2.625 | | | | | | CS 4045 | 45 | | | | | |
| CS 20275 | 2.750 | | | | | | CS 4047 | 47 | | | | | |
| CS 20287 | 2.875 | | | | | | CS 4048 | 48 | | | | | |
| CS 20300 | 3.000 | | | | | | CS 4049 | 49 | | | | | |
| CS 20312 | 3.125 | | | | | | | | | | | | |
| CS 20325 | 3.250 | | | | | | CS 4050 | 50 | | | | | |
| CS 20337 | 3.375 | | | | | | CS 4053 | 53 | | | | | |
| CS 20350 | 3.500 | 0.281 | 0.244 | +0.004 -0.000 | 0.040 | 0.012 | CS 4055 | 55 | | | | | |
| CS 20362 | 3.625 | | | | | | CS 4056 | 56 | | | | | |
| CS 20375 | 3.750 | | | | | | CS 4058 | 58 | | | | | |
| CS 20387 | 3.875 | | | | | | CS 4060 | 60 | | | | | |
| CS 20400 | 4.000 | | | | | | CS 4063 | 63 | | | | | |
| CS 20412 | 4.125 | | | | | | CS 4065 | 65 | | | | | |
| CS 20425 | 4.250 | | | | | | CS 4070 | 70 | | | | | |
| CS 20437 | 4.375 | | | | | | CS 4073 | 73 | | | | | |
| CS 20450 | 4.500 | | | | | | CS 4075 | 75 | 7.15 | 6.20 | +0.10 -0.0 | 1.00 | 0.30 |
| CS 20462 | 4.625 | | | | | | CS 4080 | 80 | | | | | |
| CS 20475 | 4.750 | | | | | | CS 4085 | 85 | | | | | |
| CS 20487 | 4.875 | | | | | | CS 4090 | 90 | | | | | |
| CS 20500 | 5.000 | | | | | | CS 4100 | 100 | | | | | |
| | | | | | | | CS 4105 | 105 | | | | | |
| CS 20512 | 5.125 | | | | | | CS 4110 | 110 | | | | | |
| CS 20525 | 5.250 | | | | | | CS 4115 | 115 | | | | | |
| CS 20537 | 5.375 | | | | | | CS 4120 | 120 | | | | | |
| CS 20550 | 5.500 | | | | | | CS 4125 | 125 | | | | | |
| CS 20562 | 5.625 | | | | | | | | | | | | |
| CS 20575 | 5.750 | | | | | | CS 4130 | 130 | | | | | |
| CS 20587 | 5.875 | | | | | | CS 4135 | 135 | | | | | |
| CS 20600 | 6.000 | | | | | | CS 4140 | 140 | | | | | |
| CS 20612 | 6.125 | | | | | | CS 4145 | 145 | | | | | |
| CS 20625 | 6.250 | | | | | | CS 4150 | 150 | | | | | |
| CS 20637 | 6.375 | 0.375 | 0.328 | +0.005 -0.000 | 0.040 | 0.016 | CS 4160 | 160 | | | | | |
| CS 20650 | 6.500 | | | | | | CS 4165 | 165 | 9.50 | 8.40 | +0.10 -0.00 | 1.00 | 0.40 |
| CS 20662 | 6.625 | | | | | | CS 4170 | 170 | | | | | |
| CS 20675 | 6.750 | | | | | | CS 4175 | 175 | | | | | |
| CS 20700 | 7.000 | | | | | | CS 4200 | 200 | | | | | |
| CS 20750 | 7.500 | | | | | | CS 4250 | 250 | | | | | |
| CS 20800 | 8.000 | | | | | | CS 4320 | 320 | | | | | |
| CS 20850 | 8.500 | | | | | | | | | | | | |
| CS 20900 | 9.000 | | | | | | | | | | | | |
| CS 20950 | 9.500 | | | | | | | | | | | | |
| CS 21000 | 10.000 | | | | | | | | | | | | |
| CS 21200 | 12.000 | | | | | | | | | | | | |

D-Ring



Design

Claron D-Ring Seals are designed as high pressure, low friction Double-acting piston seals for use in heavy duty hydraulic cylinders.

The seals high pressure resistance makes it suitable for use in heavy duty applications where shock loads and pressure spikes occur, as found in mobile plant equipment.

The inclusion of radial grooves on the P.T.F.E. element allows rapid response to bi-directional pressure changes.

Materials

Standard materials are Bronze Filled P.T.F.E. Outer Ring with a Nitrile O-Ring Energiser but both the outer sealing element and the energiser are available in a wide range of high performance materials to suit a variety of applications. The application parameters should be carefully considered prior to selecting suitable materials from the tables. Consult Claron for further advice.

Operating Range

Temp. -54°C to 200°C Dependent upon O-Ring Material used

Pressure upto 800 bar

Velocity upto 15m/s

These range parameters are maximum conditional values

Optimum service conditions are affected by temperature, speed pressure, surface finish and extrusion gaps.

Refer to Appendix 1 section for further information.

Operating Conditions

Maximum Working Pressure for "Standard" seal applications using specified tolerances.

Temp. range
-30°C to 80°C
400bar


Temp. range
80°C to 120°C
350 bar

Diametral Clearance F shown in the graph to the right is calculated as the maximum permissible extrusion gap, allowing for movement due to side load, for various pressures and temperatures up to 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the **Radial clearance** to a value nearer to F/2 thus increasing the pressure capability of the seal.

The maximum seal extrusion gap should be calculated allowing for all tolerances, movement and cylinder expansion.

For pressures > 400 bar, the seal extrusion gap should be reduced by utilising smaller tolerances.

e.g H8 for Cylinder bore, f8 for piston diameter and P.T.F.E tape seating diameter.

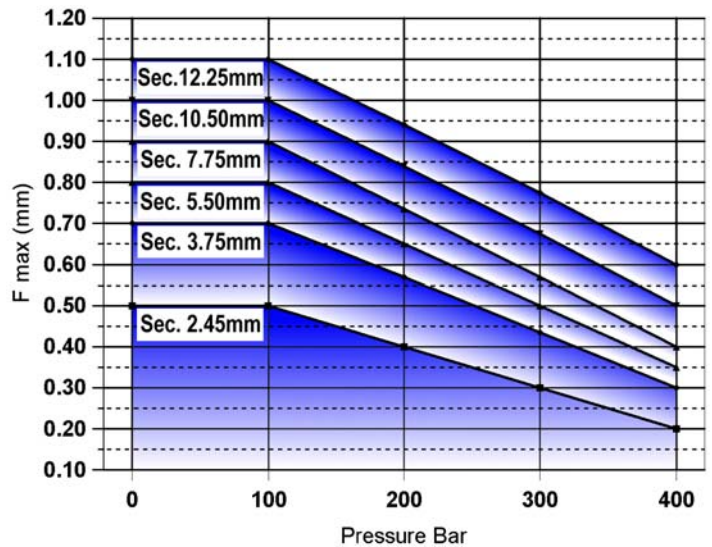

Range Of Installation Dimensions

The full range of diameters applicable to the "Standard and "Light" Duty Sections are shown in the table below

| Housing | | Cylinder Bore | |
|---------|-------|---------------|-------------|
| Section | Width | Standard | Light (/1) |
| 7.75 | 6.30 | | 70 to 132.9 |
| 10.50 | 8.10 | 95 to 320 | |



D-Ring




How To Order

When ordering, prefix the size reference with the style required and use the suffix shown in the material application tables.

- e.g. D-Ring Standard section in Bronze filled material for 70mm diameter **D0700/B**
- D-Ring Light duty section in Glass filled material for 70 mm diameter **D0700/1G**
- For O-Ring energiser materials other than Nitrile, use suffix shown in material table.
- e.g. Flourocarbon material (FKM), **D0700/B/FKM**

Housing

For surface finish and lead in chamfers refer to the illustration below. For Housing dimensions and tolerances refer to the table of recommended sizes, and Appendix 4 for value of tolerance symbols.

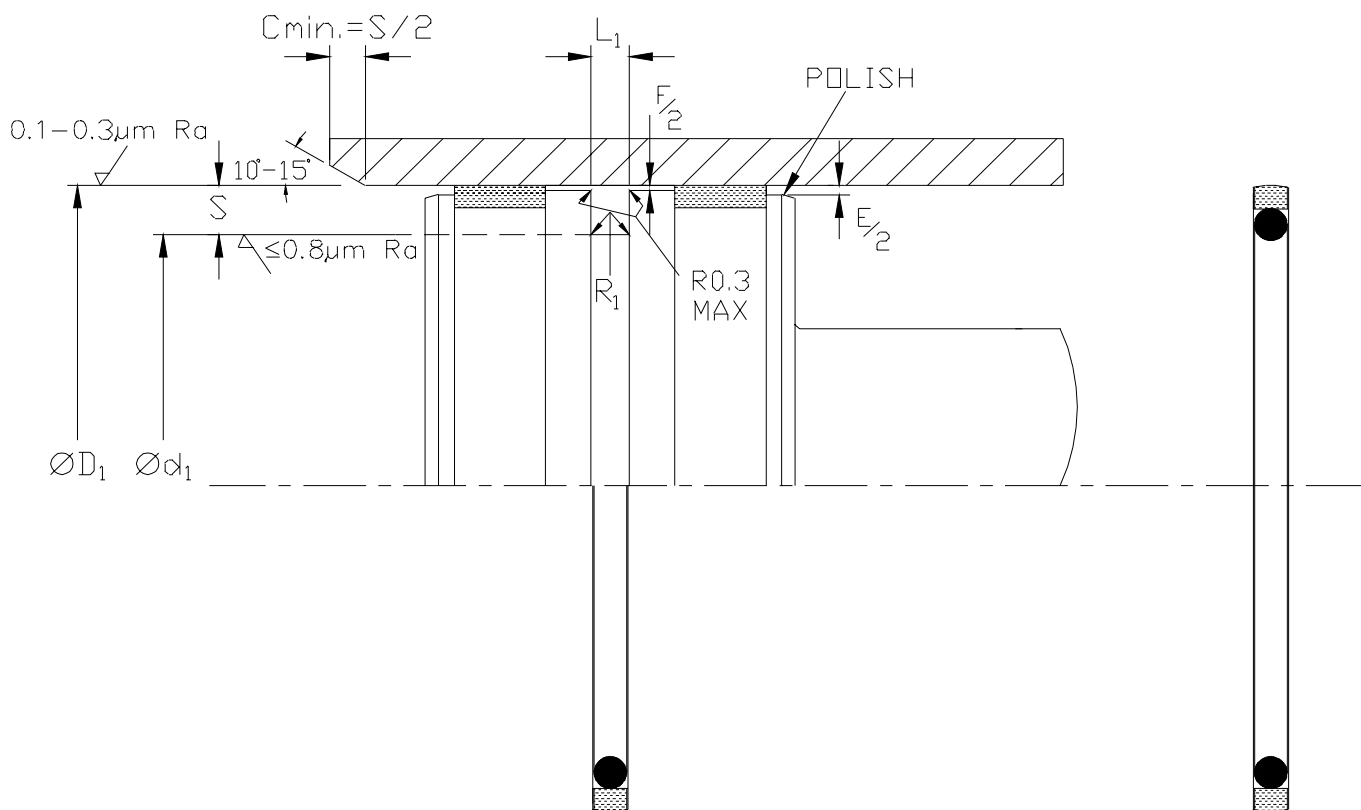

For F/2 values see note and tables

For E/2 values refer to P.T.F.E. Guide Tape

Fitting

For the seal to function correctly it is important that care is taken during fitting.
For details refer to Appendix 3.

Double Acting Piston Seal Metric

D-Ring




Nominal Dimensions & Machining Tolerances

Nominal Dimensions & Machining Tolerances

| Claron Part No. | H9 ØD ₁ | h9 Ød ₁ | L ₁ +0.2 -0.0 | S Nom Sec | R ₁ Max | F/2 Max |
|-----------------|-----------------------|-----------------------|--------------------------------|-----------------|-----------------------|-------------|
| D0700/1B | 70.00 | 54.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D0750/1B | 75.00 | 59.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D0800/1B | 80.00 | 64.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D0850/1B | 85.00 | 69.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D0900/1B | 90.00 | 74.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D0950/1B | 95.00 | 79.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D1000/1B | 100.00 | 84.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D1050/1B | 105.00 | 89.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D1100/1B | 110.00 | 94.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D1150/1B | 115.00 | 99.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D1200/1B | 120.00 | 104.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D1250/1B | 125.00 | 109.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D1300/1B | 130.00 | 114.50 | 6.30 | 7.75 | 0.90 | 0.40 |
| D0950/B | 95.00 | 74.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1000/B | 100.00 | 79.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1050/B | 105.00 | 84.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1100/B | 110.00 | 89.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1150/B | 115.00 | 94.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1200/B | 120.00 | 99.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1250/B | 125.00 | 104.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1300/B | 130.00 | 109.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1350/B | 135.00 | 114.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1400/B | 140.00 | 119.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1450/B | 145.00 | 124.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1500/B | 150.00 | 129.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1550/B | 155.00 | 134.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1600/B | 160.00 | 139.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1650/B | 165.00 | 144.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1700/B | 170.00 | 149.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1800/B | 180.00 | 159.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D1900/B | 190.00 | 169.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D2000/B | 200.00 | 179.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D2100/B | 210.00 | 189.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D2200/B | 220.00 | 199.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D2300/B | 230.00 | 209.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D2400/B | 240.00 | 219.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D2500/B | 250.00 | 229.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D2600/B | 260.00 | 239.00 | 8.10 | 10.50 | 0.90 | 0.60 |


| Claron Part No. | H9 ØD ₁ | h9 Ød ₁ | L ₁ +0.2 -0.0 | S Nom Sec | R ₁ Max | F/2 Max |
|-----------------|-----------------------|-----------------------|--------------------------------|-----------------|-----------------------|------------|
| D2700/B | 270.00 | 249.00 | 8.10 | 10.50 | 0.90 | 0.60 |
| D2800/B | 280.00 | 259.00 | 8.10 | 10.50 | 0.90 | 0.60 |
| D2900/B | 290.00 | 269.00 | 8.10 | 10.50 | 0.90 | 0.50 |
| D3000/B | 300.00 | 279.00 | 8.10 | 10.50 | 0.90 | 0.60 |
| D3200/B | 320.00 | 299.00 | 8.10 | 10.50 | 0.90 | 0.60 |

DIMENSIONS IN BOLD TYPE CONFORM TO ISO 7425-1 :1988



Claron Polyseal

Double Acting Rotary Piston Seals RPS Style



Design

Claron RPS Style Piston Seals are designed for slow rotating and spiralling movements in high pressure / heavy duty applications. Where space allows, the design incorporates grooves in the sealing face to reduce surface contact, increase radial load and retain lubrication.

Materials

Standard materials are CF(Carbon Fibre) and CD(Carbon Graphite) with a Nitrile O-Ring energiser but both the sealing element and the energiser are available in a wide range of high performance materials, including VM (modified Virgin P.T.F.E.) and B (Bronze filled P.T.F.E.) to suit a variety of applications. The application parameters should be carefully considered prior to selection of suitable materials from the tables in Appendix 2. Consult Claron for further advice.

Operating Range

Temperature -54°C to +180°C dependant upon media and O-Ring material.


Pressure upto 300bar

Velocity upto 2m/sec

These range parameters are maximum conditional values. Optimum services conditions are affected by sealing media, working surface and extrusion gaps. Refer to Appendix 1 for further information.

Diametrical Clearance F shown in the graph to the right is calculated as the maximum permissible extrusion gap allowing for movement due to side load, for various pressures and temperatures upto 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the Radial clearance to a value nearer to F/2 thus increasing the pressure capability of the seal. The maximum seal extrusion gap should be calculated allowing for all tolerances, movement and cylinder expansion.

For pressures >300bar, the seal extrusion gap should be reduced by utilising smaller tolerances. e.g H8 for cylinder bore, f8 for piston diameter.

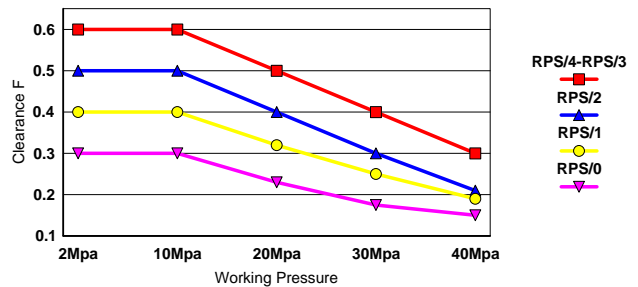

| Series Ref | Standard Range | Extended Range | d1 h9 Groove Dia | L1 +0.2 Groove Width | R1 Rad Max | C' Chfr Min | No Grooves In Sleeve | Min Dia for Closed Grooves | |
|------------|----------------|----------------|------------------|----------------------|------------|-------------|----------------------|----------------------------|-----|
| | | | | | | | | CF | CD |
| RPS/0 | 8-39.9 | 8 - 135 | D1 - 4.9 | 2.20 | 0.3 | 2.0 | 0 | 15 | 25 |
| RPS/1 | 40-79.9 | 14 - 250 | D1 - 7.5 | 3.20 | 0.5 | 2.5 | 1 | 25 | 38 |
| RPS/2 | 80-132.9 | 22 - 460 | D1 - 11.0 | 4.20 | 0.8 | 3.5 | 1 | 32 | 50 |
| RPS/3 | 133-329.9 | 40 - 500 | D1 - 15.5 | 6.30 | 1.2 | 5.0 | 2 | 50 | 75 |
| RPS/4 | 330-500 | 133 - 500 | D1 - 21.0 | 8.10 | 1.5 | 6.5 | 3 | 133 | 133 |

How To Order

95mm Bore Material Carbon Fibre P.T.F.E./ Nitrile O-Ring RPS/2/0950/CF

Light Duty 95mm Bore RPS/1/0950/CF (3.2 Width Groove)

Heavy Duty 95mm Bore RPS/3/0950/CF (6.3 width Groove)

eg. For sizes in the extended range use the series number applicable


For O-Ring Energiser materials other than Nitrile, use suffix shown in Material Table, Appendix 2


eg. Fluorocarbon Material (FKM) RPS/3/0950/CF/FKM

| Style | Series | 4Digit Size Code | PTFE Material Code |
|-------|--------|------------------|--------------------|
| RPS/ | 2/ | 0950/ | CF |
| RPS/ | 1/ | 0950/ | CF |
| RPS/ | 3/ | 0950/ | CF |

Housing

For housing dimensions, leading chamfers and tolerances refer to the table above and Appendix 4 for the value of tolerance symbols.

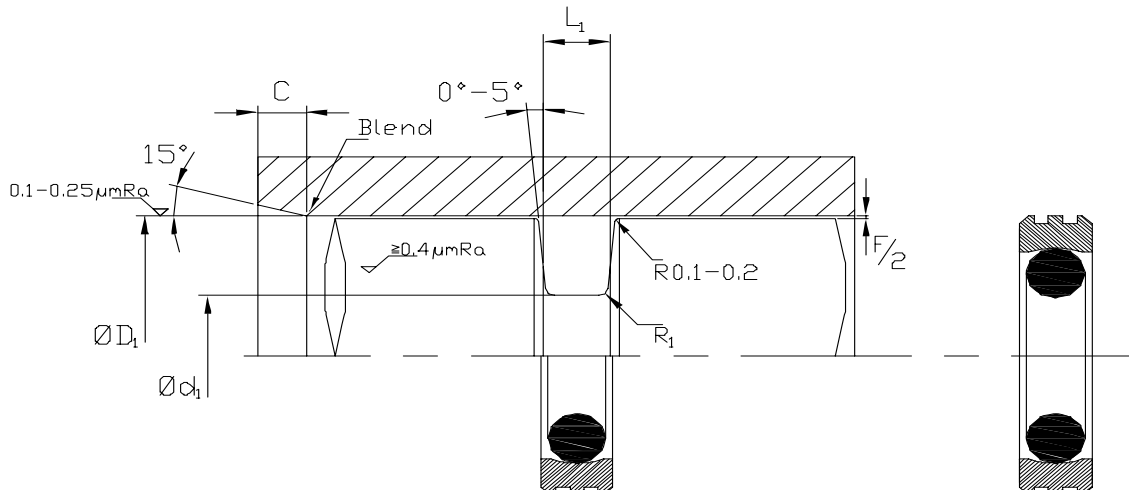




Claron Polyseal

Double Acting Rotary Piston Seals

RPS Style



Nominal Dimensions & Machining Tolerances

| Series Ref | Size Ref | ØD1 H9 | Ød1 h9 | L1 +0.2 / -0.0 | Series Ref | Size Ref | ØD1 H9 | Ød1 h9 | L1 +0.2 / -0.0 | |
|-------------|-------------|--------------|-------------|----------------|-------------|--|--------------|--------------|----------------|-----|
| RPS/0/ | 0080 | 8.0 | 3.1 | 2.2 | RPS/3/ | 1350 | 135.0 | 119.5 | 6.3 | |
| | 0100 | 10.0 | 5.1 | 2.2 | | 1400 | 140.0 | 124.5 | 6.3 | |
| | 0120 | 12.0 | 7.1 | 2.2 | | 1450 | 145.0 | 129.5 | 6.3 | |
| | 0140 | 14.0 | 9.1 | 2.2 | | 1500 | 150.0 | 134.5 | 6.3 | |
| | 0150 | 15.0 | 10.1 | 2.2 | | 1524 | 152.4 | 136.9 | 6.3 | |
| | 0160 | 16.0 | 11.1 | 2.2 | | 1600 | 160.0 | 144.5 | 6.3 | |
| | 0180 | 18.0 | 13.1 | 2.2 | | 1700 | 170.0 | 154.5 | 6.3 | |
| | 0200 | 20.0 | 15.1 | 2.2 | | 1778 | 177.8 | 162.3 | 6.3 | |
| | 0220 | 22.0 | 17.1 | 2.2 | | 1800 | 180.0 | 164.5 | 6.3 | |
| | 0250 | 25.0 | 20.1 | 2.2 | | 1900 | 190.0 | 174.5 | 6.3 | |
| | 0254 | 25.4 | 20.5 | 2.2 | | 2000 | 200.0 | 184.5 | 6.3 | |
| | 0280 | 28.0 | 23.1 | 2.2 | | 2032 | 203.2 | 187.7 | 6.3 | |
| | 0300 | 30.0 | 25.1 | 2.2 | | 2100 | 210.0 | 194.5 | 6.3 | |
| | 0320 | 32.0 | 27.1 | 2.2 | | 2200 | 220.0 | 204.5 | 6.3 | |
| | 0350 | 35.0 | 30.1 | 2.2 | | 2300 | 230.0 | 214.5 | 6.3 | |
| RPS/1/ | 0400 | 40.0 | 32.5 | 3.2 | 2400 | 240.0 | 224.5 | 6.3 | | |
| | 0450 | 45.0 | 37.5 | 3.2 | 2500 | 250.0 | 234.5 | 6.3 | | |
| | 0500 | 50.0 | 42.5 | 3.2 | 2540 | 254.0 | 238.5 | 6.3 | | |
| | 0508 | 50.8 | 43.3 | 3.2 | 2600 | 260.0 | 244.5 | 6.3 | | |
| | 0550 | 55.0 | 47.5 | 3.2 | 2800 | 280.0 | 264.5 | 6.3 | | |
| | 0600 | 60.0 | 52.5 | 3.2 | 3000 | 300.0 | 284.5 | 6.3 | | |
| | 0630 | 63.0 | 55.5 | 3.2 | 3048 | 304.8 | 289.3 | 6.3 | | |
| | 0650 | 65.0 | 57.5 | 3.2 | 3200 | 320.0 | 304.5 | 6.3 | | |
| | 0700 | 70.0 | 62.5 | 3.2 | RPS/4/ | 3300 | 330.0 | 309.0 | 8.1 | |
| | 0750 | 75.0 | 67.5 | 3.2 | | 3500 | 350.0 | 329.0 | 8.1 | |
| | 0762 | 76.2 | 68.7 | 3.2 | | 3600 | 360.0 | 339.0 | 8.1 | |
| | RPS/2/ | 0800 | 80.0 | 69.0 | | 4.2 | 3800 | 380.0 | 359.0 | 8.1 |
| | | 0850 | 85.0 | 74.0 | | 4.2 | 4000 | 400.0 | 379.0 | 8.1 |
| | | 0900 | 90.0 | 79.0 | | 4.2 | 4200 | 420.0 | 399.0 | 8.1 |
| | | 0950 | 95.0 | 84.0 | | 4.2 | 4500 | 450.0 | 429.0 | 8.1 |
| 1000 | | 100.0 | 89.0 | 4.2 | | 4800 | 480.0 | 459.0 | 8.1 | |
| 1016 | | 101.6 | 90.6 | 4.2 | | 5000 | 500.0 | 479.0 | 8.1 | |
| 1050 | | 105.0 | 94.0 | 4.2 | | All intermediate sizes, including imperial can be supplied within the extended range of sizes listed, see 'How To Order' | | | | |
| 1100 | | 110.0 | 99.0 | 4.2 | | | | | | |
| 1143 | | 114.3 | 103.3 | 4.2 | | | | | | |
| 1150 | | 115.0 | 104.0 | 4.2 | | | | | | |
| 1200 | | 120.0 | 109.0 | 4.2 | | | | | | |
| 1250 | | 125.0 | 114.0 | 4.2 | | | | | | |
| 1270 | | 127.0 | 116.0 | 4.2 | | | | | | |
| 1300 | | 130.0 | 119.0 | 4.2 | | | | | | |


The Bore diameters in BOLD conform to the requirements of ISO3320
Housing sizes in BOLD conform to the requirements of ISO7425-1

Fitting

For the seal to function correctly, it is important that care is taken during fitment, For a detailed checklist, refer to Appendix 3.

SECTION B

SINGLE ACTING PISTON SEALS

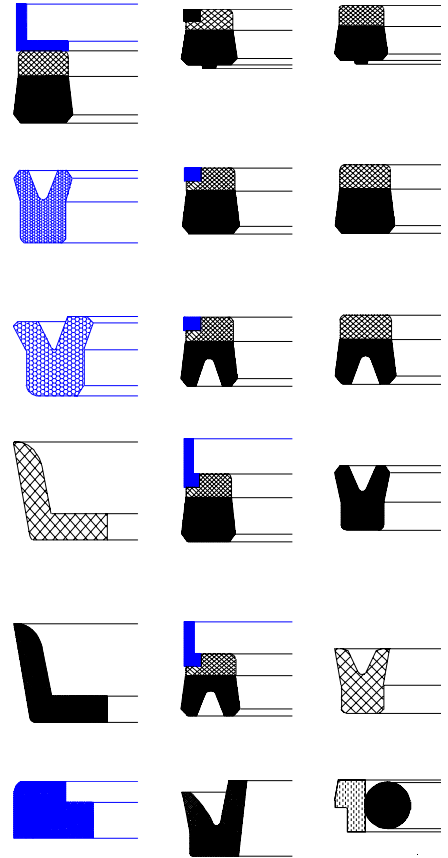

ClaronPolyseal® Single Acting Piston Seal

CP

Metric



Design


CLARON STYLE CP is designed with a symmetrical profile for use as a single acting piston or rod seal. The seal is a precision moulded Nitrile rubber sealing element with a bonded fabric reinforced base to resist extrusion. Designed with initial radial interference to effect low pressure sealing, at higher pressures the seal is energised thus increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, thus reducing friction and wear. Style CP is produced with radial grooves incorporated into the top of the seal on the pressure side. This innovative design ensures a rapid energisation of the seal without excessive end float and resultant wear.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

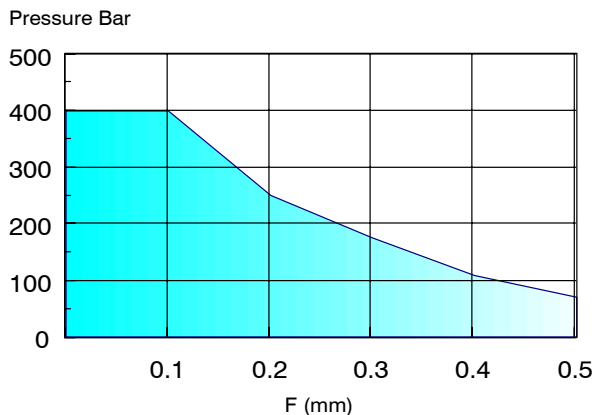

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.



Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols. For Rod applications see Section C.

Fitting



For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

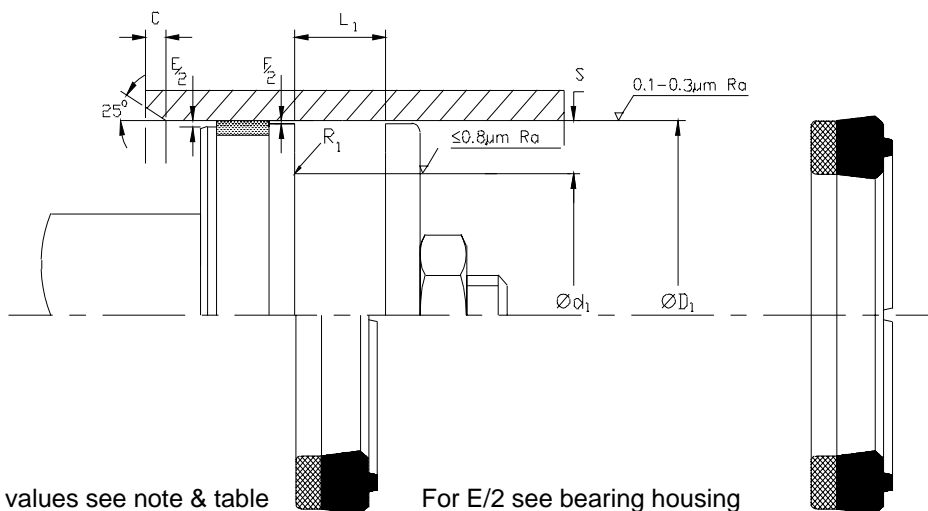




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | js11 | +0.25 -0.00 | Nominal | Min | Max |
|--------------------|-----------------|-----------------|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | S | C | R ₁ |
| CP 078047 | 20.00 | 12.00 | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 094063/1 | 24.00 | 16.00 | 7.50 | 4.00 | 2.00 | 0.20 |
| CP 094063/2 | 24.00 | 16.00 | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 098047 | 25.00 | 12.00 | 10.00 | 6.50 | 2.50 | 0.40 |
| CP 098070 | 25.00 | 18.00 | 7.00 | 3.50 | 2.00 | 0.20 |
| CP 102062/1 | 26.00 | 16.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 102066 | 26.00 | 17.00 | 5.70 | 4.50 | 2.00 | 0.20 |
| CP 102070 | 26.00 | 18.00 | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 102078 | 26.00 | 20.00 | 5.50 | 3.00 | 1.50 | 0.20 |
| CP 106059 | 27.00 | 15.00 | 7.00 | 6.00 | 2.50 | 0.40 |
| CP 110070 | 28.00 | 18.00 | 6.30 | 5.00 | 2.50 | 0.40 |
| CP 110078 | 28.00 | 20.00 | 7.00 | 4.00 | 2.00 | 0.20 |
| CP 110078/1 | 28.00 | 20.00 | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 114074 | 29.00 | 19.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 118078/1 | 30.00 | 20.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 118086/1 | 30.00 | 22.00 | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 118086/2 | 30.00 | 22.00 | 7.50 | 4.00 | 2.00 | 0.20 |
| CP 125086 | 32.00 | 22.00 | 7.50 | 5.00 | 2.50 | 0.40 |
| CP 125094 | 32.00 | 24.00 | 7.00 | 4.00 | 2.00 | 0.20 |
| CP 129098/1 | 33.00 | 25.00 | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 137098 | 35.00 | 25.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 141110/1 | 36.00 | 28.00 | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 149110/1 | 38.00 | 28.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 149118 | 38.00 | 30.00 | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 149118/1 | 38.00 | 30.00 | 8.50 | 4.00 | 2.00 | 0.20 |
| CP 157118 | 40.00 | 30.00 | 7.50 | 5.00 | 2.50 | 0.40 |
| CP 157125/1 | 40.00 | 32.00 | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 165125 | 42.00 | 32.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 169137 | 43.00 | 35.00 | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 173141 | 44.00 | 36.00 | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 173141/1 | 44.00 | 36.00 | 8.50 | 4.00 | 2.00 | 0.20 |
| CP 177118/1 | 45.00 | 30.00 | 9.00 | 7.50 | 4.00 | 0.80 |
| CP 177137/1 | 45.00 | 35.00 | 9.00 | 5.00 | 2.50 | 0.40 |
| CP 177137/5 | 45.00 | 35.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 181141/1 | 46.00 | 36.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 181149 | 46.00 | 38.00 | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 185125 | 47.00 | 32.00 | 11.00 | 7.50 | 4.00 | 0.80 |
| CP 188157 | 48.00 | 40.00 | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 196137/1 | 50.00 | 35.00 | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 196137/2 | 50.00 | 35.00 | 11.00 | 7.50 | 4.00 | 0.80 |
| CP 196157 | 50.00 | 40.00 | 11.00 | 5.00 | 2.50 | 0.40 |
| CP 196157/2 | 50.00 | 40.00 | 13.50 | 5.00 | 2.50 | 0.40 |
| CP 196157/3 | 50.00 | 40.00 | 7.50 | 5.00 | 2.50 | 0.40 |
| CP 196165 | 50.00 | 42.00 | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 200141 | 51.00 | 36.00 | 11.50 | 7.50 | 4.00 | 0.80 |





Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | js11 | +0.25 -0.00 | Nominal Sec. S | Min | Max |
|-----------------------|-----------------|-----------------|----------------|----------------------|------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | | C | R ₁ |
| CP 216157/2 | 55.00 | 40.00 | 11.50 | 7.50 | 4.00 | 0.80 |
| CP 216177 | 55.00 | 45.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 216177/3 | 55.00 | 45.00 | 10.50 | 5.00 | 2.50 | 0.40 |
| CP 228196 | 58.00 | 50.00 | 8.50 | 4.00 | 2.00 | 0.20 |
| CP 236177/1 | 60.00 | 45.00 | 11.50 | 7.50 | 4.00 | 0.80 |
| CP 236196 | 60.00 | 50.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 236196/3 | 60.00 | 50.00 | 14.50 | 5.00 | 2.50 | 0.40 |
| CP 244196/1 | 62.00 | 50.00 | 9.50 | 6.00 | 3.00 | 0.40 |
| CP 248188/2 | 63.00 | 48.00 | 11.00 | 7.50 | 4.00 | 0.80 |
| CP 255196/1 | 65.00 | 50.00 | 11.00 | 7.50 | 4.00 | 0.80 |
| CP 255216 | 65.00 | 55.00 | 10.50 | 5.00 | 2.50 | 0.40 |
| CP 255216/1 | 65.00 | 55.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 259220 | 66.00 | 56.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 275196 | 70.00 | 50.00 | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 275236/3 | 70.00 | 60.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 275236/4 | 70.00 | 60.00 | 14.50 | 5.00 | 2.50 | 0.40 |
| CP 279220 | 71.00 | 56.00 | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 283236 | 72.00 | 60.00 | 10.0 | 6.00 | 3.00 | 0.40 |
| CP 283236/2 | 72.00 | 60.00 | 11.00 | 6.00 | 3.00 | 0.40 |
| CP 295248 | 75.00 | 63.00 | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 303255 | 77.00 | 65.00 | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 307248 | 78.00 | 63.00 | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 314236 | 80.00 | 60.00 | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 314255 | 80.00 | 65.00 | 11.50 | 7.50 | 4.00 | 0.80 |
| CP 314275/1 | 80.00 | 70.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 314275/3 | 80.00 | 70.00 | 12.00 | 5.00 | 2.50 | 0.40 |
| CP 322275/1 | 82.00 | 70.00 | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 322275/2 | 82.00 | 70.00 | 11.00 | 6.00 | 3.00 | 0.40 |
| CP 334255 | 85.00 | 65.00 | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 334275 | 85.00 | 70.00 | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 334295/1 | 85.00 | 75.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 342295 | 87.00 | 75.00 | 9.50 | 6.00 | 3.00 | 0.40 |
| CP 354275/1 | 90.00 | 70.00 | 10.50 | 10.00 | 5.00 | 0.80 |
| CP 358318 | 91.00 | 81.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 362314 | 92.00 | 80.00 | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 362314/1 | 92.00 | 80.00 | 11.00 | 6.00 | 3.00 | 0.40 |
| CP 374295 | 95.00 | 75.00 | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 374314 | 95.00 | 80.00 | 13.00 | 7.50 | 4.00 | 0.80 |
| CP 374314/1 | 95.00 | 80.00 | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 374334 | 95.00 | 85.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 393314 | 100.00 | 80.00 | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 393334 | 100.00 | 85.00 | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 393354 | 100.00 | 90.00 | 10.50 | 5.00 | 2.50 | 0.40 |
| CP 401354 | 102.00 | 90.00 | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 413334/1 | 105.00 | 85.00 | 13.00 | 10.00 | 5.00 | 0.80 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | js11 | +0.25 -0.00 | Nominal | Min | Max |
|--------------------|-----------------|-----------------|----------------|-----------|------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | Sec. S | C | R ₁ |
| CP 413354 | 105.00 | 90.00 | 9.50 | 7.50 | 4.00 | 0.80 |
| CP 413354/1 | 105.00 | 90.00 | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 421374 | 107.00 | 95.00 | 12.50 | 6.00 | 3.00 | 0.40 |
| CP 433342 | 110.00 | 87.00 | 8.00 | 11.50 | 5.00 | 0.80 |
| CP 433342/1 | 110.00 | 87.00 | 18.50 | 11.50 | 5.00 | 0.80 |
| CP 452393/1 | 115.00 | 100.00 | 12.00 | 7.50 | 4.00 | 0.80 |
| CP 452413 | 115.00 | 105.00 | 11.00 | 5.00 | 2.50 | 0.40 |
| CP 472393 | 120.00 | 100.00 | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 492433 | 125.00 | 110.00 | 12.00 | 7.50 | 4.00 | 0.80 |
| CP 492452 | 125.00 | 115.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 523484 | 133.00 | 123.00 | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 590492 | 150.00 | 125.00 | 14.50 | 12.50 | 6.50 | 1.20 |
| CP 629551/2 | 160.00 | 140.00 | 12.00 | 10.00 | 5.00 | 0.80 |
| CP 661602 | 168.00 | 153.00 | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 669590/1 | 170.00 | 150.00 | 14.50 | 10.00 | 5.00 | 0.80 |



Design

CLARON STYLE P is designed with a symmetrical profile for use as a single acting rod or piston seal. The seal is a precision moulded Nitrile rubber sealing element with a bonded fabric reinforced base to resist extrusion. Designed with initial radial interference to effect low pressure sealing, at higher pressures the seal is energised thus increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, thus reducing friction and wear.

Style CP is an effective seal over a wide range of applications.

Operating Conditions


| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Maximum Diametral Clearance F
Pressure Bar

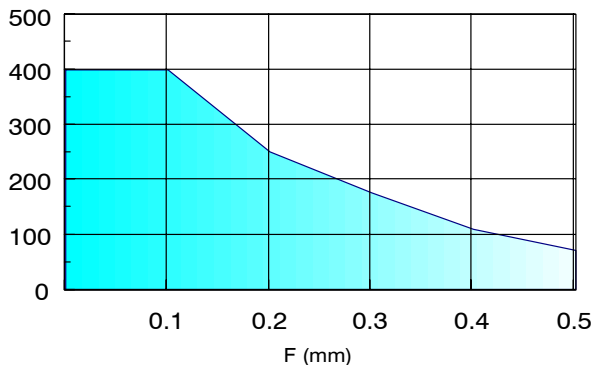

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C

The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

For Rod application see section C.



Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.



For a detailed checklist, refer to Appendix 3.

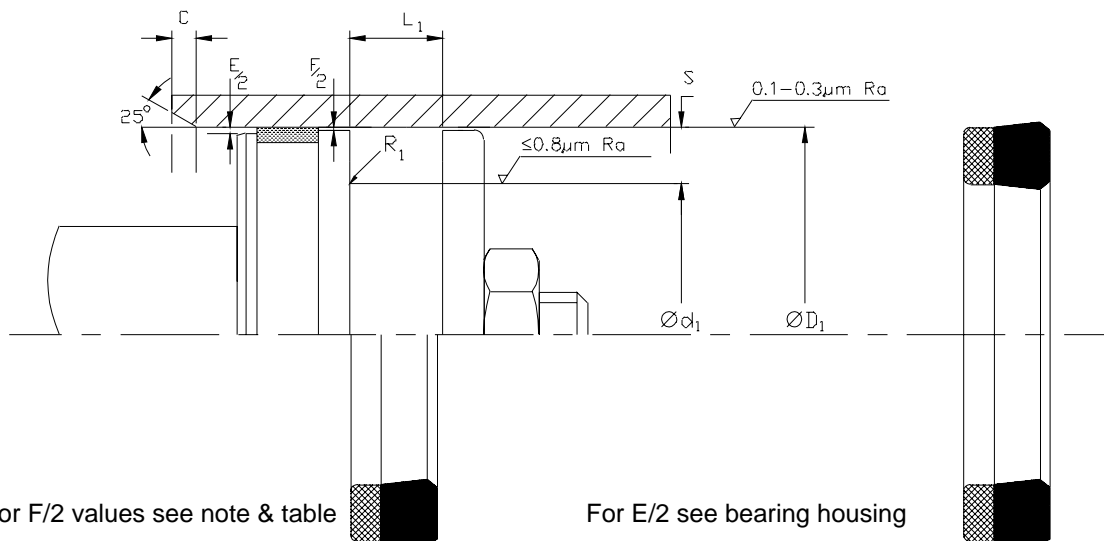

Single Acting Piston Seal
P Imperial




| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | | |
|--------------------|---|-------------------------|------------------------------------|----------------------|----------|-----------------------|
| | H10 ØD ₁ | js11 Ød ₂ | +0.025 +0.015 L ₁ | Nominal Sec. S | Min C | Max R ₁ |
| P 056025 | 0.562 | 0.250 | 0.250 | 0.156 | 0.093 | 0.010 |
| P 062031 | 0.625 | 0.312 | 0.250 | 0.156 | 0.093 | 0.010 |
| P 062037 | 0.625 | 0.375 | 0.187 | 0.125 | 0.093 | 0.010 |
| P 075037 | 0.750 | 0.375 | 0.281 | 0.187 | 0.093 | 0.010 |
| P 075050 | 0.750 | 0.500 | 0.187 | 0.125 | 0.093 | 0.010 |
| P 081043 | 0.812 | 0.437 | 0.281 | 0.187 | 0.093 | 0.010 |
| P 087050 | 0.875 | 0.500 | 0.281 | 0.187 | 0.093 | 0.010 |
| P 087062 | 0.875 | 0.625 | 0.187 | 0.125 | 0.093 | 0.010 |
| P 093056 | 0.937 | 0.562 | 0.281 | 0.187 | 0.093 | 0.010 |
| P 100062 | 1.000 | 0.625 | 0.281 | 0.187 | 0.093 | 0.010 |
| P 100075 | 1.000 | 0.750 | 0.187 | 0.125 | 0.093 | 0.010 |
| P 109075 | 1.093 | 0.750 | 0.281 | 0.171 | 0.093 | 0.010 |
| P 112062 | 1.125 | 0.625 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 112075 | 1.125 | 0.750 | 0.312 | 0.187 | 0.093 | 0.010 |
| P 112087 | 1.125 | 0.875 | 0.163 | 0.125 | 0.093 | 0.010 |
| P 118068 | 1.187 | 0.687 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 125075/1 | 1.250 | 0.750 | 0.312 | 0.250 | 0.125 | 0.015 |
| P 125075/2 | 1.250 | 0.750 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 125087 | 1.250 | 0.875 | 0.375 | 0.187 | 0.093 | 0.010 |
| P 125100 | 1.250 | 1.000 | 0.187 | 0.125 | 0.093 | 0.010 |
| P 125100/1 | 1.250 | 1.000 | 0.121 | 0.125 | 0.093 | 0.010 |
| P 131081 | 1.312 | 0.812 | 0.375 | 0.250 | 0.250 | 0.015 |
| P 137087 | 1.375 | 0.875 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 137087/1 | 1.375 | 0.875 | 0.250 | 0.250 | 0.125 | 0.125 |
| P 137100 | 1.375 | 1.000 | 0.250 | 0.187 | 0.093 | 0.010 |
| P 137112 | 1.375 | 1.125 | 0.187 | 0.125 | 0.093 | 0.010 |
| P 143093 | 1.437 | 0.937 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 150087 | 1.500 | 0.875 | 0.375 | 0.312 | 0.156 | 0.015 |
| P 150098 | 1.500 | 0.980 | 0.380 | 0.260 | 0.125 | 0.015 |
| P 150100 | 1.500 | 1.000 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 150100/1 | 1.500 | 1.000 | 0.250 | 0.250 | 0.125 | 0.015 |
| P 150125 | 1.500 | 1.250 | 0.187 | 0.125 | 0.093 | 0.010 |
| P 156112 | 1.562 | 1.125 | 0.343 | 0.218 | 0.125 | 0.015 |
| P 162100 | 1.625 | 1.000 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 162112 | 1.625 | 1.125 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 162125 | 1.625 | 1.250 | 0.281 | 0.187 | 0.093 | 0.010 |
| P 162125/1 | 1.625 | 1.250 | 0.250 | 0.187 | 0.093 | 0.010 |
| P 162125/2 | 1.625 | 1.250 | 0.500 | 0.187 | 0.093 | 0.010 |
| P 162130 | 1.627 | 1.302 | 0.240 | 0.162 | 0.093 | 0.010 |
| P 168118/1 | 1.687 | 1.187 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 175100 | 1.750 | 1.000 | 0.375 | 0.375 | 0.187 | 0.032 |
| P 175112 | 1.750 | 1.125 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 175123 | 1.750 | 1.235 | 0.340 | 0.257 | 0.125 | 0.015 |
| P 175125 | 1.750 | 1.250 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 175125/1 | 1.750 | 1.250 | 0.281 | 0.250 | 0.125 | 0.015 |




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js11 | +0.025 +0.015 | Nominal | Min | Max |
|--------------------|-----------------|-----------------|------------------|-----------|-------|----------------|
| | ØD ₂ | Ød ₁ | L ₁ | Sec. S | C | R ₁ |
| P 175125/2 | 1.750 | 1.250 | 0.250 | 0.250 | 0.125 | 0.015 |
| P 175137 | 1.750 | 1.375 | 0.281 | 0.187 | 0.093 | 0.010 |
| P 187125 | 1.875 | 1.250 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 187125/1 | 1.875 | 1.250 | 0.312 | 0.312 | 0.156 | 0.015 |
| P 187125/2 | 1.875 | 1.250 | 0.500 | 0.312 | 0.156 | 0.015 |
| P 187125/3 | 1.875 | 1.250 | 0.406 | 0.312 | 0.156 | 0.015 |
| P 187150 | 1.875 | 1.500 | 0.172 | 0.187 | 0.093 | 0.010 |
| P 187150/1 | 1.875 | 1.500 | 0.250 | 0.187 | 0.093 | 0.010 |
| P 193168 | 1.937 | 1.687 | 0.187 | 0.125 | 0.093 | 0.010 |
| P 200137/1 | 2.000 | 1.375 | 0.375 | 0.312 | 0.156 | 0.015 |
| P 200137/2 | 2.000 | 1.375 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 200137/3 | 2.000 | 1.375 | 0.500 | 0.312 | 0.156 | 0.015 |
| P 200137/4 | 2.000 | 1.375 | 0.312 | 0.312 | 0.156 | 0.015 |
| P 200148 | 2.000 | 1.485 | 0.340 | 0.257 | 0.125 | 0.015 |
| P 200150 | 2.000 | 1.500 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 200150/1 | 2.000 | 1.500 | 0.468 | 0.250 | 0.125 | 0.015 |
| P 200150/4 | 2.000 | 1.500 | 0.250 | 0.250 | 0.125 | 0.015 |
| P 200162/2 | 2.000 | 1.625 | 0.276 | 0.187 | 0.093 | 0.010 |
| P 212150/1 | 2.125 | 1.500 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 212150/2 | 2.125 | 1.500 | 0.468 | 0.312 | 0.156 | 0.015 |
| P 212175 | 2.125 | 1.750 | 0.172 | 0.187 | 0.093 | 0.010 |
| P 212175/1 | 2.125 | 1.750 | 0.300 | 0.187 | 0.093 | 0.010 |
| P 212175/2 | 2.125 | 1.750 | 0.281 | 0.187 | 0.093 | 0.010 |
| P 218150 | 2.187 | 1.500 | 0.437 | 0.343 | 0.156 | 0.015 |
| P 225150 | 2.250 | 1.500 | 0.468 | 0.375 | 0.187 | 0.032 |
| P 225162 | 2.250 | 1.625 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 225175/1 | 2.250 | 1.750 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 225175/2 | 2.250 | 1.750 | 0.437 | 0.250 | 0.125 | 0.015 |
| P 225187 | 2.250 | 1.875 | 0.265 | 0.187 | 0.093 | 0.010 |
| P 237175 | 2.375 | 1.750 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 237200 | 2.375 | 2.000 | 0.172 | 0.187 | 0.093 | 0.010 |
| P 243175 | 2.437 | 1.750 | 0.437 | 0.343 | 0.156 | 0.015 |
| P 250175 | 2.500 | 1.750 | 0.500 | 0.375 | 0.156 | 0.015 |
| P 250187 | 2.500 | 1.875 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 250187/1 | 2.500 | 1.875 | 0.375 | 0.312 | 0.156 | 0.015 |
| P 250187/3 | 2.500 | 1.875 | 0.312 | 0.312 | 0.156 | 0.015 |
| P 250198 | 2.500 | 1.980 | 0.360 | 0.260 | 0.125 | 0.015 |
| P 250200 | 2.500 | 2.000 | 0.312 | 0.250 | 0.125 | 0.015 |
| P 250200/1 | 2.500 | 2.000 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 250200/2 | 2.500 | 2.000 | 0.343 | 0.250 | 0.125 | 0.015 |
| P 262187 | 2.625 | 1.875 | 0.625 | 0.375 | 0.187 | 0.032 |
| P 262200 | 2.625 | 2.000 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 262200/2 | 2.625 | 2.000 | 0.312 | 0.312 | 0.156 | 0.015 |
| P 262200/3 | 2.625 | 2.000 | 0.500 | 0.312 | 0.156 | 0.015 |
| P 262212 | 2.625 | 2.125 | 0.375 | 0.250 | 0.125 | 0.015 |




P





Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js11 | +0.025 +0.015 | Nominal Sec. | Min | Max |
|-----------------------|-----------------|-----------------|------------------|-----------------|-------|----------------|
| | ØD ₂ | Ød ₁ | L ₁ | S | C | R ₁ |
| P 262225 | 2.625 | 2.250 | 0.172 | 0.187 | 0.093 | 0.010 |
| P 262225/1 | 2.625 | 2.250 | 0.210 | 0.187 | 0.093 | 0.010 |
| P 275200 | 2.750 | 2.000 | 0.437 | 0.375 | 0.187 | 0.032 |
| P 275200/1 | 2.750 | 2.000 | 0.625 | 0.375 | 0.187 | 0.032 |
| P 275200/2 | 2.750 | 2.000 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 275212 | 2.750 | 2.125 | 0.375 | 0.312 | 0.156 | 0.015 |
| P 275225 | 2.750 | 2.250 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 275231 | 2.750 | 2.312 | 0.375 | 0.219 | 0.093 | 0.010 |
| P 287200 | 2.875 | 2.000 | 0.625 | 0.437 | 0.187 | 0.032 |
| P 287212 | 2.875 | 2.125 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 287225 | 2.875 | 2.250 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 287237 | 2.875 | 2.375 | 0.281 | 0.250 | 0.125 | 0.015 |
| P 300200 | 3.000 | 2.000 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 300212 | 3.000 | 2.125 | 0.500 | 0.437 | 0.187 | 0.032 |
| P 300225 | 3.000 | 2.250 | 0.375 | 0.375 | 0.187 | 0.032 |
| P 300225/1 | 3.000 | 2.250 | 0.500 | 0.375 | 0.187 | 0.032 |
| P 300225/2 | 3.000 | 2.250 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 300237 | 3.000 | 2.375 | 0.468 | 0.312 | 0.156 | 0.015 |
| P 300250 | 3.000 | 2.500 | 0.312 | 0.250 | 0.125 | 0.015 |
| P 306250 | 3.062 | 2.500 | 0.437 | 0.281 | 0.125 | 0.015 |
| P 312237 | 3.125 | 2.375 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 312250 | 3.125 | 2.500 | 0.625 | 0.312 | 0.156 | 0.015 |
| P 312250/1 | 3.125 | 2.500 | 0.375 | 0.312 | 0.156 | 0.015 |
| P 325250 | 3.250 | 2.500 | 0.375 | 0.375 | 0.187 | 0.032 |
| P 325250/1 | 3.250 | 2.500 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 325250/2 | 3.250 | 2.500 | 0.625 | 0.375 | 0.187 | 0.032 |
| P 325250/3 | 3.250 | 2.500 | 0.468 | 0.375 | 0.187 | 0.032 |
| P 325262 | 3.250 | 2.625 | 0.562 | 0.312 | 0.156 | 0.015 |
| P 325273 | 3.250 | 2.735 | 0.340 | 0.257 | 0.125 | 0.015 |
| P 325275 | 3.250 | 2.750 | 0.375 | 0.257 | 0.125 | 0.015 |
| P 337262 | 3.375 | 2.625 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 337275/1 | 3.375 | 2.750 | 0.437 | 0.312 | 0.156 | 0.015 |
| P 350250 | 3.500 | 2.500 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 350275 | 3.500 | 2.750 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 350275/1 | 3.500 | 2.750 | 0.375 | 0.375 | 0.187 | 0.032 |
| P 350275/3 | 3.500 | 2.750 | 0.500 | 0.375 | 0.187 | 0.032 |
| P 350287 | 3.500 | 2.875 | 0.470 | 0.312 | 0.156 | 0.015 |
| P 350300 | 3.500 | 3.000 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 362262 | 3.625 | 2.625 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 362287 | 3.625 | 2.875 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 362300 | 3.625 | 3.000 | 0.375 | 0.312 | 0.156 | 0.015 |
| P 375275 | 3.750 | 2.750 | 0.500 | 0.500 | 0.250 | 0.032 |
| P 375300 | 3.750 | 3.000 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 375300/1 | 3.750 | 3.000 | 0.500 | 0.375 | 0.187 | 0.032 |
| P 375300/2 | 3.750 | 3.000 | 0.375 | 0.375 | 0.187 | 0.032 |




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js11 | +0.025 +0.015 | Nominal Sec. | Min | Max |
|-----------------------|-----------------|-----------------|------------------|-----------------|-------|----------------|
| | ØD ₂ | Ød ₁ | L ₁ | S | C | R ₁ |
| P 375323 | 3.750 | 3.230 | 0.360 | 0.260 | 0.125 | 0.015 |
| P 387287 | 3.875 | 2.875 | 0.625 | 0.500 | 0.250 | 0.032 |
| P 387312 | 3.875 | 3.125 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 400300 | 4.000 | 3.000 | 0.625 | 0.500 | 0.250 | 0.032 |
| P 400300/2 | 4.000 | 3.000 | 0.375 | 0.500 | 0.250 | 0.032 |
| P 400325/1 | 4.000 | 3.250 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 400325/2 | 4.000 | 3.250 | 0.500 | 0.375 | 0.187 | 0.032 |
| P 400350 | 4.000 | 3.500 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 412337 | 4.125 | 3.375 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 412350 | 4.125 | 3.500 | 0.375 | 0.312 | 0.156 | 0.015 |
| P 425325 | 4.250 | 3.250 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 425350/1 | 4.250 | 3.500 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 450350/1 | 4.500 | 3.500 | 0.562 | 0.500 | 0.250 | 0.032 |
| P 450350/2 | 4.500 | 3.500 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 450350/3 | 4.500 | 3.500 | 0.375 | 0.500 | 0.250 | 0.032 |
| P 450375 | 4.500 | 3.750 | 0.500 | 0.375 | 0.187 | 0.032 |
| P 450375/1 | 4.500 | 3.750 | 0.410 | 0.375 | 0.187 | 0.032 |
| P 450400 | 4.500 | 4.000 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 462362 | 4.625 | 3.625 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 462362/1 | 4.625 | 3.625 | 0.500 | 0.500 | 0.250 | 0.032 |
| P 475375/1 | 4.750 | 3.750 | 0.812 | 0.500 | 0.250 | 0.032 |
| P 475375/2 | 4.750 | 3.750 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 475425 | 4.750 | 4.250 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 487400 | 4.875 | 4.000 | 0.656 | 0.437 | 0.187 | 0.032 |
| P 487437 | 4.875 | 4.375 | 0.375 | 0.250 | 0.125 | 0.032 |
| P 500400 | 5.000 | 4.000 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 500425 | 5.000 | 4.250 | 0.562 | 0.375 | 0.187 | 0.032 |
| P 525400 | 5.250 | 4.000 | 0.500 | 0.625 | 0.250 | 0.046 |
| P 525425 | 5.250 | 4.250 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 537437 | 5.375 | 4.375 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 550450 | 5.500 | 4.500 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 550500 | 5.500 | 5.000 | 0.375 | 0.250 | 0.125 | 0.015 |
| P 575475 | 5.750 | 4.750 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 600500 | 6.000 | 5.000 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 600537 | 6.000 | 5.375 | 0.375 | 0.312 | 0.156 | 0.015 |
| P 625525/1 | 6.250 | 5.250 | 0.531 | 0.500 | 0.250 | 0.032 |
| P 625525/3 | 6.250 | 5.250 | 0.875 | 0.500 | 0.250 | 0.032 |
| P 625550 | 6.250 | 5.500 | 0.687 | 0.375 | 0.187 | 0.032 |
| P 650550 | 6.500 | 5.500 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 675575 | 6.750 | 5.750 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 700575 | 7.000 | 5.750 | 0.937 | 0.625 | 0.250 | 0.046 |
| P 700600 | 7.000 | 6.000 | 0.750 | 0.500 | 0.250 | 0.032 |
| P 700625 | 7.000 | 6.250 | 0.562 | 0.375 | 0.156 | 0.015 |
| P 775650 | 7.750 | 6.500 | 1.000 | 0.625 | 0.250 | 0.046 |
| P 800700 | 8.000 | 7.000 | 0.875 | 0.500 | 0.250 | 0.032 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js11 | +0.025 +0.015 | Nominal Sec. | Min | Max |
|-----------------------|---------------|---------------|------------------|-----------------|-------|-------|
| | ØD_2 | Ød_1 | L_1 | S | C | R_1 |
| P 850725 | 8.500 | 7.250 | 1.000 | 0.625 | 0.250 | 0.046 |
| P 950837 | 9.500 | 8.375 | 0.750 | 0.562 | 0.250 | 0.046 |



Design

CLARON STYLE GP is designed with a symmetrical profile for Piston or Rod applications. The seal is a precision moulded Nitrile rubber with a fabric reinforced base to resist extrusion. Designed with initial radial interference to effect low-pressure sealing, the seal is progressively energised at higher pressures thereby increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within its surface, thus reducing friction and wear. Style GP is designed to provide effective low pressure sealing through distortion of the lips rather than "squeeze". This gives an improved response to pressure variations and reduces low pressure stiction to ensure a smoother return stroke.


Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 section for further information.

Maximum Diametral Clearance F
Pressure Bar

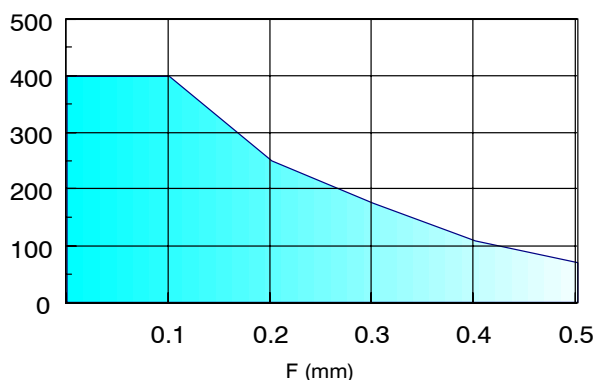

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C

The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

For Rod application see section C.

Fitting


Style GP is designed for use on a split piston and may be used with Claron Seal Retainer Style PSR. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

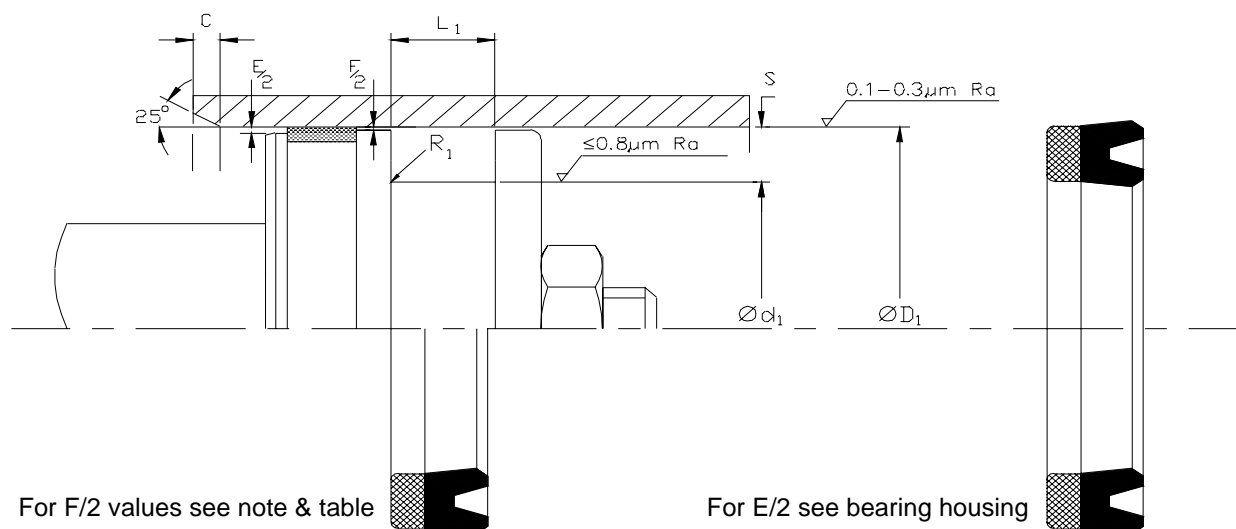

ClaronPolyseal®
Single Acting Piston Seal

GP

Metric




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js11 | +0.25 -0.00 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----------------|-----------|-------------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | Sec. S | Chamf. C | R ₁ |
| GP157118 | 40 | 30 | 7.0 | 5.0 | 2.5 | 0.4 |
| GP196157 | 50 | 40 | 7.0 | 5.0 | 2.5 | 0.4 |
| GP236196 | 60 | 50 | 7.0 | 5.0 | 2.5 | 0.4 |
| GP279220 | 71 | 56 | 10.0 | 7.5 | 4.0 | 0.8 |
| GP275236 | 70 | 60 | 7.0 | 5.0 | 2.5 | 0.4 |
| GP314236 | 80 | 60 | 13.0 | 10.0 | 5.0 | 0.8 |
| GP307248 | 78 | 63 | 10.0 | 7.5 | 4.0 | 0.8 |
| GP334275 | 85 | 70 | 12.5 | 7.5 | 4.0 | 0.8 |
| GP354275 | 90 | 70 | 13.0 | 10.0 | 5.0 | 0.8 |
| GP393314 | 100 | 80 | 13.0 | 10.0 | 5.0 | 0.8 |
| GP433354 | 110 | 90 | 13.0 | 10.0 | 5.0 | 0.8 |

ClaronPolyseal®
Single Acting Piston Seal

GP

Imperial




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js11 | +0.025 +0.015 L ₁ | Nominal Sec. S | Min Chamf. C | Max R ₁ |
|-----------------------|-----------------|-----------------|------------------------------------|----------------------|--------------------|-----------------------|
| | ØD ₁ | Ød ₁ | | | | |
| GP 150100 | 1.500 | 1.000 | 0.375 | 0.250 | 0.125 | 0.015 |
| GP 200150 | 2.000 | 1.500 | 0.375 | 0.250 | 0.125 | 0.015 |
| GP 200150/1 | 2.000 | 1.500 | 0.468 | 0.250 | 0.125 | 0.015 |
| GP 212150 | 2.125 | 1.500 | 0.468 | 0.313 | 0.156 | 0.015 |
| GP 237200/1 | 2.375 | 2.000 | 0.360 | 0.188 | 0.093 | 0.010 |
| GP 262200/1 | 2.625 | 2.000 | 0.312 | 0.313 | 0.156 | 0.015 |
| GP 300237 | 3.000 | 2.375 | 0.312 | 0.313 | 0.156 | 0.015 |
| GP 325250/1 | 3.250 | 2.500 | 0.562 | 0.375 | 0.187 | 0.032 |

Single Acting Piston Seal CPE

Metric



Design

CLARON STYLE CPE is designed for use as a single acting Piston seal. The seal is a precision moulded Nitrile rubber sealing element with a fabric reinforced base to resist extrusion. Style CPE also has the added benefit of a clip on POM anti-extrusion ring. Designed with initial radial interference to effect low pressure sealing, at higher pressures the seal is energised thus increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, thus reducing friction and wear. Style CP is produced with radial grooves incorporated into the top of the seal on the pressure side. This innovative design ensures a rapid energisation of the seal without excessive end float and resultant wear. Style CP is an effective design over a wide range of applications.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |


These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to appendix 1 for further information.

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Pressure Bar

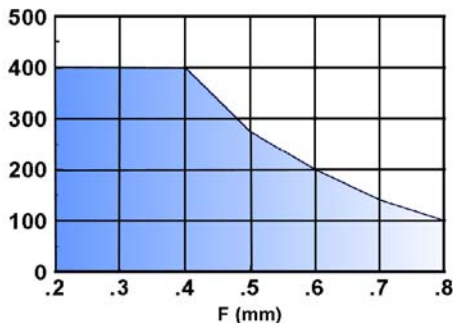

Maximum Diametral Clearance F

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C

The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


For Rod application see section C.


Fitting

Style CPE is designed to be fitted onto a spit and may be used together with Claron Style PSR retainer.

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

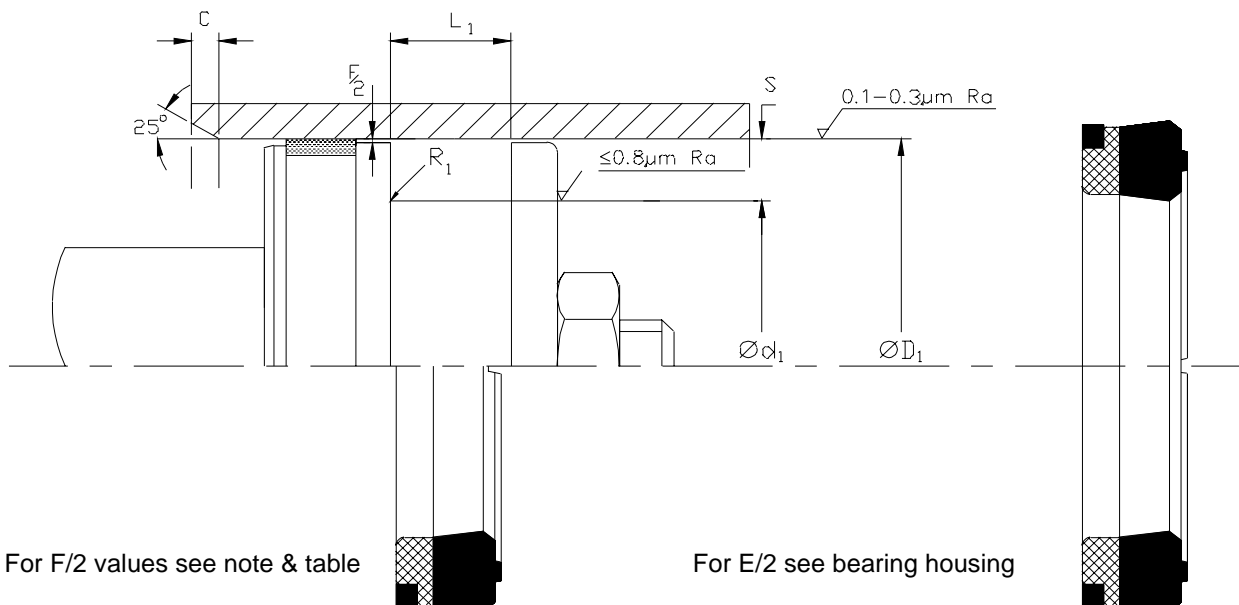





ClaronPolyseal®
Single Acting Piston Seal
CPE



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js 11 | +0.25 -0.00 L ₁ | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----------------------------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | | S | C | R ₁ |
| CPE 157110 | 40.00 | 28.00 | 9.00 | 6.00 | 3.00 | 0.40 |
| CPE 196149 | 50.00 | 38.00 | 9.40 | 6.00 | 3.00 | 0.40 |
| CPE 236177 | 60.00 | 45.00 | 10.50 | 7.50 | 4.00 | 0.40 |
| CPE 314236 | 80.00 | 60.00 | 14.50 | 10.00 | 5.00 | 0.40 |
| CPE 393314 | 100.00 | 80.00 | 14.00 | 10.00 | 5.00 | 0.40 |

ClaronPolyseal® Single Acting Piston Seal Imperial PEO



Design

Claron Style PEO is designed for use as a single acting piston seal. The seal is a precision moulded Nitrile rubber sealing element with a bonded reinforced fabric base and an acetal back up ring to resist extrusion. The acetal back up ring allows larger clearances and higher pressures. The seal is designed with initial radial interference to effect low pressure sealing. At higher pressures the seal is energised thus increasing sealing. The rubberised fabric header has the advantage of retaining fluid within its surface thus reducing both friction and wear.


Style PEO is an effective seal over a wide range of applications.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Pressure Bar

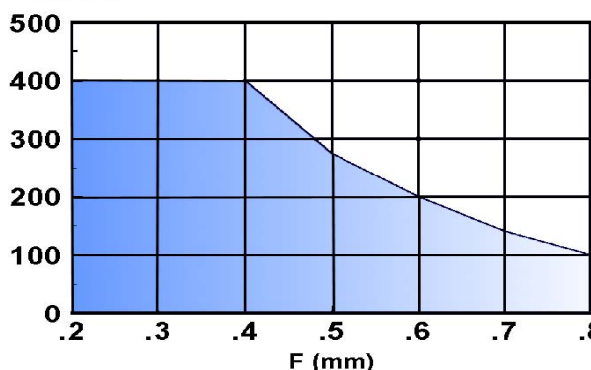

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Maximum Diametral Clearance F

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style PEO is designed to be fitted onto a split piston, and may be used with a Claron Style PSR retainer. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.



For a detailed checklist, refer to Appendix 3.

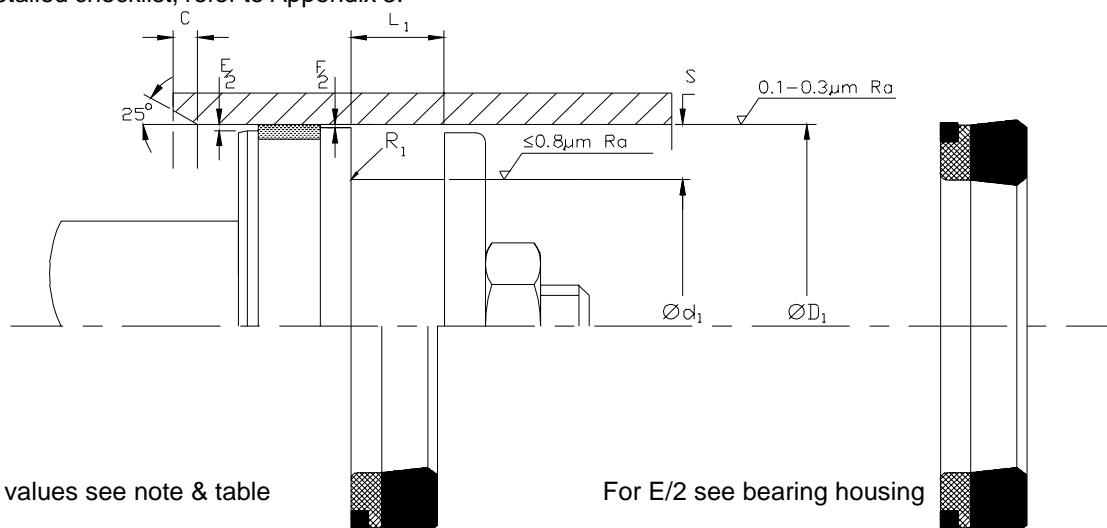

For F/2 values see note & table



For E/2 see bearing housing

PEO



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | js11 | +0.025 +0.015 | Nominal Sec. | Min | Max |
|-----------------------|-----------------|-----------------|------------------|-----------------|-------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | S | C | R ₁ |
| PEO 100062 | 1.000 | 0.625 | 0.281 | 0.188 | 0.093 | 0.010 |
| PEO 112075 | 1.125 | 0.750 | 0.312 | 0.188 | 0.093 | 0.010 |
| PEO 125075/1 | 1.250 | 0.750 | 0.312 | 0.250 | 0.125 | 0.010 |
| PEO 150100 | 1.500 | 1.000 | 0.375 | 0.250 | 0.125 | 0.010 |
| PEO 168118 | 1.687 | 1.187 | 0.312 | 0.250 | 0.125 | 0.010 |
| PEO 175112 | 1.750 | 1.125 | 0.437 | 0.313 | 0.156 | 0.015 |
| PEO 200137/1 | 2.000 | 1.375 | 0.375 | 0.313 | 0.156 | 0.015 |
| PEO 200137/2 | 2.000 | 1.375 | 0.437 | 0.313 | 0.156 | 0.015 |
| PEO 200150 | 2.000 | 1.500 | 0.375 | 0.250 | 0.125 | 0.010 |
| PEO 237175 | 2.375 | 1.750 | 0.437 | 0.313 | 0.156 | 0.015 |
| PEO 250187 | 2.500 | 1.875 | 0.437 | 0.313 | 0.156 | 0.015 |
| PEO 275200/1 | 2.750 | 2.000 | 0.625 | 0.375 | 0.187 | 0.010 |
| PEO 275200/2 | 2.750 | 2.000 | 0.562 | 0.375 | 0.187 | 0.032 |
| PEO 300225/2 | 3.000 | 2.250 | 0.562 | 0.375 | 0.187 | 0.032 |
| PEO 325250/1 | 3.250 | 2.500 | 0.562 | 0.375 | 0.187 | 0.032 |
| PEO 350300 | 3.500 | 3.000 | 0.375 | 0.250 | 0.125 | 0.010 |
| PEO 362300 | 3.625 | 3.000 | 0.375 | 0.313 | 0.156 | 0.015 |
| PEO 400325/1 | 4.000 | 3.250 | 0.562 | 0.375 | 0.187 | 0.032 |
| PEO 400350 | 4.000 | 3.500 | 0.375 | 0.250 | 0.125 | 0.010 |
| PEO 450350/1 | 4.500 | 3.500 | 0.562 | 0.500 | 0.250 | 0.032 |
| PEO 500400 | 5.000 | 4.000 | 0.750 | 0.500 | 0.250 | 0.032 |
| PEO 700600 | 7.000 | 6.000 | 0.750 | 0.500 | 0.250 | 0.032 |
| PEO 700625 | 7.000 | 6.250 | 0.562 | 0.375 | 0.187 | 0.032 |
| PEO 825750 | 8.250 | 7.500 | 0.562 | 0.375 | 0.187 | 0.032 |



Design

Claron Style GPE is designed for use as a single acting piston seal. The seal is a precision moulded Nitrile rubber sealing element with a proportional bonded reinforced fabric base, and an acetal back up ring to resist extrusion. The acetal anti-extrusion ring allows larger clearances and higher pressures. Style GPE is designed to provide effective low pressure sealing through distortion of the lips rather than "squeeze". This gives an improved response to pressure variations and reduces low pressure stiction to ensure a smoother return stroke. The seal is designed with initial radial interference to effect low pressure sealing. The rubberised fabric header has the advantage of retaining fluid within its surface thus reducing both friction and wear. Style GPE is an effective seal over a wide range of applications.

Operating Conditions


| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Pressure Bar

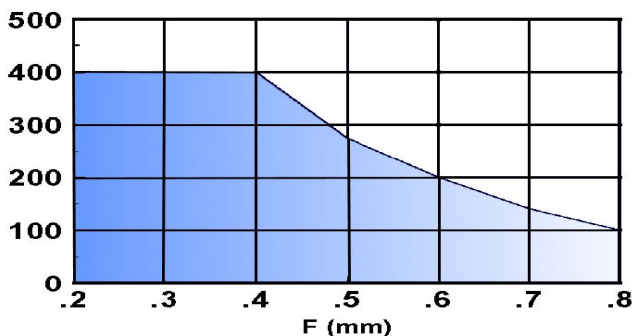

Maximum Diametral Clearance F

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting


Style GPE is designed to be fitted onto a split piston and may be used with Claron Style PSR retainer. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

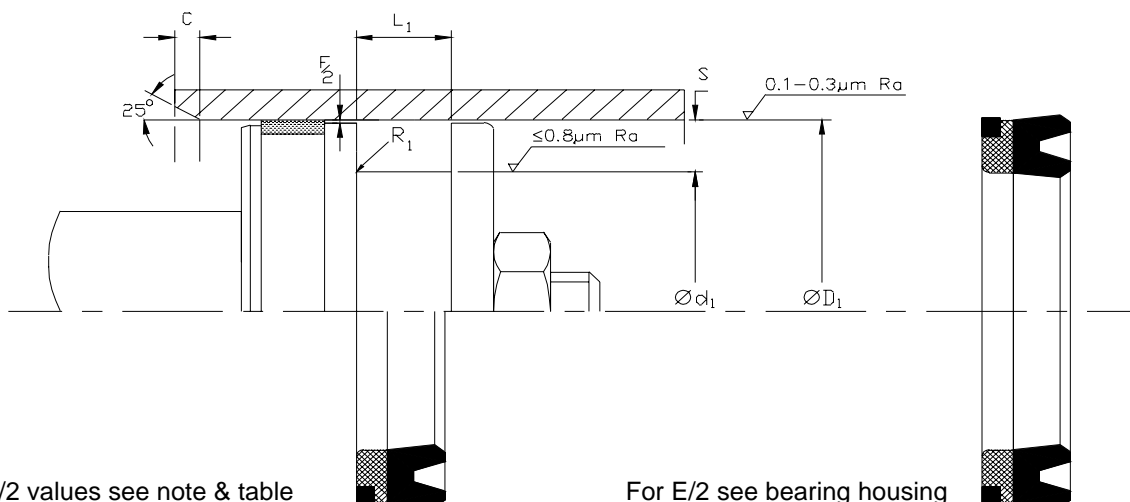


For F/2 values see note & table

For E/2 see bearing housing



ClaronPolyseal®
Single Acting Piston Seal Metric


GPE



| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | | |
|-----------------------|---|-------------------------|----------------------------------|----------------------|--------------------|-----------------------|
| | H 10 ØD ₁ | js11 Ød ₁ | +0.63 +0.38 L ₁ | Nominal Sec. S | Min Chamf. C | Max R ₁ |
| GPE 125086 | 32.00 | 22.00 | 9.00 | 5.00 | 2.50 | 0.40 |
| GPE 177118/2 | 45.00 | 30.00 | 10.00 | 7.50 | 4.00 | 0.60 |
| GPE 196137 | 50.00 | 35.00 | 11.00 | 7.50 | 4.00 | 0.60 |
| GPE 196157/1 | 50.00 | 40.00 | 10.00 | 5.00 | 2.50 | 0.40 |
| GPE 216157/1 | 55.00 | 40.00 | 10.50 | 7.50 | 4.00 | 0.60 |
| GPE 248188/1 | 63.00 | 48.00 | 9.50 | 7.50 | 4.00 | 0.60 |
| GPE 248196 | 63.00 | 50.00 | 10.00 | 6.50 | 4.00 | 0.60 |
| GPE 275196 | 70.00 | 50.00 | 14.00 | 10.00 | 5.00 | 0.80 |
| GPE 314236 | 80.00 | 60.00 | 14.00 | 10.00 | 5.00 | 0.80 |
| GPE 393314 | 100.00 | 80.00 | 14.00 | 10.00 | 5.00 | 0.80 |
| GPE 413334/3 | 105.00 | 85.00 | 18.00 | 10.00 | 5.00 | 0.80 |
| GPE 433354 | 110.00 | 90.00 | 12.50 | 10.00 | 5.00 | 0.80 |



Single Acting Piston Seal Imperial

GPE



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js11 | +0.025 +0.015 | Nominal Sec S | Min Chamf. C | Max |
|-----------------------|-----------------|-----------------|------------------|---------------------|--------------------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | | | R ₁ |
| GPE 112062 | 1.125 | 0.625 | 0.468 | 0.250 | 0.125 | 0.015 |
| GPE 141087 | 1.417 | 0.875 | 0.468 | 0.271 | 0.125 | 0.015 |
| GPE 150100 | 1.500 | 1.000 | 0.375 | 0.250 | 0.125 | 0.015 |
| GPE 162100 | 1.625 | 1.000 | 0.437 | 0.312 | 0.156 | 0.025 |
| GPE 175125 | 1.750 | 1.250 | 0.375 | 0.250 | 0.125 | 0.015 |
| GPE 178116 | 1.786 | 1.161 | 0.468 | 0.312 | 0.156 | 0.025 |
| GPE 187125/2 | 1.875 | 1.250 | 0.500 | 0.312 | 0.156 | 0.025 |
| GPE 200137/1 | 2.000 | 1.375 | 0.375 | 0.312 | 0.156 | 0.025 |
| GPE 212150 | 2.125 | 1.500 | 0.468 | 0.312 | 0.156 | 0.025 |
| GPE 225162 | 2.250 | 1.625 | 0.437 | 0.312 | 0.156 | 0.025 |
| GPE 237175 | 2.375 | 1.750 | 0.437 | 0.312 | 0.155 | 0.025 |
| GPE 250187/1 | 2.500 | 1.875 | 0.375 | 0.312 | 0.156 | 0.025 |
| GPE 262200 | 2.625 | 2.000 | 0.437 | 0.312 | 0.156 | 0.025 |
| GPE 275200 | 2.750 | 2.000 | 0.437 | 0.375 | 0.187 | 0.031 |
| GPE 275200/2 | 2.750 | 2.000 | 0.562 | 0.375 | 0.187 | 0.031 |
| GPE 275212 | 2.750 | 2.125 | 0.468 | 0.312 | 0.156 | 0.025 |
| GPE 300225/1 | 3.000 | 2.250 | 0.500 | 0.375 | 0.187 | 0.031 |
| GPE 325250/1 | 3.250 | 2.500 | 0.562 | 0.375 | 0.187 | 0.031 |
| GPE 325262 | 3.250 | 2.625 | 0.562 | 0.312 | 0.156 | 0.025 |
| GPE 350275 | 3.500 | 2.750 | 0.562 | 0.375 | 0.187 | 0.031 |
| GPE 350300/1 | 3.500 | 3.000 | 0.500 | 0.250 | 0.125 | 0.015 |
| GPE 362287 | 3.625 | 2.875 | 0.562 | 0.375 | 0.187 | 0.031 |
| GPE 362300/1 | 3.625 | 3.000 | 0.437 | 0.312 | 0.156 | 0.025 |
| GPE 400325/1 | 4.000 | 3.250 | 0.562 | 0.375 | 0.187 | 0.031 |
| GPE 425350/1 | 4.250 | 3.500 | 0.562 | 0.375 | 0.187 | 0.031 |
| GPE 450375 | 4.500 | 3.750 | 0.562 | 0.375 | 0.187 | 0.032 |
| GPE 500400 | 5.000 | 4.000 | 0.750 | 0.500 | 0.250 | 0.046 |
| GPE 600500 | 6.000 | 5.000 | 0.750 | 0.500 | 0.250 | 0.046 |
| GPE 700600 | 7.000 | 6.000 | 0.750 | 0.500 | 0.250 | 0.046 |



Design


Designed for use on split pistons, the seal is a precision moulded rubber element with a reinforced fabric base. The seal is fitted with Polyacetal anti-extrusion wear rings on the O.D. to allow larger machining clearances between the piston head and cylinder bore, and to permit higher working pressures. The seal is designed with sufficient radial sectional interference that on complete assembly low pressure sealing is effected. The supporting rubberised fabric has the capability of retaining the sealing media thus assisting in reducing friction and wear. Style PW has proven to be effective over a wide range of applications.

Operating Conditions

| Maximum | Pressure |
|-------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

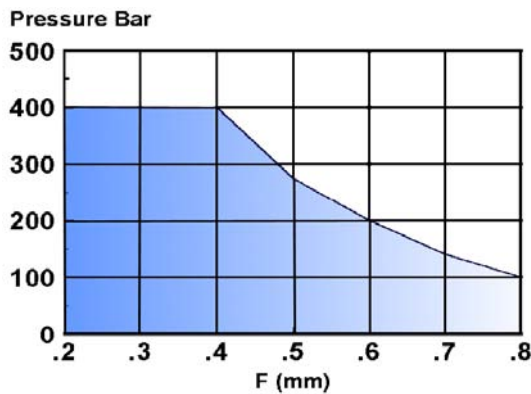

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Continuous operating temperature for various fluids


| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

Style PW is designed to be fitted onto a split piston and may be used with Claron seal retainer Style PSR. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

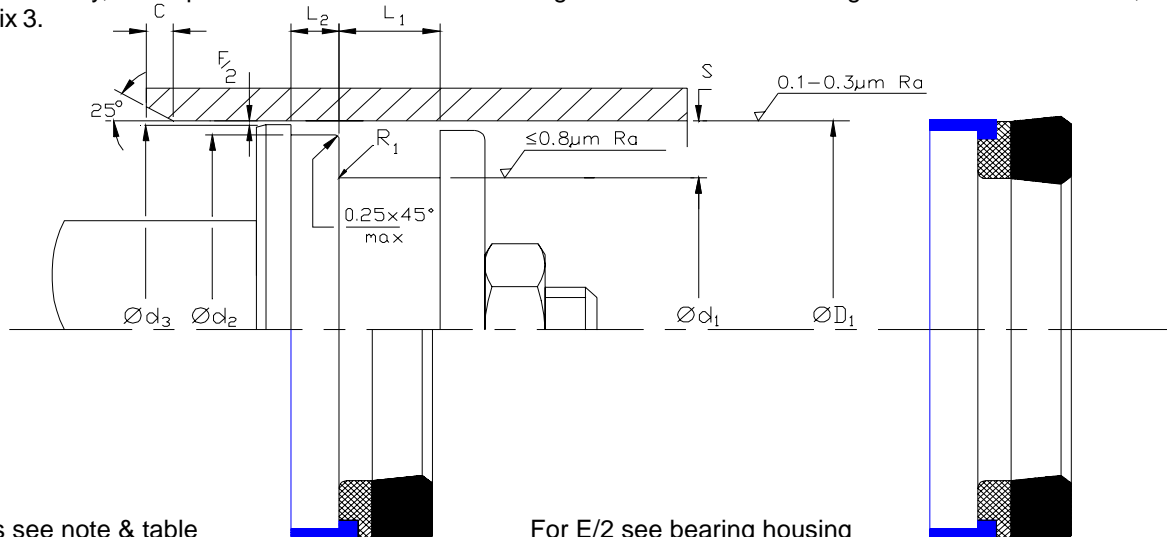

For F/2 values see note & table


For E/2 see bearing housing




ClaronPolyseal®
Single Acting Piston Seal

Imperial

PW




| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | | | | | | |
|-----------------------|---|--------------------------|--------------------------|--------------------------|------------------------------------|------------------------------------|--------------|----------|-----------------------|-----------------------|
| | H 10 ØD ₁ | js 11 Ød ₁ | js 10 Ød ₂ | js 11 Ød ₃ | +0.025 +0.015 L ₁ | +0.004 -0.000 L ₂ | Nominal S | Min C | Max R ₁ | Max R ₂ |
| PW 100062 | 1.000 | 0.625 | 0.883 | 0.964 | 0.281 | 0.250 | 0.187 | 0.093 | 0.008 | 0.008 |
| PW 125075/2 | 1.250 | 0.750 | 1.111 | 1.208 | 0.375 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| PW 150100 | 1.500 | 1.000 | 1.360 | 1.458 | 0.375 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| PW 168118 | 1.687 | 1.187 | 1.547 | 1.645 | 0.312 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| PW 175112 | 1.750 | 1.125 | 1.570 | 1.698 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| PW 200137/1 | 2.000 | 1.375 | 1.820 | 1.948 | 0.375 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| PW 200137/2 | 2.000 | 1.375 | 1.820 | 1.948 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| PW 200137/3 | 2.000 | 1.375 | 1.820 | 1.948 | 0.500 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| PW 225162 | 2.250 | 1.625 | 2.069 | 2.198 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| PW 237175 | 2.375 | 1.750 | 2.194 | 2.322 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| PW 250187 | 2.500 | 1.875 | 2.319 | 2.446 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| PW 250200 | 2.500 | 2.000 | 2.360 | 2.447 | 0.312 | 0.250 | 0.250 | 0.125 | 0.025 | 0.008 |
| PW 275200 | 2.750 | 2.000 | 2.522 | 2.685 | 0.437 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 275200/1 | 2.750 | 2.000 | 2.522 | 2.685 | 0.625 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 275200/2 | 2.750 | 2.000 | 2.522 | 2.685 | 0.562 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 300225/1 | 3.000 | 2.250 | 2.772 | 2.935 | 0.500 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 300225/2 | 3.000 | 2.250 | 2.772 | 2.935 | 0.562 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 312237 | 3.125 | 2.375 | 2.896 | 3.070 | 0.562 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 325250/1 | 3.250 | 2.500 | 3.069 | 3.190 | 0.562 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 350275 | 3.500 | 2.750 | 3.271 | 3.437 | 0.562 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 375275 | 3.750 | 2.750 | 3.508 | 3.685 | 0.500 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| PW 400325/1 | 4.000 | 3.250 | 3.770 | 3.933 | 0.562 | 0.250 | 0.375 | 0.187 | 0.032 | 0.008 |
| PW 450350/1 | 4.500 | 3.500 | 4.229 | 4.422 | 0.562 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| PW 500400 | 5.000 | 4.000 | 4.728 | 4.920 | 0.750 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| PW 700600 | 7.000 | 6.000 | 6.724 | 5.919 | 0.750 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| PW 725600 | 7.250 | 6.000 | 6.979 | 7.170 | 1.000 | 0.250 | 0.625 | 0.250 | 0.046 | 0.015 |



ClaronPolyseal® Single Acting Piston Seal GPW

Metric
Imperial



Design


Claron Style GPW is designed for use as a single acting piston seal. The seal is a precision moulded Nitrile rubber sealing element with a proportional bonded reinforced NBR header and an acetal bearing ring to resist extrusion. The acetal bearing ring resists extrusion of the seal to allow greater clearances and higher pressures, and provides bearing support for the piston preventing misalignment and metal to metal contact between piston and bore. Style GPW is designed to provide effective low pressure sealing through distortion of the lips rather than "squeeze". This gives an improved response to pressure variations and reduces low pressure stiction to ensure a smoother return stroke. Style GPW has proven to be effective over a wide range of applications.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

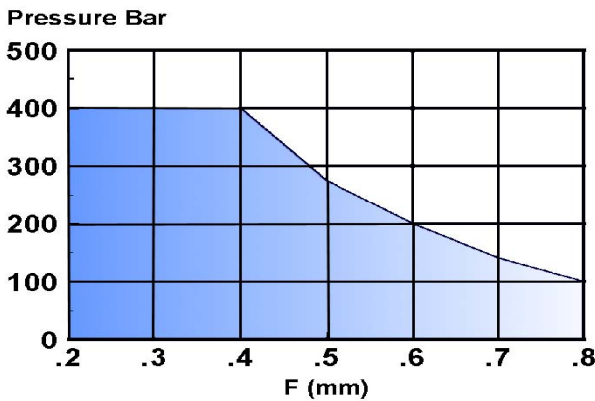

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting


Style GPW is designed to be fitted onto a split piston and may be used with Claron Style PSR retainer. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

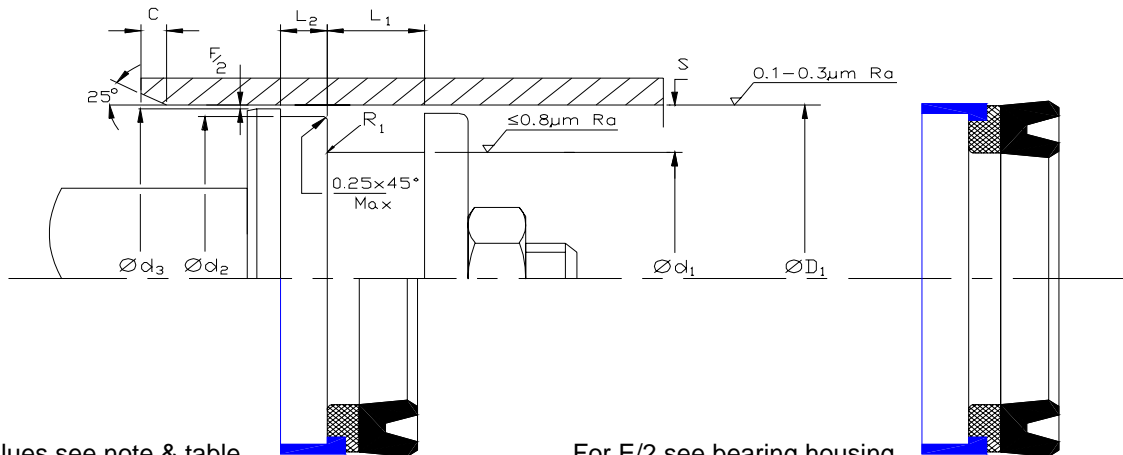

For F/2 values see note & table


For E/2 see bearing housing





ClaronPolyseal®
Single Acting Piston Seal

GPW

Metric





| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | | | | | | |
|-----------------------|---|-----------------|-----------------|-----------------|----------------|----------------|---------|------|----------------|----------------|
| | H 10 | js 11 | js 10 | js 11 | +0.63 +0.38 | +0.1 -0.0 | Nominal | Min | Max | Max |
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | L ₁ | L ₂ | S | C | R ₁ | R ₂ |
| GPW 196137 | 50.00 | 35.00 | 43.96 | 48.10 | 11.00 | 6.35 | 7.50 | 4.00 | 0.60 | 0.20 |
| GPW 196157/1 | 50.00 | 40.00 | 46.43 | 48.80 | 10.00 | 6.35 | 5.00 | 2.50 | 0.40 | 0.20 |
| GPW 216157/1 | 55.00 | 40.00 | 50.37 | 53.65 | 10.50 | 6.35 | 7.50 | 4.00 | 0.60 | 0.20 |
| GPW 248188/1 | 63.00 | 48.00 | 58.40 | 61.65 | 9.50 | 6.35 | 7.50 | 4.00 | 0.60 | 0.20 |
| GPW 248196 | 63.00 | 50.00 | 58.40 | 61.65 | 10.00 | 6.35 | 6.50 | 4.00 | 0.60 | 0.20 |
| GPW 255188 | 65.00 | 48.00 | 60.40 | 63.65 | 12.00 | 6.35 | 8.50 | 4.00 | 0.60 | 0.20 |
| GPW 255196 | 65.00 | 50.00 | 60.40 | 63.65 | 10.00 | 6.35 | 7.50 | 4.00 | 0.60 | 0.20 |
| GPW 275196 | 70.00 | 50.00 | 64.15 | 68.35 | 14.00 | 6.35 | 10.00 | 5.00 | 0.80 | 0.20 |
| GPW 314236 | 80.00 | 60.00 | 74.15 | 78.35 | 14.00 | 6.35 | 10.00 | 5.00 | 0.80 | 0.20 |
| GPW 393314 | 100.00 | 80.00 | 94.15 | 98.35 | 14.00 | 6.35 | 10.00 | 5.00 | 0.80 | 0.20 |
| GPW 433354 | 110.00 | 90.00 | 104.10 | 108.00 | 12.50 | 6.35 | 10.00 | 5.00 | 0.80 | 0.20 |
| GPW 551472 | 142.00 | 120.00 | 134.15 | 138.00 | 12.00 | 6.35 | 10.00 | 5.00 | 0.80 | 0.20 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js 11 | js 10 | js 11 | +0.025 +0.015 | +0.004 -0.000 | Nominal | Min | Max | Max |
|-----------------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|---------|-------|----------------|----------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | L ₁ | L ₂ | S | C | R ₁ | R ₂ |
| GPW 112062 | 1.125 | 0.625 | 0.986 | 1.085 | 0.468 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| GPW 141087 | 1.417 | 0.875 | 1.277 | 1.375 | 0.468 | 0.250 | 0.271 | 0.125 | 0.015 | 0.008 |
| GPW 150100 | 1.500 | 1.000 | 1.360 | 1.450 | 0.375 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| GPW 162100 | 1.625 | 1.000 | 1.445 | 1.575 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 175125 | 1.750 | 1.250 | 1.604 | 1.698 | 0.375 | 0.250 | 0.250 | 0.125 | 0.015 | 0.008 |
| GPW 178116 | 1.786 | 1.161 | 1.606 | 1.735 | 0.468 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 187125/2 | 1.875 | 1.250 | 1.674 | 1.825 | 0.500 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 200137/1 | 2.000 | 1.375 | 1.820 | 1.950 | 0.375 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 212150 | 2.125 | 1.500 | 1.944 | 2.075 | 0.468 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 225162 | 2.250 | 1.625 | 2.070 | 2.200 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 237175 | 2.375 | 1.750 | 2.194 | 2.325 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 262200 | 2.625 | 2.000 | 2.443 | 2.571 | 0.437 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 275200 | 2.750 | 2.000 | 2.522 | 2.695 | 0.437 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| GPW 275200/2 | 2.750 | 2.000 | 2.522 | 2.695 | 0.562 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| GPW 275212 | 2.750 | 2.125 | 2.569 | 2.695 | 0.468 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 300225/1 | 3.000 | 2.250 | 2.772 | 2.935 | 0.500 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| GPW 325262 | 3.250 | 2.625 | 3.069 | 3.195 | 0.562 | 0.250 | 0.312 | 0.156 | 0.025 | 0.008 |
| GPW 350275 | 3.500 | 2.750 | 3.271 | 3.435 | 0.562 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| GPW 362287 | 3.625 | 2.875 | 3.395 | 3.560 | 0.562 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| GPW 400325/1 | 4.000 | 3.250 | 3.770 | 3.935 | 0.562 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| GPW 425350/1 | 4.250 | 3.500 | 4.019 | 4.185 | 0.562 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| GPW 450375 | 4.500 | 3.750 | 4.229 | 4.422 | 0.562 | 0.250 | 0.375 | 0.187 | 0.031 | 0.008 |
| GPW 500400 | 5.000 | 4.000 | 4.733 | 4.920 | 0.750 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| GPW 600500 | 6.000 | 5.000 | 5.726 | 5.920 | 0.750 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |
| GPW 700600 | 7.000 | 6.000 | 6.724 | 6.920 | 0.750 | 0.250 | 0.500 | 0.218 | 0.046 | 0.015 |



Design

CLARON STYLE PW.../L is a precision moulded Nitrile rubber with a fabric reinforced base. Produced with initial radial interference to effect low-pressure sealing, the seal is progressively energised at higher pressures thereby increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, thus reducing friction and wear. The full width polyacetal bearing ring resists extrusion of the seal to allow greater clearances and higher pressures, and provides bearing support for the piston preventing misalignment and metal to metal contact between piston and bore.

Operating Conditions


| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 section for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Pressure Bar

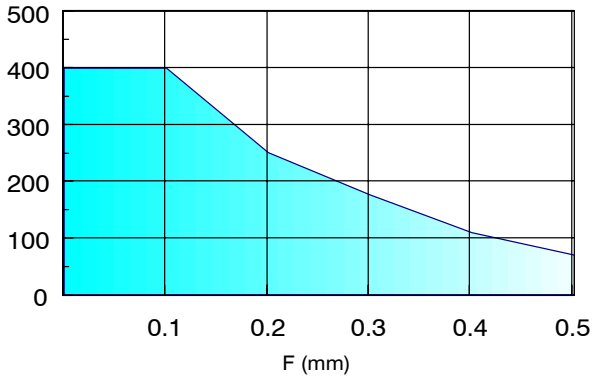

Maximum Diametral Clearance F


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C
The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

Style PW/L is designed to be fitted onto a split piston and may be used with Claron seal retainer Style PSR. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

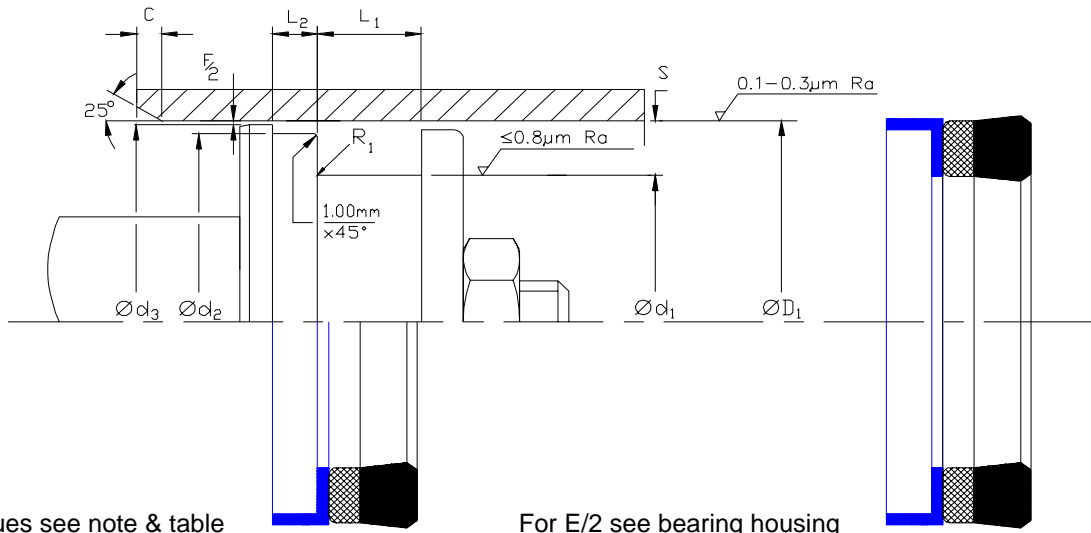

For F/2 values see note & table


For E/2 see bearing housing



ClaronPolyseal®
Single Acting Piston Seal

PW.../L



Imperial



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 10 | js 11 | js 10 | js 11 | +0.025 +0.015 | +0.004 -0.000 | Nominal S | Min C | Max | |
|-----------------------|-----------------|-----------------|-----------------|-----------------|------------------|------------------|--------------|----------|----------------|----------------|
| | ØD ₁ | Ød ₁ | Ød ₂ | Ød ₃ | L ₁ | L ₂ | | | R ₁ | R ₂ |
| PW 100062/L | 1.000 | 0.625 | 0.868 | 0.968 | 0.343 | 0.182 | 0.187 | 0.093 | 0.008 | |
| PW 125075/1L | 1.250 | 0.750 | 1.115 | 1.218 | 0.375 | 0.245 | 0.250 | 0.125 | 0.008 | |
| PW 125075/2L | 1.250 | 0.750 | 1.115 | 1.218 | 0.437 | 0.245 | 0.250 | 0.125 | 0.008 | |
| PW 150100/L | 1.500 | 1.000 | 1.365 | 1.468 | 0.437 | 0.245 | 0.250 | 0.125 | 0.008 | |
| PW 150100/1L | 1.500 | 1.000 | 1.365 | 1.468 | 0.312 | 0.245 | 0.250 | 0.125 | 0.008 | |
| PW 175112/L | 1.750 | 1.125 | 1.552 | 1.687 | 0.531 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 200137/1L | 2.000 | 1.375 | 1.802 | 1.937 | 0.468 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 200137/2L | 2.000 | 1.375 | 1.802 | 1.937 | 0.531 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 200137/3L | 2.000 | 1.375 | 1.802 | 1.937 | 0.593 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 200137/4L | 2.000 | 1.375 | 1.802 | 1.937 | 0.406 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 225162/L | 2.250 | 1.625 | 2.052 | 2.187 | 0.531 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 237175/L | 2.375 | 1.750 | 2.177 | 2.312 | 0.531 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 250187/L | 2.500 | 1.875 | 2.302 | 2.437 | 0.531 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 250187/1L | 2.500 | 1.875 | 2.302 | 2.437 | 0.468 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 250187/3L | 2.500 | 1.875 | 2.302 | 2.437 | 0.406 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 262200/L | 2.625 | 2.000 | 2.428 | 2.562 | 0.531 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 262200/2L | 2.625 | 2.000 | 2.428 | 2.562 | 0.406 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 262200/3L | 2.625 | 2.000 | 2.428 | 2.562 | 0.593 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 275200/L | 2.750 | 2.000 | 2.482 | 2.687 | 0.562 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 275200/2L | 2.750 | 2.000 | 2.482 | 2.687 | 0.687 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 300225/L | 3.000 | 2.250 | 2.732 | 2.937 | 0.500 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 300225/1L | 3.000 | 2.250 | 2.732 | 2.937 | 0.625 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 300225/2L | 3.000 | 2.250 | 2.732 | 2.937 | 0.687 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 325250/L | 3.250 | 2.500 | 2.982 | 3.187 | 0.500 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 325250/1L | 3.250 | 2.500 | 2.982 | 3.187 | 0.687 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 325250/2L | 3.250 | 2.500 | 2.982 | 3.187 | 0.750 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 325250/3L | 3.250 | 2.500 | 2.982 | 3.187 | 0.593 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 350275/L | 3.500 | 2.750 | 3.232 | 3.437 | 0.687 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 350275/1L | 3.500 | 2.750 | 3.232 | 3.437 | 0.500 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 350275/3L | 3.500 | 2.750 | 3.232 | 3.437 | 0.625 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 362300/L | 3.625 | 3.000 | 3.360 | 3.562 | 0.500 | 0.245 | 0.312 | 0.156 | 0.008 | |
| PW 375300/L | 3.750 | 3.000 | 3.482 | 3.687 | 0.687 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 375300/2L | 3.750 | 3.000 | 3.482 | 3.687 | 0.500 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 400325/1L | 4.000 | 3.250 | 3.732 | 3.937 | 0.687 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 425350/1L | 4.250 | 3.500 | 3.985 | 4.187 | 0.687 | 0.245 | 0.375 | 0.187 | 0.008 | |
| PW 450350/1L | 4.500 | 3.500 | 4.232 | 4.437 | 0.687 | 0.370 | 0.500 | 0.218 | 0.015 | |
| PW 450350/2L | 4.500 | 3.500 | 4.232 | 4.437 | .875 | 0.370 | 0.500 | 0.218 | 0.015 | |
| PW 450350/3L | 4.500 | 3.500 | 4.232 | 4.437 | 0.500 | 0.370 | 0.500 | 0.218 | 0.015 | |
| PW 475375/2L | 4.750 | 3.750 | 4.485 | 4.687 | 0.875 | 0.370 | 0.500 | 0.218 | 0.015 | |
| PW 500400/L | 5.000 | 4.000 | 4.732 | 4.937 | 0.875 | 0.370 | 0.500 | 0.218 | 0.015 | |
| PW 550450/L | 5.500 | 4.500 | 5.232 | 5.437 | 0.875 | 0.370 | 0.500 | 0.218 | 0.015 | |
| PW 600500/L | 6.000 | 5.000 | 5.732 | 5.937 | 0.875 | 0.370 | 0.500 | 0.218 | 0.015 | |
| PW 650550/L | 6.500 | 5.500 | 6.232 | 6.437 | 0.875 | 0.370 | 0.500 | 0.218 | 0.015 | |
| PW 700600/L | 7.000 | 6.000 | 6.732 | 6.937 | 0.875 | 0.370 | 0.500 | 0.218 | 0.015 | |

Single Acting Piston Seal Metric
CPU Imperial



Design

The Claron style CPU is a symmetrical profiled lip seal manufactured in a high performance grade of Polyurethane and is suitable for both piston and rod sealing. The sealing lips are machine trimmed to ensure dimensional consistency and good low pressure sealing. Polyurethane exhibits outstanding abrasion and extrusion resistance.


Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 280 Bar | 250 Bar |
| 0.15 | 400 Bar | 350 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Pressure Bar

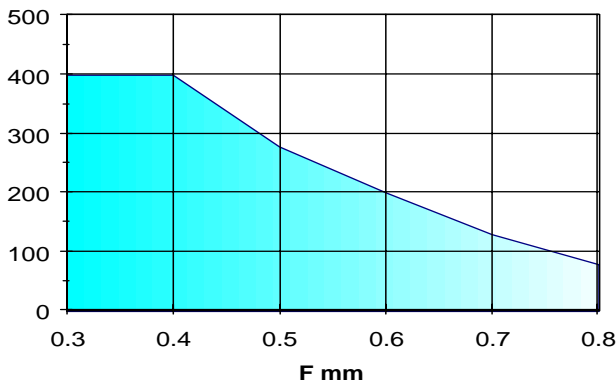

Continuous operating temperature for various Fluids

| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

Maximum Diametral Clearance F


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.



Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols. Refer to section C for rod application.

Fitting



For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

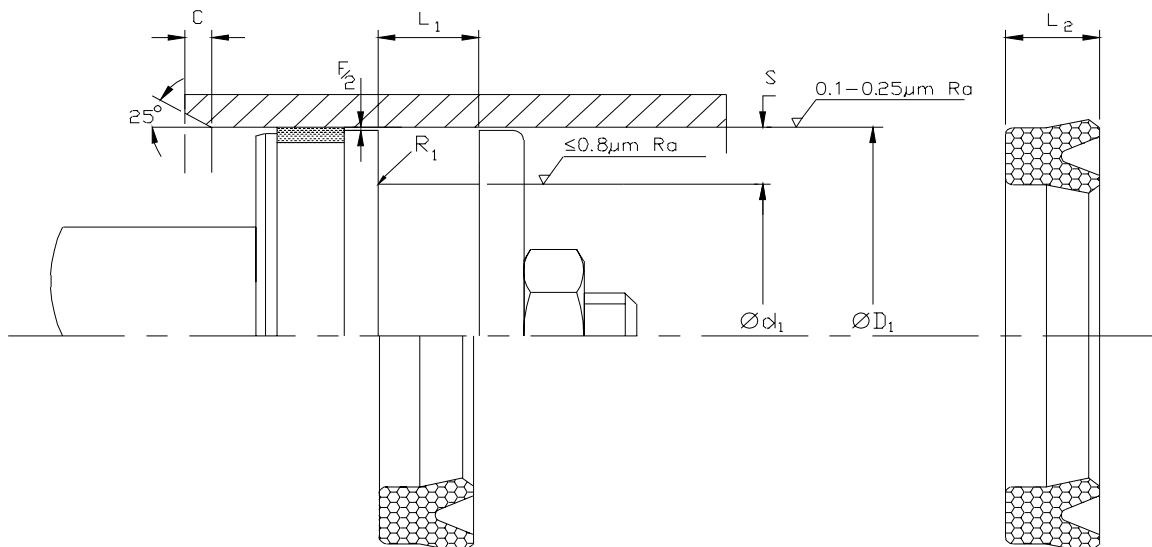

Single Acting Piston Seal Metric
CPU


Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | js11 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----------------|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | L ₂ | S | C | R ₁ |
| CPU 062039 | 16.00 | 10.00 | 5.00 | 4.40 | 4.00 | 3.00 | 0.20 |
| CPU 078047 | 20.00 | 12.00 | 9.00 | 8.40 | 4.00 | 3.00 | 0.20 |
| CPU 078055 | 20.00 | 14.00 | 4.50 | 4.00 | 3.00 | 3.00 | 0.20 |
| CPU 086063 | 22.00 | 16.00 | 5.00 | 4.40 | 3.00 | 3.00 | 0.20 |
| CPU 098055 | 25.00 | 14.00 | 6.10 | 5.50 | 5.50 | 4.00 | 0.30 |
| CPU 098063 | 25.00 | 16.00 | 8.25 | 7.50 | 4.50 | 4.00 | 0.30 |
| CPU 098070 | 25.00 | 18.00 | 6.75 | 6.00 | 3.50 | 3.00 | 0.20 |
| CPU 102063 | 26.00 | 16.00 | 8.75 | 8.00 | 5.00 | 4.00 | 0.30 |
| CPU 102070 | 26.00 | 18.00 | 5.70 | 5.00 | 4.00 | 3.00 | 0.20 |
| CPU 110078 | 28.00 | 20.00 | 7.25 | 6.50 | 4.00 | 3.00 | 0.20 |
| CPU 110078/1 | 28.00 | 20.00 | 5.70 | 5.00 | 4.00 | 3.00 | 0.30 |
| CPU 110086 | 28.00 | 22.00 | 5.50 | 4.50 | 3.00 | 3.00 | 0.20 |
| CPU 118078 | 30.00 | 20.00 | 8.75 | 8.00 | 5.00 | 4.00 | 0.30 |
| CPU 118086 | 30.00 | 22.00 | 6.75 | 6.00 | 4.00 | 3.00 | 0.20 |
| CPU 118088 | 30.00 | 22.40 | 5.70 | 5.00 | 3.80 | 3.00 | 0.30 |
| CPU 129098 | 33.00 | 25.00 | 6.30 | 5.70 | 4.00 | 3.00 | 0.20 |
| CPU 129098/1 | 33.00 | 25.00 | 8.75 | 8.00 | 4.00 | 3.00 | 0.20 |
| CPU 129098/2 | 33.00 | 25.00 | 5.60 | 5.00 | 4.00 | 3.00 | 0.20 |
| CPU 137098 | 35.00 | 25.00 | 8.75 | 8.00 | 5.00 | 4.00 | 0.30 |
| CPU 137098/1 | 35.00 | 25.00 | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 137098/2 | 35.00 | 25.00 | 7.50 | 7.30 | 5.00 | 4.00 | 0.30 |
| CPU 139110 | 35.50 | 28.00 | 5.70 | 5.00 | 3.75 | 3.00 | 0.20 |
| CPU 149098 | 38.00 | 25.00 | 10.75 | 10.00 | 6.50 | 4.00 | 0.30 |
| CPU 157078 | 40.00 | 20.00 | 12.00 | 11.00 | 10.00 | 5.00 | 0.40 |
| CPU 157098 | 40.00 | 25.00 | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 157118 | 40.00 | 30.00 | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 157118/1 | 40.00 | 30.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 163124 | 41.50 | 31.50 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 165118 | 42.00 | 30.00 | 10.75 | 10.00 | 6.00 | 4.00 | 0.30 |
| CPU 165125 | 42.00 | 32.00 | 6.30 | 5.80 | 5.00 | 4.00 | 0.30 |
| CPU 169110 | 43.00 | 28.00 | 11.00 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 173141 | 44.00 | 36.00 | 8.75 | 8.00 | 4.00 | 3.00 | 0.20 |
| CPU 177118 | 45.00 | 30.00 | 10.75 | 10.00 | 7.50 | 5.00 | 0.30 |
| CPU 177137 | 45.00 | 35.00 | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 177137/1 | 45.00 | 35.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 181141 | 46.00 | 36.00 | 8.00 | 7.30 | 5.00 | 4.00 | 0.30 |
| CPU 196118 | 50.00 | 30.00 | 10.75 | 10.00 | 10.00 | 4.00 | 0.30 |
| CPU 196137 | 50.00 | 35.00 | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 196157 | 50.00 | 40.00 | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 196157/2 | 50.00 | 40.00 | 5.75 | 5.00 | 5.00 | 4.00 | 0.30 |
| CPU 196157/3 | 50.00 | 40.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 196165 | 50.00 | 42.00 | 6.30 | 5.80 | 4.00 | 3.00 | 0.20 |
| CPU 216149 | 55.00 | 38.00 | 10.75 | 10.00 | 8.50 | 5.00 | 0.40 |
| CPU 216157 | 55.00 | 40.00 | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 216177/1 | 55.00 | 45.00 | 6.75 | 6.00 | 5.00 | 4.00 | 0.30 |


Single Acting Piston Seal
Metric

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | js11 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----------------|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | L ₂ | S | C | R ₁ |
| CPU 216177 | 55.00 | 45.00 | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 236157 | 60.00 | 40.00 | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 236157/1 | 60.00 | 40.00 | 19.00 | 18.00 | 10.00 | 5.00 | 0.40 |
| CPU 236177 | 60.00 | 45.00 | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU236196 | 60.00 | 50.00 | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 236196/1 | 60.00 | 50.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 248208 | 63.00 | 53.00 | 6.75 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 255177 | 65.00 | 45.00 | 10.75 | 10.00 | 10.00 | 5.00 | 0.40 |
| CPU 255196 | 65.00 | 50.00 | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 255216/2 | 65.00 | 55.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 255216 | 65.00 | 55.00 | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 275196 | 70.00 | 50.00 | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 275196/1 | 70.00 | 50.00 | 10.75 | 10.00 | 10.00 | 5.00 | 0.40 |
| CPU 275196/2 | 70.00 | 50.00 | 19.00 | 18.00 | 10.00 | 5.00 | 0.40 |
| CPU 275236/1 | 70.00 | 60.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 275236 | 70.00 | 60.00 | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 295216 | 75.00 | 55.00 | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 295255 | 75.00 | 65.00 | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 295255/1 | 75.00 | 65.00 | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 295255/2 | 75.00 | 65.00 | 7.50 | 6.50 | 5.00 | 4.00 | 0.30 |
| CPU 307228 | 78.00 | 58.00 | 16.00 | 15.00 | 5.00 | 4.00 | 0.30 |
| CPU 314236 | 80.00 | 60.00 | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 314236/1 | 80.00 | 60.00 | 19.00 | 18.00 | 10.00 | 5.00 | 0.40 |
| CPU 314255 | 80.00 | 65.00 | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 314275/3 | 80.00 | 70.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 314275/1 | 80.00 | 70.00 | 9.00 | 8.00 | 5.00 | 4.00 | 0.30 |
| CPU 314275/2 | 80.00 | 70.00 | 11.00 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 314275 | 80.00 | 70.00 | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 334255 | 85.00 | 65.00 | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 334275 | 85.00 | 70.00 | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 334295 | 85.00 | 75.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 354275 | 90.00 | 70.00 | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 354295 | 90.00 | 75.00 | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 354314/1 | 90.00 | 80.00 | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 354314 | 90.00 | 80.00 | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 374295 | 95.00 | 75.00 | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 374314 | 95.00 | 80.00 | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 393314 | 100.00 | 80.00 | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 393334/1 | 100.00 | 85.00 | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 393334 | 100.00 | 85.00 | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 413334 | 105.00 | 85.00 | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 4133354/1 | 105.00 | 90.00 | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 413354 | 105.00 | 90.00 | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 433354 | 110.00 | 90.00 | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 433374/1 | 110.00 | 95.00 | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |




Claron Polyseal®
Single Acting Piston Seal Metric
CPU




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | js11 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|--------------------|-----------------|-----------------|----------------|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | L ₂ | S | C | R ₁ |
| CPU 433374 | 110.00 | 95.00 | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 452374 | 115.00 | 95.00 | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 452393/1 | 115.00 | 100.00 | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 452393 | 115.00 | 100.00 | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 472393 | 120.00 | 100.00 | 13.00 | 12.00 | 10.00 | 5.20 | 0.60 |
| CPU 492393 | 125.00 | 100.00 | 15.75 | 15.00 | 12.50 | 6.50 | 0.60 |
| CPU492413 | 125.00 | 105.00 | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 492413/1 | 125.00 | 105.00 | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 492433 | 125.00 | 110.00 | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 492440 | 125.00 | 112.00 | 10.00 | 9.00 | 6.50 | 5.00 | 0.30 |
| CPU 492452 | 125.00 | 115.00 | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 511433 | 130.00 | 110.00 | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 551472 | 140.00 | 120.00 | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 551492 | 140.00 | 125.00 | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 570492 | 145.00 | 125.00 | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 590511 | 150.00 | 130.00 | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 590535 | 150.00 | 136.00 | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 610551 | 155.00 | 140.00 | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 629551 | 160.00 | 140.00 | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 629570 | 160.00 | 145.00 | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 669590 | 170.00 | 150.00 | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |





ClaronPolyseal®
Single Acting Piston Seal Imperial
CPU



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H10 | js11 | +0.010 -0.000 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|------------------|----------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | L ₁ | L ₂ | S | C | R ₁ |
| CPU 056031 | 0.562 | 0.312 | 0.275 | 0.250 | 0.125 | 0.093 | 0.016 |
| CPU 100062 | 1.000 | 0.625 | 0.300 | 0.281 | 0.187 | 0.093 | 0.016 |
| CPU 100062/1 | 1.000 | 0.625 | 0.208 | 0.187 | 0.187 | 0.093 | 0.016 |
| CPU 125087 | 1.250 | 0.875 | 0.208 | 0.187 | 0.187 | 0.093 | 0.016 |
| CPU 150100 | 1.500 | 1.000 | 0.275 | 0.250 | 0.250 | 0.125 | 0.032 |
| CPU 162112 | 1.625 | 1.125 | 0.550 | 0.500 | 0.250 | 0.125 | 0.032 |
| CPU 175112 | 1.750 | 1.125 | 0.550 | 0.500 | 0.312 | 0.156 | 0.032 |
| CPU 175125 | 1.750 | 1.250 | 0.312 | 0.280 | 0.250 | 0.125 | 0.032 |
| CPU 175125/1 | 1.750 | 1.250 | 0.395 | 0.375 | 0.250 | 0.125 | 0.032 |
| CPU 187150 | 1.875 | 1.500 | 0.275 | 0.250 | 0.187 | 0.093 | 0.016 |
| CPU 200137 | 2.000 | 1.375 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 200137/1 | 2.000 | 1.375 | 0.520 | 0.500 | 0.312 | 0.156 | 0.032 |
| CPU 225150 | 2.250 | 1.500 | 0.550 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 225162 | 2.250 | 1.625 | 0.457 | 0.437 | 0.312 | 0.156 | 0.032 |
| CPU 237175 | 2.375 | 1.750 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 237175/1 | 2.375 | 1.750 | 0.395 | 0.375 | 0.312 | 0.156 | 0.032 |
| CPU 250150 | 2.500 | 1.500 | 0.665 | 0.625 | 0.500 | 0.156 | 0.032 |
| CPU 250212 | 2.500 | 2.125 | 0.280 | 0.250 | 0.187 | 0.093 | 0.016 |
| CPU 262200 | 2.625 | 2.000 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 262200/1 | 2.625 | 2.000 | 0.340 | 0.312 | 0.312 | 0.156 | 0.032 |
| CPU 262212 | 2.625 | 2.125 | 0.395 | 0.375 | 0.250 | 0.125 | 0.032 |
| CPU 275200 | 2.750 | 2.000 | 0.520 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 287187 | 2.875 | 1.875 | 0.665 | 0.625 | 0.500 | 0.216 | 0.046 |
| CPU 300225 | 3.000 | 2.250 | 0.520 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 300237 | 3.000 | 2.375 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 312250 | 3.125 | 2.500 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 325262 | 3.250 | 2.625 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 337275 | 2.375 | 2.750 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 350250 | 3.500 | 2.500 | 0.730 | 0.687 | 0.500 | 0.216 | 0.046 |
| CPU 350275 | 3.500 | 2.750 | 0.520 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 362300 | 3.625 | 3.000 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 362300/1 | 3.625 | 3.000 | 0.340 | 0.312 | 0.312 | 0.156 | 0.032 |
| CPU 375300 | 3.750 | 3.000 | 0.520 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 387325 | 3.875 | 3.250 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 400300 | 4.000 | 3.000 | 0.730 | 0.687 | 0.500 | 0.216 | 0.046 |
| CPU 412337 | 4.125 | 3.375 | 0.582 | 0.562 | 0.375 | 0.156 | 0.032 |
| CPU 425350 | 4.250 | 3.500 | 0.530 | 0.500 | 0.375 | 0.156 | 0.032 |
| CPU 425362 | 4.250 | 3.625 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 450350 | 4.500 | 3.500 | 0.730 | 0.687 | 0.500 | 0.216 | 0.046 |
| CPU 487425 | 4.875 | 4.250 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 500437 | 5.000 | 4.375 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 525462 | 5.250 | 4.625 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 600537 | 6.000 | 5.375 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 700637 | 7.000 | 6.375 | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |



CPU.../P

Design

The Claron style CPU.../P is an asymmetrical profiled lip seal manufactured in a high performance grade of Polyurethane and is suitable for piston sealing. The sealing lips are machine trimmed to ensure dimensional consistency and good low pressure sealing. Polyurethane exhibits outstanding abrasion and extrusion resistance. The offset lip design allows rapid energization of the seal without excessive axial movement.


Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 280 Bar | 250 Bar |
| 0.15 | 400 Bar | 350 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to appendix 1 for further information.

Maximum Diametral clearance F

Pressure Bar

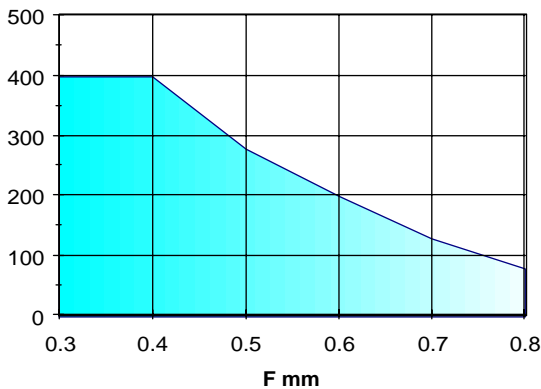

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Continuous operating temperature for various fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting


For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

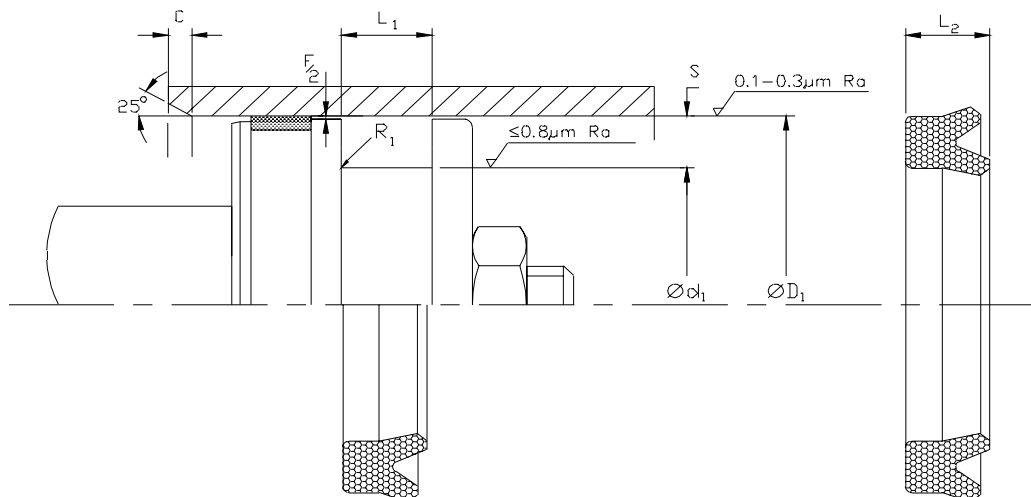



ClaronPolyseal®


Single Acting AU Piston Seal Metric




CPU.../P

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | js11 | +0.25 -0.00 L ₁ | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----------------------------------|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | | L ₂ | S | C | R ₁ |
| CPU 125098/P | 32.00 | 25.00 | 5.00 | 5.60 | 3.50 | 3.00 | 0.20 |
| CPU 196157/P | 50.00 | 40.00 | 7.30 | 8.00 | 5.00 | 3.50 | 0.40 |
| CPU 255216/1P | 65.00 | 55.00 | 7.30 | 8.00 | 16.50 | 3.50 | 0.40 |
| CPU 314185/P | 80.00 | 47.00 | 16.00 | 17.00 | 12.50 | 8.00 | 1.60 |
| CPU 393295/P | 100.00 | 75.00 | 18.00 | 19.00 | 5.00 | 7.00 | 1.20 |



Claron Polyseal® Single Acting Piston Seal FPC



Design

Claron Style FPC single acting piston seal is manufactured from fabric reinforced Nitrile Rubber suitable for mineral based hydraulic oils and water soluble fluids. The Fabric cup is a non preferred design for modern applications, but is available to meet existing design requirement within the industry.

Style FPC may also be used 'back to back' to form a double acting arrangement.

Operating Range

| | |
|--------------------|------------------|
| Temp. range | -30°C to 100°C |
| Max Pressure | 175Bar (2500psi) |
| Linear Speed m/sec | 0.5 |

These Range parameters are Maximum Values
Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.
Refer to Appendix 1 for further information.

Diametrical Clearance 'F' is calculated as the maximum permissible extrusion gap, allowing for movement due to side load, tolerances and cylinder expansion.

| | | | |
|----------------|-----|------|-----|
| Pressure (Bar) | 70 | 140 | 175 |
| Gap F (mm) | 0.5 | 0.45 | 0.4 |

Continuous operating temperature for various Fluids


| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting


It is essential to apply a controlled squeeze to the base of the cup to avoid distortion of the heel and lip.
A location spigot of length L_1 and top plate must be used to avoid excessive wear and premature failure.
For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.
For a detailed checklist, refer to Appendix 3.

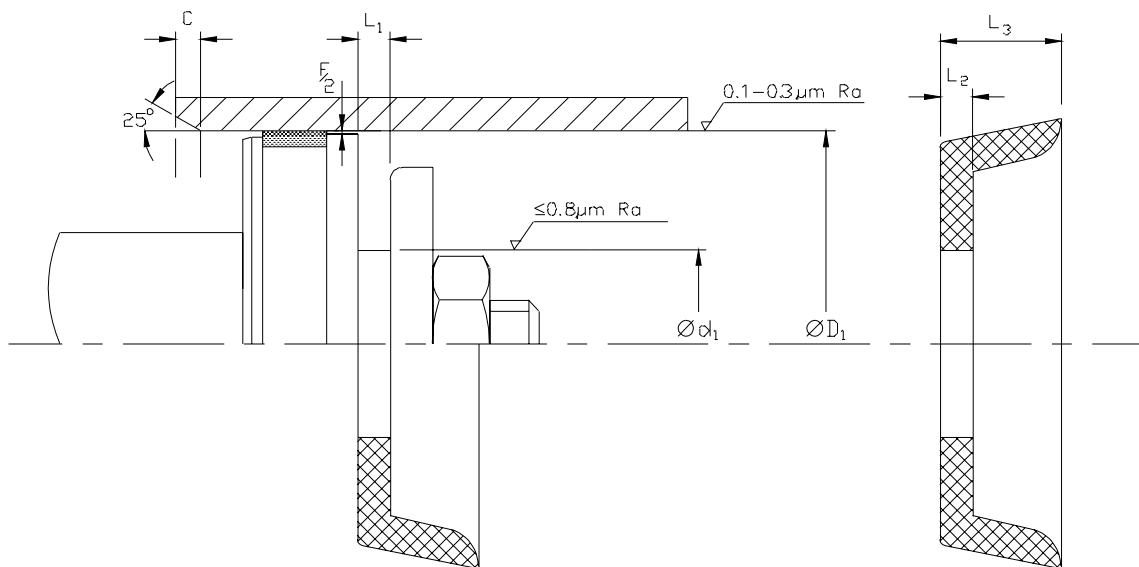



ClaronPolyseal®
Single Acting Piston Seal


Metric




FPC

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 11 | +0.00 | Nom. Depth | Nom. Base | +0.00 | Min |
|-----------------------|-----------------|-----------------|----------------|----------------|----------------|------|
| | ØD ₁ | -0.12 | Fabric Cup | Thickness | -0.12 | C |
| | | Ød ₁ | L ₃ | L ₂ | L ₁ | |
| FPC 157055/RA | 40.00 | 28.00 | 14.00 | 3.00 | 2.70 | 5.00 |
| FPC 236078/FA | 60.00 | 32.00 | 20.00 | 4.76 | 4.36 | 5.50 |
| FPC 275062/2FA | 70.00 | 40.00 | 15.88 | 4.75 | 4.35 | 5.50 |
| FPC 299078/1FA | 76.00 | 17.00 | 20.00 | 4.00 | 3.60 | 5.50 |
| FPC 299078/FA | 76.00 | 38.00 | 20.00 | 4.76 | 4.36 | 5.50 |
| FPC 314075/FA | 80.00 | 50.00 | 19.00 | 4.75 | 4.35 | 5.50 |
| FPC 338078/FA | 86.00 | 17.00 | 20.00 | 4.76 | 4.36 | 5.50 |
| FPC 354075/FA | 90.00 | 25.40 | 19.05 | 4.74 | 4.31 | 6.35 |
| FPC 374078/FA | 95.00 | 17.00 | 20.00 | 4.00 | 3.60 | 6.00 |
| FPC 393050/FA | 100.00 | 70.00 | 12.70 | 4.75 | 4.35 | 5.50 |





ClaronPolyseal®
Single Acting Piston Seal Imperial
FPC



Nominal Dimensions & Machining Tolerances


| Claron Part Number | H 11 | +0.000 -0.005 | Nom. Depth Fabric Cup | Nom. Base Thickness | +0.000 -0.005 | Min |
|-----------------------|-----------------|------------------|--------------------------|------------------------|------------------|-------|
| | ØD ₁ | Ød ₁ | L ₃ | L ₂ | L ₁ | C |
| FPC 062028/FA | 0.625 | 0.250 | 0.281 | 0.093 | 0.085 | 0.187 |
| FPC 062028/FB | 0.625 | 0.180 | 0.281 | 0.093 | 0.085 | 0.187 |
| FPC 100037/FA | 1.000 | 0.375 | 0.375 | 0.093 | 0.085 | 0.187 |
| FPC 125037/FA | 1.250 | 0.250 | 0.375 | 0.125 | 0.115 | 0.187 |
| FPC 137043/FA | 1.375 | 0.562 | 0.437 | 0.125 | 0.115 | 0.187 |
| FPC 137043/FB | 1.375 | 0.687 | 0.437 | 0.125 | 0.115 | 0.187 |
| FPC 150050/FA | 1.500 | 0.250 | 0.500 | 0.125 | 0.115 | 0.187 |
| FPC 150050/FB | 1.500 | 0.875 | 0.500 | 0.125 | 0.115 | 0.187 |
| FPC 162050/FA | 1.625 | 0.375 | 0.500 | 0.125 | 0.115 | 0.187 |
| FPC 162053/FA | 1.625 | 0.405 | 0.531 | 0.156 | 0.140 | 0.187 |
| FPC 162056/FA | 1.625 | 0.500 | 0.562 | 0.156 | 0.140 | 0.187 |
| FPC 168050/FA | 1.687 | 0.687 | 0.500 | 0.125 | 0.115 | 0.187 |
| FPC 175050/FA | 1.750 | 0.375 | 0.500 | 0.125 | 0.115 | 0.187 |
| FPC 175056/FA | 1.750 | 0.405 | 0.562 | 0.187 | 0.170 | 0.187 |
| FPC 175062/3RA | 1.750 | 0.750 | 0.625 | 0.187 | 0.170 | 0.187 |
| FPC 175062/4FA | 1.750 | 1.000 | 0.625 | 0.187 | 0.170 | 0.187 |
| FPC 178062/FA | 1.781 | 16.5mm | 0.625 | 0.187 | 0.170 | 0.187 |
| FPC 200037/FA | 2.000 | 1.125 | 0.375 | 0.125 | 0.115 | 0.187 |
| FPC 200037/FB | 2.000 | 1.250 | 0.375 | 0.125 | 0.115 | 0.187 |
| FPC 200050/FA | 2.000 | 0.375 | 0.500 | 0.125 | 0.115 | 0.187 |
| FPC 200050/RA | 2.000 | 0.750 | 0.500 | 0.141 | 0.131 | 0.187 |
| FPC 200050/RB | 2.000 | 1.250 | 0.500 | 0.141 | 0.131 | 0.187 |
| FPC 200075/2FA | 2.000 | 0.625 | 0.750 | 0.156 | 0.140 | 0.187 |
| FPC 200075/FA | 2.000 | 12.0mm | 0.750 | 0.187 | 0.170 | 0.187 |
| FPC 200081/FA | 2.000 | 0.625 | 0.812 | 0.219 | 0.198 | 0.187 |
| FPC 212062/FA | 2.125 | 0.375 | 0.625 | 0.156 | 0.140 | 0.187 |
| FPC 225050/2FA | 2.250 | 1.250 | 0.500 | 0.156 | 0.140 | 0.218 |
| FPC 225062/FA | 2.50 | 1.312 | 0.625 | 0.156 | 0.140 | 0.218 |
| FPC 225075/1FA | 2.250 | 0.625 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 225075/1FB | 2.250 | 1.000 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 225075/1FC | 2.250 | 1.125 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 237075/1FA | 2.375 | 0.687 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 237075/1FB | 2.375 | 0.750 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 237075/1FC | 2.375 | 0.500 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 237075/1FD | 2.375 | 22.0 mm | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 237075/1FE | 2.375 | 1.250 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 237075/1FSA | 2.375 | 0.875 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 237075/FA | 2.375 | 1.250 | 0.750 | 0.219 | 0.198 | 0.218 |
| FPC 250062/FA | 2.500 | 0.500 | 0.625 | 0.156 | 0.140 | 0.218 |
| FPC 250062/FB | 2.500 | 1.500 | 0.625 | 0.156 | 0.140 | 0.218 |
| FPC 250062/FC | 2.500 | 1.250 | 0.625 | 0.156 | 0.140 | 0.218 |
| FPC 250087/FA | 2.500 | 0.750 | 0.875 | 0.250 | 0.225 | 0.218 |
| FPC 262075/FA | 2.625 | 0.750 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 262075/FB | 2.625 | 22.0mm | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 262075/FC | 2.625 | 0.875 | 0.750 | 0.187 | 0.170 | 0.218 |

FPC




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H 11 | +0.000 -0.005 | Nom. Depth Fabric Cup | Nom. Base Thickness | +0.000 -0.005 | Min |
|--------------------|-----------------|------------------|--------------------------|------------------------|------------------|-------|
| | ØD ₁ | Ød ₁ | L ₃ | L ₂ | L ₁ | C |
| FPC 262075/FD | 2.625 | 1.500 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 262075/FE | 2.625 | 0.500 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 262081/FA | 2.625 | 0.875 | 0.812 | 0.219 | 0.198 | 0.218 |
| FPC 262100/RA | 2.625 | 0.875 | 1.000 | 0.250 | 0.225 | 0.218 |
| FPC 264075/FA | 2.645 | 0.875 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 275062/1FA | 2.750 | 0.687 | 0.625 | 0.187 | 0.170 | 0.218 |
| FPC 275062/FA | 2.750 | 0.687 | 0.625 | 0.219 | 0.198 | 0.218 |
| FPC 275075/FA | 2.750 | 0.500 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 275075/FB | 2.750 | 0.750 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 275075/FC | 2.750 | 0.875 | 0.750 | 0.187 | 0.170 | 0.218 |
| FPC 287062/FA | 2.875 | 1.000 | 0.625 | 0.187 | 0.170 | 0.218 |
| FPC 287087/FA | 2.875 | 1.000 | 0.875 | 0.187 | 0.170 | 0.218 |
| FPC 291062/FA | 2.915 | 1.000 | 0.625 | 0.187 | 0.170 | 0.218 |
| FPC 300062/FA | 3.000 | 0.500 | 0.625 | 0.156 | 0.140 | 0.218 |
| FPC 300062/FB | 3.000 | 0.750 | 0.625 | 0.156 | 0.140 | 0.218 |
| FPC 300062/FC | 3.000 | 1.500 | 0.625 | 0.156 | 0.140 | 0.218 |
| FPC 300062/FD | 3.000 | 1.875 | 0.625 | 0.156 | 0.140 | 0.218 |
| FPC 300075/FA | 3.000 | 0.812 | 0.750 | 0.219 | 0.198 | 0.218 |
| FPC 300075/FB | 3.000 | 0.750 | 0.750 | 0.219 | 0.198 | 0.218 |
| FPC 300075/FC | 3.000 | 1.250 | 0.750 | 0.219 | 0.198 | 0.218 |
| FPC 300081/FA | 3.000 | 1.500 | 0.812 | 0.156 | 0.140 | 0.218 |
| FPC 312075/FA | 3.125 | 22.0mm | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 312075/FB | 3.125 | 0.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 312075/FSA | 3.125 | 0.875 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 325062/FA | 3.250 | 0.687 | 0.625 | 0.219 | 0.198 | 0.250 |
| FPC 325075/1FA | 3.250 | 1.000 | 0.750 | 0.219 | 0.198 | 0.250 |
| FPC 325075/FA | 3.250 | 0.750 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 325075/FB | 3.250 | 22.0mm | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 325075/FC | 3.250 | 0.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 325075/FD | 3.250 | 2.000 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 325081/1FA | 3.250 | 1.250 | 0.812 | 0.250 | 0.225 | 0.250 |
| FPC 325081/FA | 3.250 | 1.000 | 0.812 | 0.219 | 0.198 | 0.250 |
| FPC 325100/2RA | 3.250 | 1.000 | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 328075/FA | 3.280 | 1.000 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 350075/FA | 3.500 | 0.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 350075/FB | 3.500 | 0.750 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 350075/FC | 3.500 | 2.125 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 350087/FA | 3.500 | 1.000 | 0.875 | 0.250 | 0.225 | 0.250 |
| FPC 362050/FA | 3.625 | 2.562 | 0.500 | 0.187 | 0.170 | 0.250 |
| FPC 362068/FA | 3.625 | 2.375 | 0.687 | 0.187 | 0.170 | 0.250 |
| FPC 362068/FB | 3.625 | 0.625 | 0.687 | 0.187 | 0.170 | 0.250 |
| FPC 362075/FA | 3.625 | 0.812 | 0.750 | 0.219 | 0.198 | 0.250 |
| FPC 362075/FB | 3.625 | 1.250 | 0.750 | 0.219 | 0.198 | 0.250 |
| FPC 362075/FC | 3.625 | 1.750 | 0.750 | 0.219 | 0.198 | 0.250 |
| FPC 375062/FA | 3.750 | 0.687 | 0.625 | 0.219 | 0.198 | 0.250 |



ClaronPolyseal®
Single Acting Piston Seal
FPC

Imperial



| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | | |
|--------------------|---|-------------------------------------|--|--|------------------------------------|----------|
| | H 11 ØD ₁ | +0.000 -0.005 Ød ₁ | Nom. Depth Fabric Cup L ₃ | Nom. Base Thickness L ₂ | +0.000 -0.005 L ₁ | Min C |
| FPC 375075/1FA | 3.750 | 0.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 375075/1FB | 3.750 | 0.750 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 375075/FA | 3.750 | 0.625 | 0.750 | 0.250 | 0.225 | 0.250 |
| FPC 387050/FA | 3.875 | 0.750 | 0.500 | 0.150 | 0.135 | 0.250 |
| FPC 387075/FA | 3.875 | 22.0mm | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 387075/FB | 3.875 | 0.750 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 387081/FA | 3.875 | 1.125 | 0.812 | 0.219 | 0.198 | 0.250 |
| FPC 387100/1RA | 3.875 | 1.125 | 1.000 | 0.219 | 0.198 | 0.250 |
| FPC 400075/FA | 4.000 | 0.750 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 400075/FB | 4.000 | 22.0mm | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 400075/FC | 4.000 | 2.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 400075/FD | 4.000 | 0.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 400075/FSA | 4.000 | 0.875 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 400075/RA | 4.000 | 1.000 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 412087/FA | 4.125 | 1.000 | 0.875 | 0.250 | 0.225 | 0.250 |
| FPC 425062/FA | 4.250 | 2.500 | 0.625 | 0.125 | 0.115 | 0.250 |
| FPC 425075/FA | 4.250 | 0.687 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 425075/FB | 4.250 | 0.750 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 450075/FA | 4.500 | 0.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 475081/FA | 4.750 | 1.250 | 0.812 | 0.219 | 0.198 | 0.250 |
| FPC 475100/1RA | 4.750 | 1.250 | 1.000 | 0.219 | 0.198 | 0.250 |
| FPC 475100/FA | 4.750 | 22.0mm | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 500075/FA | 5.000 | 3.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 500075/FB | 5.000 | 0.500 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 500075/FC | 5.000 | 1.500 | 0.750 | 0.250 | 0.225 | 0.250 |
| FPC 500087/FA | 5.000 | 1.000 | 0.875 | 0.250 | 0.225 | 0.250 |
| FPC 500100/FA | 5.000 | 22.0mm | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 500100/FSA | 5.000 | 0.875 | 1.000 | 0.250 | 0.255 | 0.250 |
| FPC 525050/FA | 5.250 | 3.750 | 0.500 | 0.187 | 0.170 | 0.250 |
| FPC 525050/FB | 5.250 | 0.750 | 0.500 | 0.187 | 0.170 | 0.250 |
| FPC 550075/RA | 5.500 | 0.750 | 0.750 | 0.187 | 0.170 | 0.250 |
| FPC 575081/FA | 5.750 | 1.500 | 0.812 | 0.219 | 0.198 | 0.250 |
| FPC 600075/FA | 6.000 | 1.500 | 0.750 | 0.250 | 0.225 | 0.250 |
| FPC 600087/FA | 6.000 | 1.000 | 0.875 | 0.250 | 0.225 | 0.250 |
| FPC 600100/FA | 6.000 | 22.0mm | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 600100/FSA | 6.000 | 0.875 | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 650100/2FA | 6.500 | 4.000 | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 650100/2FB | 6.500 | 4.500 | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 650100/2FC | 6.500 | 0.750 | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 650100/2FD | 6.500 | 1.500 | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 700087/FA | 7.000 | 1.375 | 0.875 | 0.250 | 0.225 | 0.250 |
| FPC 700087/RA | 7.000 | 1.000 | 0.875 | 0.219 | 0.198 | 0.250 |
| FPC 700100/1FA | 7.000 | 2.750 | 1.000 | 0.219 | 0.198 | 0.250 |
| FPC 700100/FA | 7.000 | 22.0mm | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 700100/RA | 7.000 | 2.500 | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 825100/RA | 8.250 | 2.500 | 1.000 | 0.250 | 0.225 | 0.250 |
| FPC 825100/RB | 8.250 | 2.750 | 1.000 | 0.250 | 0.225 | 0.250 |



851

Design

The Claron style 851 is a heavy duty single acting seal for hydraulic or pneumatic piston applications. Designed as a high pressure - low friction seal for use singly, in tandem sealing arrangements or back to back for double acting applications without pressure lock.

Materials

Standard materials are Bronze filled P.T.F.E with a Nitrile O-Ring Energiser but both the outer sealing element and the energiser are available in a wide range of high performance materials to suit a variety of applications. The application parameters should be carefully considered prior to selecting suitable materials from the tables. Consult Claron for further advice.

Operating Range

Temp. -54°C to 200°C (Dependent upon O-Ring Material used See Appendix 2)

Pressure upto 800 bar

Velocity upto 15m/s

These range parameters are maximum conditional values

Optimum service conditions are affected by temperature, speed pressure, surface finish and extrusion gaps..

Refer to Appendix 1 section for further information.


Operating Conditions

Maximum Working Pressure for "Standard" seal applications using specified tolerances.

Temp. range
-30°C to 80°C
400bar

Temp. range
80°C to 120°C
350 bar

Diametrical Clearance F shown in the graph to the right is calculated as the maximum permissible extrusion gap, allowing for movement due to side load, for various pressures and temperatures upto 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the **Radial clearance** to a value nearer to F/2 thus increasing the pressure capability of the seal. The maximum seal extrusion gap should be calculated allowing for all tolerances, movement and cylinder expansion. For pressures > 400 bar, the seal extrusion gap should be reduced by utilising smaller tolerances. e.g H8 for Cylinder bore, f8 for piston diameter.

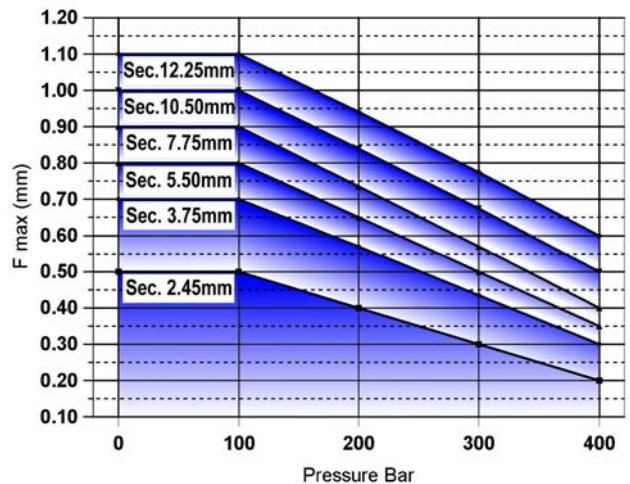

Range Of Installation Dimensions

The full range of diameters applicable to the "Standard", "Light" and "Heavy" Duty Sections shown in the table below

| Housing | | Applicable Bore dia. | | |
|---------|-------|----------------------|-----------------|-----------------|
| Section | Width | Standard Duty | Light Duty (/1) | Heavy Duty (/2) |
| 2.50 | 2.2 | 10 to 16.9 | 17 to 26.9 | |
| 3.75 | 3.2 | 17 to 26.9 | 27 to 59.9 | |
| 5.50 | 4.2 | 27 to 59.9 | 60 to 199.9 | 17 to 26.9 |
| 7.75 | 6.3 | 60 to 199.9 | 200 to 255.9 | 27 to 59.9 |
| 10.50 | 8.1 | 200 to 255.9 | 256 to 280 | 60 to 199.9 |
| 12.25 | 8.1 | 256 to 580 | | 200 to 255.9 |



How To Order


When ordering, prefix the size reference with the style required and use the suffix shown in the material application tables Appendix 2.

- e.g. 851 Standard section in Bronze filled material for 70mm diameter **851-0700/B**
- 851 Light duty section in Glass filled material for 70 mm diameter **851-0700/1G**
- 851 Heavy duty section in Carbon filled material for 70 mm diameter **851-0700/2C**

For O-Ring energiser materials other than Nitrile, use suffix shown in material table. Appendix 2
 e.g. Fluorocarbon material (FKM), **851-0700/B/FKM**

Housing

For surface finish and lead in chamfers refer to the illustration below. For Housing dimensions and tolerances refer to the table of recommended sizes and Appendix 4 for value of tolerance symbols

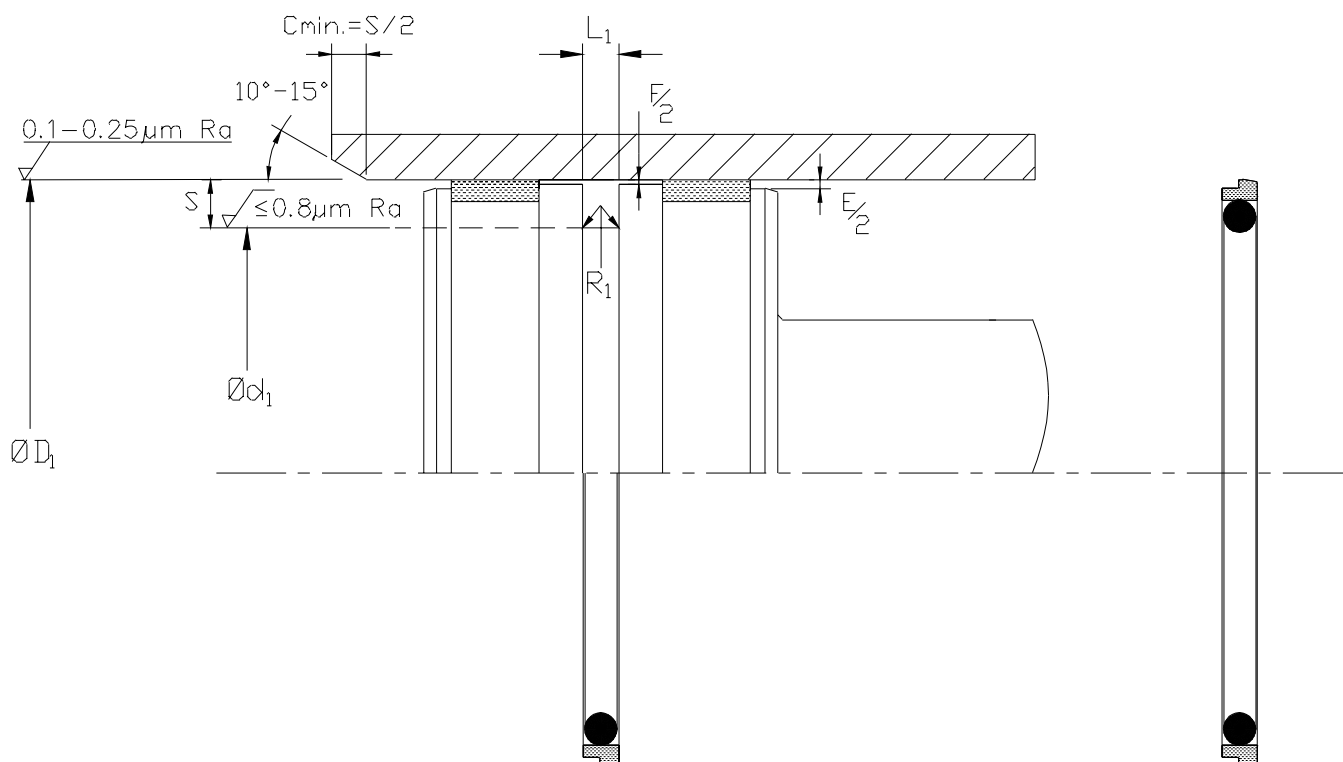

For F/2 values see note & table

For E/2 refer to Guide Tape page

Fitting

For the seal to function correctly it is important that care is taken during fitting.
 For details refer to Appendix 3



851

Nominal Dimensions & Machining Tolerances

Nominal Dimensions & Machining Tolerances

| Claron | D ₁ H9 | d ₁ h9 | L ₁ +0.2 -0.0 | S Nom Sec | R ₁ Max | F/2 Max | Claron | D ₁ H9 | d ₁ h9 | L ₁ +0.2 -0.0 | S Nom Sec | R ₁ Max | F/2 Max |
|--------------------|----------------------|----------------------|--------------------------------|-----------------|-----------------------|------------|--------------------|----------------------|----------------------|--------------------------------|-----------------|-----------------------|------------|
| 851-0100/B | 10.00 | 5.00 | 2.20 | 2.50 | 0.30 | 0.20 | 851-1300/B | 130.00 | 114.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0120/B | 12.00 | 7.00 | 2.20 | 2.50 | 0.30 | 0.20 | 851-1300/2B | 130.00 | 109.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0140/B | 14.00 | 9.00 | 2.20 | 2.50 | 0.30 | 0.20 | 851-1350/B | 135.00 | 119.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0150/B | 15.00 | 10.00 | 2.20 | 2.50 | 0.30 | 0.20 | 851-1350/2B | 135.00 | 114.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0160/B | 16.00 | 11.00 | 2.20 | 2.50 | 0.30 | 0.20 | 851-1400/B | 140.00 | 124.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0180/B | 18.00 | 10.50 | 3.20 | 3.75 | 0.50 | 0.30 | 851-1400/2B | 140.00 | 129.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0200/B | 20.00 | 12.50 | 3.20 | 3.75 | 0.50 | 0.30 | 851-1500/B | 150.00 | 134.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0200/1B | 20.00 | 15.00 | 2.20 | 2.50 | 0.30 | 0.20 | 851-1500/2B | 150.00 | 139.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0220/B | 22.00 | 14.50 | 3.20 | 3.75 | 0.50 | 0.30 | 851-1600/B | 160.00 | 144.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0250/B | 25.00 | 17.50 | 3.20 | 3.75 | 0.50 | 0.30 | 851-1600/2B | 160.00 | 139.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0250/2B | 25.00 | 14.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-1700/B | 170.00 | 154.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0280/B | 28.00 | 17.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-1700/2B | 170.00 | 149.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0300/B | 30.00 | 19.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-1800/B | 180.00 | 164.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0320/B | 32.00 | 21.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-1800/2B | 180.00 | 159.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0320/1B | 32.00 | 24.50 | 3.20 | 3.75 | 0.50 | 0.30 | 851-1900/B | 190.00 | 174.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0350/B | 35.00 | 24.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-1900/2B | 190.00 | 169.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0360/B | 36.00 | 25.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-2000/B | 200.00 | 179.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0381/B | 38.10 | 27.10 | 4.20 | 5.50 | 0.80 | 0.35 | 851-2000/1B | 200.00 | 184.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| 851-0400/B | 40.00 | 29.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-2100/B | 210.00 | 189.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0400/1B | 40.00 | 32.50 | 3.20 | 3.75 | 0.50 | 0.30 | 851-2200/B | 220.00 | 199.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0420/B | 42.00 | 31.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-2300/B | 230.00 | 209.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0450/B | 45.00 | 34.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-2400/B | 240.00 | 219.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0480/B | 48.00 | 37.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-2500/B | 250.00 | 229.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0500/B | 50.00 | 39.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-2500/2B | 250.00 | 225.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0500/2B | 50.00 | 34.50 | 6.30 | 7.75 | 1.20 | 0.40 | 851-2600/B | 260.00 | 235.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0520/B | 52.00 | 41.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-2800/B | 280.00 | 255.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0550/B | 55.00 | 44.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-3000/B | 300.00 | 275.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0600/B | 60.00 | 44.50 | 6.30 | 7.75 | 1.20 | 0.40 | 851-3200/B | 320.00 | 295.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0630/B | 63.00 | 47.50 | 6.30 | 7.75 | 1.20 | 0.40 | 851-3200/1B | 320.00 | 299.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| 851-0630/1B | 63.00 | 52.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-3500/B | 350.00 | 325.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0650/B | 65.00 | 49.50 | 6.30 | 7.75 | 1.20 | 0.40 | 851-3600/B | 360.00 | 335.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0700/B | 70.00 | 54.50 | 6.30 | 7.75 | 1.20 | 0.40 | 851-3800/B | 380.00 | 355.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0700/1B | 70.00 | 59.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-4000/B | 400.00 | 375.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0750/B | 75.00 | 59.50 | 6.30 | 7.75 | 1.20 | 0.40 | 851-4200/B | 420.00 | 395.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0800/B | 80.00 | 64.50 | 6.30 | 7.75 | 1.20 | 0.40 | 851-4500/B | 450.00 | 425.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0800/1B | 80.00 | 69.00 | 4.20 | 5.50 | 0.80 | 0.35 | 851-4800/B | 480.00 | 455.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0850/B | 85.00 | 69.50 | 6.30 | 7.75 | 1.20 | 0.40 | 851-5000/B | 500.00 | 475.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| 851-0850/2B | 85.00 | 64.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |
| 851-0900/B | 90.00 | 74.50 | 6.30 | 7.75 | 1.20 | 0.40 | | | | | | | |
| 851-0900/2B | 90.00 | 69.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |
| 851-0950/B | 95.00 | 79.50 | 6.30 | 7.75 | 1.20 | 0.40 | | | | | | | |
| 851-0950/2B | 95.00 | 74.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |
| 851-1000/B | 100.00 | 84.50 | 6.30 | 7.75 | 1.20 | 0.40 | | | | | | | |
| 851-1000/1B | 100.00 | 89.00 | 4.20 | 5.50 | 0.80 | 0.35 | | | | | | | |
| 851-1000/2B | 100.00 | 89.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |
| 851-1050/B | 105.00 | 89.50 | 6.30 | 7.75 | 1.20 | 0.40 | | | | | | | |
| 851-1050/2B | 105.00 | 84.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |
| 851-1100/B | 110.00 | 94.50 | 6.30 | 7.75 | 1.20 | 0.40 | | | | | | | |
| 851-1100/2B | 110.00 | 89.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |
| 851-1150/B | 115.00 | 99.50 | 6.30 | 7.75 | 1.20 | 0.40 | | | | | | | |
| 851-1150/2B | 115.00 | 94.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |
| 851-1200/B | 120.00 | 104.50 | 6.30 | 7.75 | 1.20 | 0.40 | | | | | | | |
| 851-1200/2B | 120.00 | 99.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |
| 851-1250/B | 125.00 | 109.50 | 6.30 | 7.75 | 1.20 | 0.40 | | | | | | | |
| 851-1250/2B | 125.00 | 104.00 | 8.10 | 10.50 | 1.50 | 0.50 | | | | | | | |

Dimensions in bold type conform to ISO 7425-1 :1988

Intermediate sizes upto 580mm are available, incl. Imperial

Design

Claron Style PSR retainer is designed to retain single acting piston seals. The retainer is manufactured from Acetal (POM) and is profiled to fit into a groove on the piston. The retainer is split with two holes similar to a circlip to facilitate fitting with circlip pliers. The retainer provides a simple housing design solution for all single acting piston seals.

Operating Conditions

Temp. range -30°C to 100°C

Linear Speed m/sec 5

Optimum service conditions are affected by temperature, speed, side load and surface finish. Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids

| POM Polyacetal | | |
|----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | 80 |
| HFD S | Chlorinated hydrocarbon based | 80 |
| HFD T | Mixtures of HFD R and HFD S | 80 |
| HEPG | Polyglycol based | 100 |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 100 |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For seal housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.



Fitting

Style PSR snap fits into a groove and may be fitted with standard circlip pliers. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

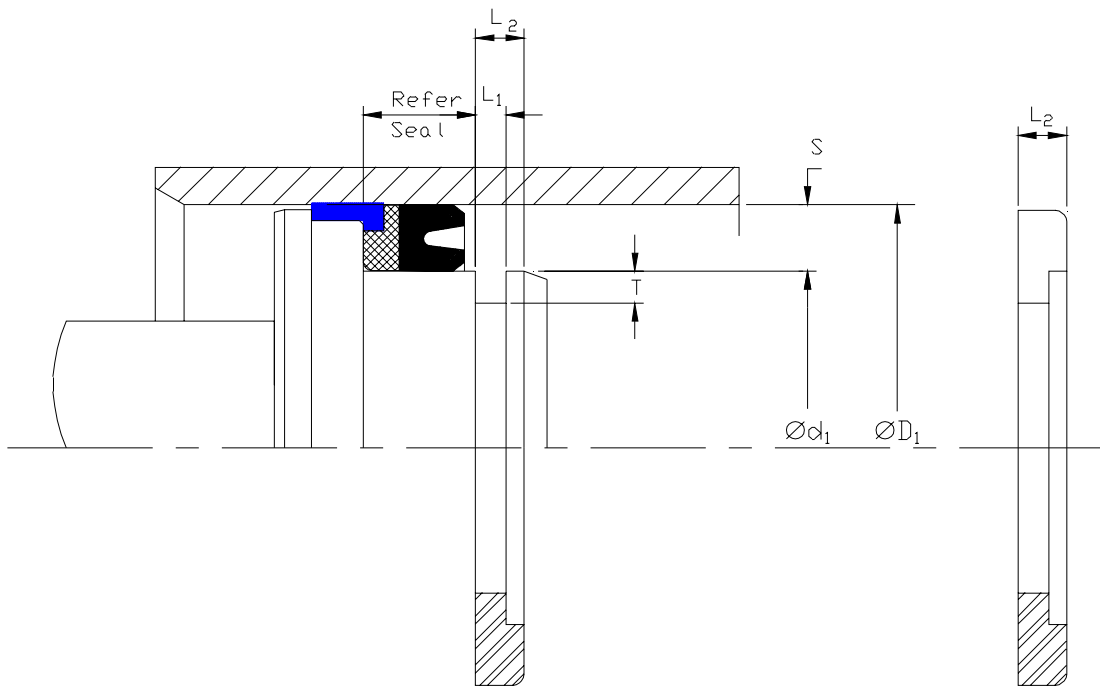

Piston Seal Retaining Ring Metric
PSR




| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | | |
|--------------------|---|-----------------|---------|----------------------------------|---------------------|----------------------------------|
| | Refer to seal section | | Nominal | +0.13 -0.00 L ₁ | +0.00 -0.13 T | +0.13 -0.13 L ₂ |
| | ØD ₁ | Ød ₁ | S | | | |
| PSR 125086 | 32.00 | 22.00 | 5.00 | 2.62 | 2.10 | 5.00 |
| PSR 157110 | 40.00 | 28.00 | 6.00 | 3.12 | 2.10 | 6.00 |
| PSR 196137 | 50.00 | 35.00 | 7.50 | 3.30 | 2.10 | 6.40 |
| PSR 196157 | 50.00 | 40.00 | 5.00 | 2.62 | 2.10 | 5.00 |
| PSR 216157 | 55.00 | 40.00 | 7.50 | 3.30 | 2.10 | 6.40 |
| PSR 248188 | 63.00 | 48.00 | 7.50 | 3.30 | 2.10 | 6.00 |
| PSR 248196 | 63.00 | 50.00 | 6.50 | 3.30 | 2.10 | 6.40 |
| PSR 275196 | 70.00 | 50.00 | 10.00 | 3.30 | 2.10 | 6.40 |
| PSR 314236 | 80.00 | 60.00 | 10.00 | 3.30 | 2.10 | 6.40 |
| PSR 354275 | 90.00 | 70.00 | 10.00 | 3.30 | 2.10 | 6.40 |
| PSR 393314 | 100.00 | 80.00 | 10.00 | 3.30 | 2.10 | 6.40 |
| PSR 411334 | 104.50 | 85.00 | 9.75 | 3.30 | 2.20 | 6.30 |
| PSR 433354 | 110.00 | 90.00 | 10.00 | 3.30 | 2.10 | 6.40 |



ClaronPolyseal®
Piston Seal Retaining Ring Imperial
PSR

Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer to seal section | | Nominal S | +0.005 -0.000 L ₁ | +0.000 -0.005 T | +0.005 -0.005 L ₂ |
|-----------------------|-----------------------|-----------------|--------------|------------------------------------|-----------------------|------------------------------------|
| | ØD ₁ | Ød ₁ | | | | |
| PSR 112062 | 1.125 | 0.625 | 0.250 | 0.098 | 0.082 | 0.187 |
| PSR 141087 | 1.417 | 0.875 | 0.270 | 0.130 | 0.082 | 0.195 |
| PSR 150100 | 1.500 | 1.000 | 0.250 | 0.130 | 0.082 | 0.250 |
| PSR 162100 | 1.625 | 1.000 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 162112 | 1.625 | 1.125 | 0.250 | 0.130 | 0.082 | 0.250 |
| PSR 175125 | 1.750 | 1.250 | 0.250 | 0.130 | 0.082 | 0.250 |
| PSR 178116 | 1.781 | 1.160 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 200137 | 2.000 | 1.375 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 212150 | 2.125 | 1.500 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 225162 | 2.250 | 1.625 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 237175 | 2.375 | 1.750 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 250187 | 2.500 | 1.875 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 262200 | 2.625 | 2.000 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 275200 | 2.750 | 2.000 | 0.375 | 0.130 | 0.082 | 0.250 |
| PSR 275212 | 2.750 | 2.125 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 300225 | 3.000 | 2.250 | 0.375 | 0.130 | 0.082 | 0.250 |
| PSR 312250 | 3.125 | 2.500 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 325250 | 3.250 | 2.500 | 0.375 | 0.130 | 0.082 | 0.250 |
| PSR 325262 | 3.250 | 2.625 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 337275 | 3.375 | 2.750 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 350275 | 3.500 | 2.750 | 0.375 | 0.130 | 0.082 | 0.250 |
| PSR 350287 | 3.500 | 2.875 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 362300 | 3.625 | 3.000 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 387312/1 | 3.875 | 3.125 | 0.375 | 0.190 | 0.110 | 0.312 |
| PSR 400325 | 4.000 | 3.250 | 0.375 | 0.130 | 0.082 | 0.250 |
| PSR 400325/1 | 4.000 | 3.250 | 0.375 | 0.190 | 0.082 | 0.275 |
| PSR 412337 | 4.125 | 3.375 | 0.375 | 0.130 | 0.082 | 0.250 |
| PSR 412350 | 4.125 | 3.500 | 0.312 | 0.130 | 0.082 | 0.250 |
| PSR 450375 | 4.500 | 3.750 | 0.375 | 0.130 | 0.082 | 0.250 |
| PSR 475375 | 4.750 | 3.750 | 0.500 | 0.145 | 0.082 | 0.281 |
| PSR 475400/1 | 4.750 | 4.000 | 0.375 | 0.190 | 0.110 | 0.312 |
| PSR 500400 | 5.000 | 4.000 | 0.500 | 0.145 | 0.082 | 0.281 |
| PSR 575500/1 | 5.750 | 5.000 | 0.375 | 0.190 | 0.110 | 0.312 |
| PSR 675600/1 | 6.750 | 6.000 | 0.375 | 0.190 | 0.110 | 0.312 |
| PSR 875800/1 | 8.750 | 8.000 | 0.375 | 0.190 | 0.110 | 0.312 |

SECTION C Rod SEALS

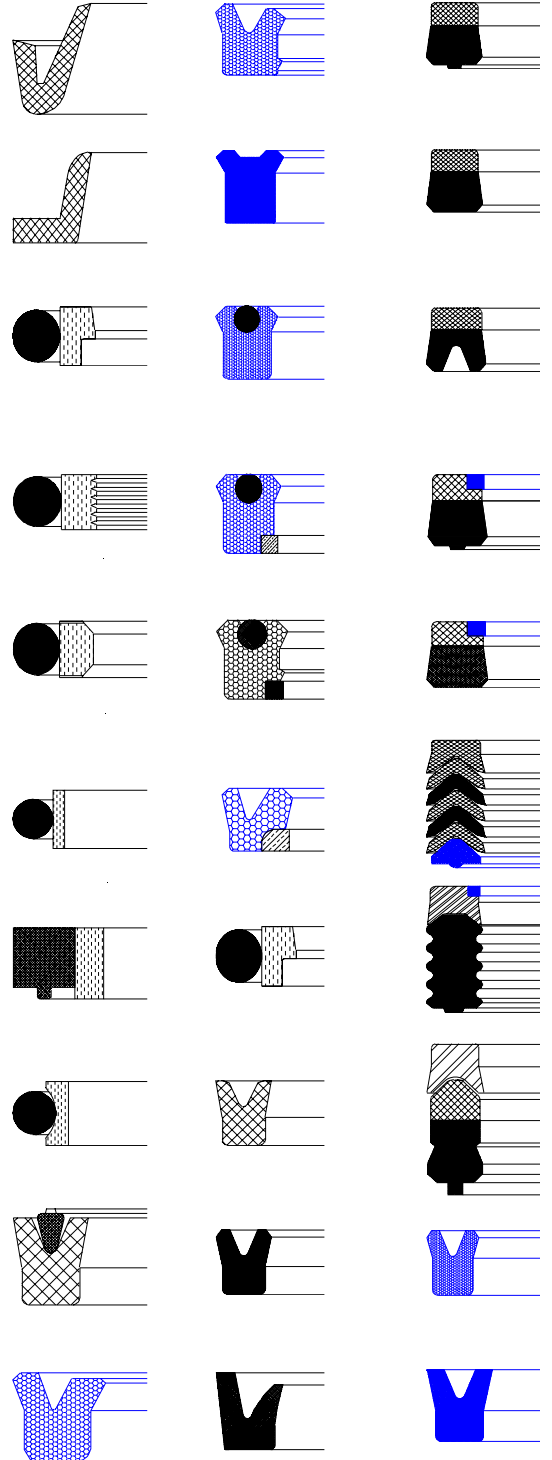



Design

CLARON STYLE CP is designed with a symmetrical profile for use as a single acting rod or piston seal. The seal is a precision moulded Nitrile rubber sealing element with a fabric reinforced base to resist extrusion. Designed with initial radial interference to effect low pressure sealing, at higher pressures the seal is energised thus increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, thus reducing friction and wear. Style CP is produced with radial grooves incorporated into the top of the seal on the pressure side. This innovative design ensures a rapid energisation of the seal without excessive end float and resultant wear.

Operating Conditions


| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

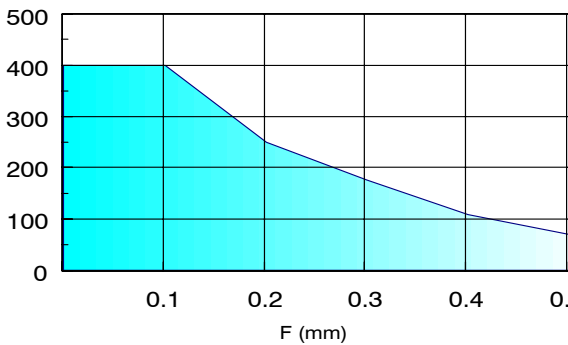

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to appendix 4 for value of tolerance symbols.

For Piston applications refer to section B.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.



For a detailed checklist, refer to Appendix 3.

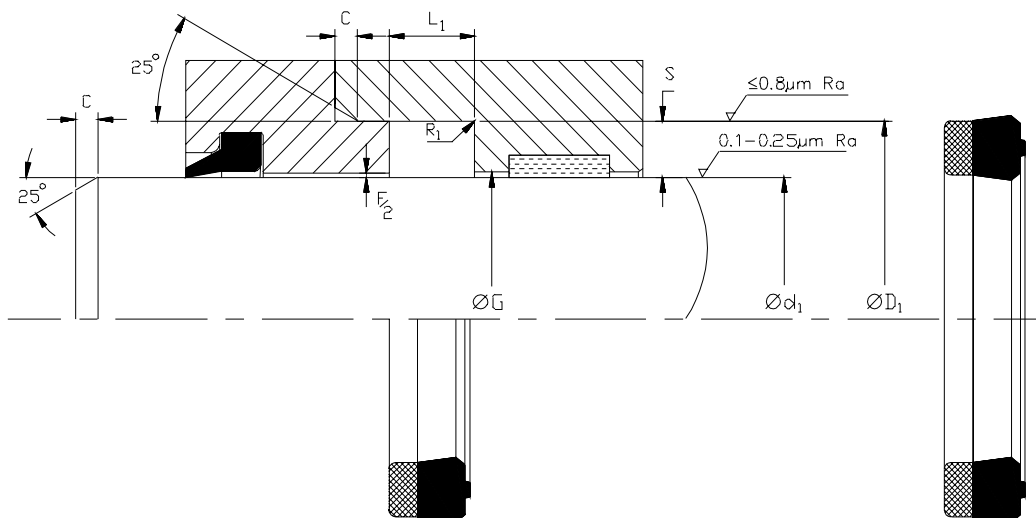

ClaronPolyseal®
Single Acting Rod Seal



CP

Metric





Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 ØD ₁ | f8 Ød ₁ | H9 ØG | L ₁ +0.25 -0.00 | Nominal Sec S | Min C | Max R ₁ |
|-----------------------|--------------------------|-----------------------|----------|----------------------------------|---------------------|----------|-----------------------|
| CP 078047 | 20.00 | 12.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 094063/1 | 24.00 | 16.00 | | 7.50 | 4.00 | 2.00 | 0.20 |
| CP 094063/2 | 24.00 | 16.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 098047 | 25.00 | 12.00 | | 10.00 | 6.50 | 2.50 | 0.40 |
| CP 098070 | 25.00 | 18.00 | | 7.00 | 3.50 | 2.00 | 0.20 |
| CP 102062/1 | 26.00 | 16.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 102066 | 26.00 | 17.00 | | 5.70 | 4.50 | 2.00 | 0.20 |
| CP 102070 | 26.00 | 18.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 102078 | 26.00 | 20.00 | | 5.50 | 3.00 | 1.50 | 0.20 |
| CP 106059 | 27.00 | 15.00 | | 7.00 | 6.00 | 2.50 | 0.40 |
| CP 110070 | 28.00 | 18.00 | | 6.30 | 5.00 | 2.50 | 0.40 |
| CP 110078 | 28.00 | 20.00 | | 7.00 | 4.00 | 2.00 | 0.20 |
| CP 110078/1 | 28.00 | 20.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 114074 | 29.00 | 19.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 118078/1 | 30.00 | 20.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 118086/1 | 30.00 | 22.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 118086/2 | 30.00 | 22.00 | | 7.50 | 4.00 | 2.00 | 0.20 |
| CP 125086 | 32.00 | 22.00 | | 7.50 | 5.00 | 2.50 | 0.40 |
| CP 125094 | 32.00 | 24.00 | | 7.00 | 4.00 | 2.00 | 0.20 |
| CP 129098/1 | 33.00 | 25.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 137098 | 35.00 | 25.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 141110/1 | 36.00 | 28.00 | | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 149110/1 | 38.00 | 28.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 149118 | 38.00 | 30.00 | | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 149118/1 | 38.00 | 30.00 | | 8.50 | 4.00 | 2.00 | 0.20 |
| CP 157118 | 40.00 | 30.00 | | 7.50 | 5.00 | 2.50 | 0.40 |
| CP 157125/1 | 40.00 | 32.00 | | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 165125 | 42.00 | 32.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 169137 | 43.00 | 35.00 | | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 173141 | 44.00 | 36.00 | | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 173141/1 | 44.00 | 36.00 | | 8.50 | 4.00 | 2.00 | 0.20 |
| CP 177118/1 | 45.00 | 30.00 | | 9.00 | 7.50 | 4.00 | 0.80 |
| CP 177137/1 | 45.00 | 35.00 | | 9.00 | 5.00 | 2.50 | 0.40 |
| CP 177137/5 | 45.00 | 35.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 181141/1 | 46.00 | 36.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 181149 | 46.00 | 38.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 185125 | 47.00 | 32.00 | | 11.00 | 7.50 | 4.00 | 0.80 |
| CP 188157 | 48.00 | 40.00 | | 6.40 | 4.00 | 2.00 | 0.20 |
| CP 196137/1 | 50.00 | 35.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 196137/2 | 50.00 | 35.00 | | 11.00 | 7.50 | 4.00 | 0.80 |
| CP 196157 | 50.00 | 40.00 | | 11.00 | 5.00 | 2.50 | 0.40 |
| CP 196157/2 | 50.00 | 40.00 | | 13.50 | 5.00 | 2.50 | 0.40 |
| CP 196157/3 | 50.00 | 40.00 | | 7.50 | 5.00 | 2.50 | 0.40 |
| CP 196165 | 50.00 | 42.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CP 200141 | 51.00 | 36.00 | | 11.50 | 7.50 | 4.00 | 0.80 |





Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.25 -0.00 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| CP 216157/2 | 55.00 | 40.00 | | 11.50 | 7.50 | 4.00 | 0.80 |
| CP 216177 | 55.00 | 45.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 216177/3 | 55.00 | 45.00 | | 10.50 | 5.00 | 2.50 | 0.40 |
| CP 228196 | 58.00 | 50.00 | | 8.50 | 4.00 | 2.00 | 0.20 |
| CP 236177/1 | 60.00 | 45.00 | | 11.50 | 7.50 | 4.00 | 0.80 |
| CP 236196 | 60.00 | 50.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 236196/3 | 60.00 | 50.00 | | 14.50 | 5.00 | 2.50 | 0.40 |
| CP 244196/1 | 62.00 | 50.00 | | 9.50 | 6.00 | 3.00 | 0.40 |
| CP 248188/2 | 63.00 | 48.00 | | 11.00 | 7.50 | 4.00 | 0.80 |
| CP 255196/1 | 65.00 | 50.00 | | 11.00 | 7.50 | 4.00 | 0.80 |
| CP 255216 | 65.00 | 55.00 | | 10.50 | 5.00 | 2.50 | 0.40 |
| CP 255216/1 | 65.00 | 55.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 259220 | 66.00 | 56.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 275196 | 70.00 | 50.00 | | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 275236/3 | 70.00 | 60.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 275236/4 | 70.00 | 60.00 | | 14.50 | 5.00 | 2.50 | 0.40 |
| CP 279220 | 71.00 | 56.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 283236 | 72.00 | 60.00 | | 10.0 | 6.00 | 3.00 | 0.40 |
| CP 283236/2 | 72.00 | 60.00 | | 11.00 | 6.00 | 3.00 | 0.40 |
| CP 295248 | 75.00 | 63.00 | | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 303255 | 77.00 | 65.00 | | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 307248 | 78.00 | 63.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 314236 | 80.00 | 60.00 | | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 314255 | 80.00 | 65.00 | | 11.50 | 7.50 | 4.00 | 0.80 |
| CP 314275/1 | 80.00 | 70.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 314275/3 | 80.00 | 70.00 | | 12.00 | 5.00 | 2.50 | 0.40 |
| CP 322275/1 | 82.00 | 70.00 | | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 322275/2 | 82.00 | 70.00 | | 11.00 | 6.00 | 3.00 | 0.40 |
| CP 334255 | 85.00 | 65.00 | | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 334275 | 85.00 | 70.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 334295/1 | 85.00 | 75.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 342295 | 87.00 | 75.00 | | 9.50 | 6.00 | 3.00 | 0.40 |
| CP 354275/1 | 90.00 | 70.00 | | 10.50 | 10.00 | 5.00 | 0.80 |
| CP 358318 | 91.00 | 81.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 362314 | 92.00 | 80.00 | | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 362314/1 | 92.00 | 80.00 | | 11.00 | 6.00 | 3.00 | 0.40 |
| CP 374295 | 95.00 | 75.00 | | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 374314 | 95.00 | 80.00 | | 13.00 | 7.50 | 4.00 | 0.80 |
| CP 374314/1 | 95.00 | 80.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 374334 | 95.00 | 85.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 393314 | 100.00 | 80.00 | | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 393334 | 100.00 | 85.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 393354 | 100.00 | 90.00 | | 10.50 | 5.00 | 2.50 | 0.40 |
| CP 401354 | 102.00 | 90.00 | | 9.60 | 6.00 | 3.00 | 0.40 |
| CP 413334/1 | 105.00 | 85.00 | | 13.00 | 10.00 | 5.00 | 0.80 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.25 -0.00 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| CP 413354 | 105.00 | 90.00 | | 9.50 | 7.50 | 4.00 | 0.80 |
| CP 413354/1 | 105.00 | 90.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 421374 | 107.00 | 95.00 | | 12.50 | 6.00 | 3.00 | 0.40 |
| CP 433342 | 110.00 | 87.00 | | 8.00 | 11.50 | 5.00 | 0.80 |
| CP 433342/1 | 110.00 | 87.00 | | 18.50 | 11.50 | 5.00 | 0.80 |
| CP 452393/1 | 115.00 | 100.00 | | 12.00 | 7.50 | 4.00 | 0.80 |
| CP 452413 | 115.00 | 105.00 | | 11.00 | 5.00 | 2.50 | 0.40 |
| CP 472393 | 120.00 | 100.00 | | 14.50 | 10.00 | 5.00 | 0.80 |
| CP 492433 | 125.00 | 110.00 | | 12.00 | 7.50 | 4.00 | 0.80 |
| CP 492452 | 125.00 | 115.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 523484 | 133.00 | 123.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CP 590492 | 150.00 | 125.00 | | 14.50 | 12.50 | 6.50 | 1.20 |
| CP 629551/2 | 160.00 | 140.00 | | 12.00 | 10.00 | 5.00 | 0.80 |
| CP 661602 | 168.00 | 153.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CP 669590/1 | 170.00 | 150.00 | | 14.50 | 10.00 | 5.00 | 0.80 |



Design

CLARON STYLE P is designed with a symmetrical profile for use as a single acting Rod or Piston seal. The seal is a precision moulded Nitrile rubber sealing element with a fabric reinforced base to resist extrusion. Designed with initial radial interference to effect low pressure sealing, at higher pressures the seal is energised thus increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, so reducing friction and wear. Style CP is an effective seal over a wide range of applications.


Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

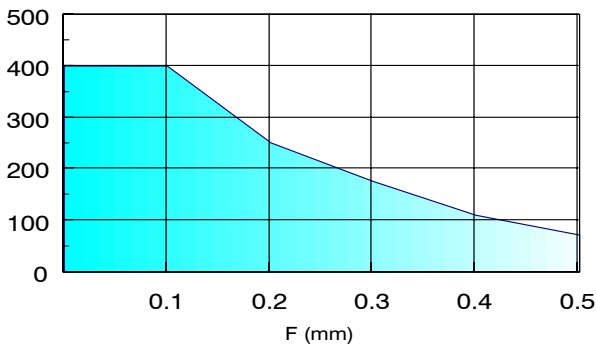

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols. For Piston applications refer to section B.

Fitting



For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

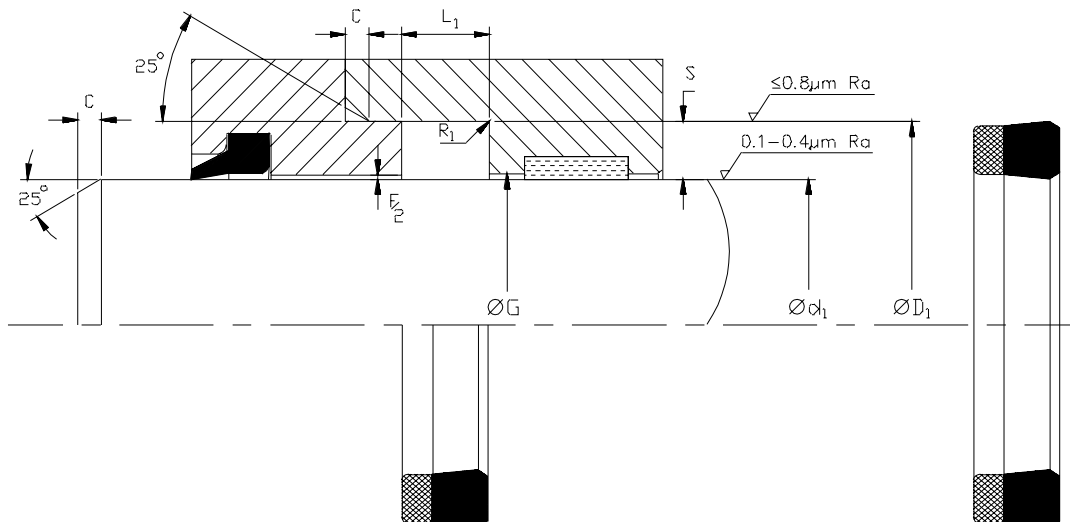





Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js11 | f8 | H9 | +0.025 +0.015 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----|------------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| P 056025 | 0.562 | 0.250 | | 0.250 | 0.156 | 0.093 | 0.010 |
| P 062031 | 0.625 | 0.312 | | 0.250 | 0.156 | 0.093 | 0.010 |
| P 062037 | 0.625 | 0.375 | | 0.187 | 0.125 | 0.093 | 0.010 |
| P 075037 | 0.750 | 0.375 | | 0.281 | 0.187 | 0.093 | 0.010 |
| P 075050 | 0.750 | 0.500 | | 0.187 | 0.125 | 0.093 | 0.010 |
| P 081043 | 0.812 | 0.437 | | 0.281 | 0.187 | 0.093 | 0.010 |
| P 087050 | 0.875 | 0.500 | | 0.281 | 0.187 | 0.093 | 0.010 |
| P 087062 | 0.875 | 0.625 | | 0.187 | 0.125 | 0.093 | 0.010 |
| P 093056 | 0.937 | 0.562 | | 0.281 | 0.187 | 0.093 | 0.010 |
| P 100062 | 1.000 | 0.625 | | 0.281 | 0.187 | 0.093 | 0.010 |
| P 100075 | 1.000 | 0.750 | | 0.187 | 0.125 | 0.093 | 0.010 |
| P 109075 | 1.093 | 0.750 | | 0.281 | 0.171 | 0.093 | 0.010 |
| P 112062 | 1.125 | 0.625 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 112075 | 1.125 | 0.750 | | 0.312 | 0.187 | 0.093 | 0.010 |
| P 112087 | 1.125 | 0.875 | | 0.163 | 0.125 | 0.093 | 0.010 |
| P 118068 | 1.187 | 0.687 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 125075/1 | 1.250 | 0.750 | | 0.312 | 0.250 | 0.125 | 0.015 |
| P 125075/2 | 1.250 | 0.750 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 125087 | 1.250 | 0.875 | | 0.375 | 0.187 | 0.093 | 0.010 |
| P 125100 | 1.250 | 1.000 | | 0.187 | 0.125 | 0.093 | 0.010 |
| P 125100/1 | 1.250 | 1.000 | | 0.121 | 0.125 | 0.093 | 0.010 |
| P 131081 | 1.312 | 0.812 | | 0.375 | 0.250 | 0.250 | 0.015 |
| P 137087 | 1.375 | 0.875 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 137087/1 | 1.375 | 0.875 | | 0.250 | 0.250 | 0.125 | 0.125 |
| P 137100 | 1.375 | 1.000 | | 0.250 | 0.187 | 0.093 | 0.010 |
| P 137112 | 1.375 | 1.125 | | 0.187 | 0.125 | 0.093 | 0.010 |
| P 143093 | 1.437 | 0.937 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 150087 | 1.500 | 0.875 | | 0.375 | 0.312 | 0.156 | 0.015 |
| P 150098 | 1.500 | 0.980 | | 0.380 | 0.260 | 0.125 | 0.015 |
| P 150100 | 1.500 | 1.000 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 150100/1 | 1.500 | 1.000 | | 0.250 | 0.250 | 0.125 | 0.015 |
| P 150125 | 1.500 | 1.250 | | 0.187 | 0.125 | 0.093 | 0.010 |
| P 156112 | 1.562 | 1.125 | | 0.343 | 0.218 | 0.125 | 0.015 |
| P 162100 | 1.625 | 1.000 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 162112 | 1.625 | 1.125 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 162125 | 1.625 | 1.250 | | 0.281 | 0.187 | 0.093 | 0.010 |
| P 162125/1 | 1.625 | 1.250 | | 0.250 | 0.187 | 0.093 | 0.010 |
| P 162125/2 | 1.625 | 1.250 | | 0.500 | 0.187 | 0.093 | 0.010 |
| P 162130 | 1.627 | 1.302 | | 0.240 | 0.162 | 0.093 | 0.010 |
| P 168118/1 | 1.687 | 1.187 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 175100 | 1.750 | 1.000 | | 0.375 | 0.375 | 0.187 | 0.032 |
| P 175112 | 1.750 | 1.125 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 175123 | 1.750 | 1.235 | | 0.340 | 0.257 | 0.125 | 0.015 |
| P 175125 | 1.750 | 1.250 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 175125/1 | 1.750 | 1.250 | | 0.281 | 0.250 | 0.125 | 0.015 |





Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js11 | f8 | H9 | +0.025 +0.015 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----|------------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| P 175125/2 | 1.750 | 1.250 | | 0.250 | 0.250 | 0.125 | 0.015 |
| P 175137 | 1.750 | 1.375 | | 0.281 | 0.187 | 0.093 | 0.010 |
| P 187125 | 1.875 | 1.250 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 187125/1 | 1.875 | 1.250 | | 0.312 | 0.312 | 0.156 | 0.015 |
| P 187125/2 | 1.875 | 1.250 | | 0.500 | 0.312 | 0.156 | 0.015 |
| P 187125/3 | 1.875 | 1.250 | | 0.406 | 0.312 | 0.156 | 0.015 |
| P 187150 | 1.875 | 1.500 | | 0.172 | 0.187 | 0.093 | 0.010 |
| P 187150/1 | 1.875 | 1.500 | | 0.250 | 0.187 | 0.093 | 0.010 |
| P 193168 | 1.937 | 1.687 | | 0.187 | 0.125 | 0.093 | 0.010 |
| P 200137/1 | 2.000 | 1.375 | | 0.375 | 0.312 | 0.156 | 0.015 |
| P 200137/2 | 2.000 | 1.375 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 200137/3 | 2.000 | 1.375 | | 0.500 | 0.312 | 0.156 | 0.015 |
| P 200137/4 | 2.000 | 1.375 | | 0.312 | 0.312 | 0.156 | 0.015 |
| P 200148 | 2.000 | 1.485 | | 0.340 | 0.257 | 0.125 | 0.015 |
| P 200150 | 2.000 | 1.500 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 200150/1 | 2.000 | 1.500 | | 0.468 | 0.250 | 0.125 | 0.015 |
| P 200150/4 | 2.000 | 1.500 | | 0.250 | 0.250 | 0.125 | 0.015 |
| P 200162/2 | 2.000 | 1.625 | | 0.276 | 0.187 | 0.093 | 0.010 |
| P 212150/1 | 2.125 | 1.500 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 212150/2 | 2.125 | 1.500 | | 0.468 | 0.312 | 0.156 | 0.015 |
| P 212175 | 2.125 | 1.750 | | 0.172 | 0.187 | 0.093 | 0.010 |
| P 212175/1 | 2.125 | 1.750 | | 0.300 | 0.187 | 0.093 | 0.010 |
| P 212175/2 | 2.125 | 1.750 | | 0.281 | 0.187 | 0.093 | 0.010 |
| P 218150 | 2.187 | 1.500 | | 0.437 | 0.343 | 0.156 | 0.015 |
| P 225150 | 2.250 | 1.500 | | 0.468 | 0.375 | 0.187 | 0.032 |
| P 225162 | 2.250 | 1.625 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 225175/1 | 2.250 | 1.750 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 225175/2 | 2.250 | 1.750 | | 0.437 | 0.250 | 0.125 | 0.015 |
| P 225187 | 2.250 | 1.875 | | 0.265 | 0.187 | 0.093 | 0.010 |
| P 237175 | 2.375 | 1.750 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 237200 | 2.375 | 2.000 | | 0.172 | 0.187 | 0.093 | 0.010 |
| P 243175 | 2.437 | 1.750 | | 0.437 | 0.343 | 0.156 | 0.015 |
| P 250175 | 2.500 | 1.750 | | 0.500 | 0.375 | 0.156 | 0.015 |
| P 250187 | 2.500 | 1.875 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 250187/1 | 2.500 | 1.875 | | 0.375 | 0.312 | 0.156 | 0.015 |
| P 250187/3 | 2.500 | 1.875 | | 0.312 | 0.312 | 0.156 | 0.015 |
| P 250198 | 2.500 | 1.980 | | 0.360 | 0.260 | 0.125 | 0.015 |
| P 250200 | 2.500 | 2.000 | | 0.312 | 0.250 | 0.125 | 0.015 |
| P 250200/1 | 2.500 | 2.000 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 250200/2 | 2.500 | 2.000 | | 0.343 | 0.250 | 0.125 | 0.015 |
| P 262187 | 2.625 | 1.875 | | 0.625 | 0.375 | 0.187 | 0.032 |
| P 262200 | 2.625 | 2.000 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 262200/2 | 2.625 | 2.000 | | 0.312 | 0.312 | 0.156 | 0.015 |
| P 262200/3 | 2.625 | 2.000 | | 0.500 | 0.312 | 0.156 | 0.015 |
| P 262212 | 2.625 | 2.125 | | 0.375 | 0.250 | 0.125 | 0.015 |



Nominal Dimensions & Machining Tolerances



| Claron Part Number | Js11 | f8 | H9 | +0.025 +0.015 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----|------------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| P 262225 | 2.625 | 2.250 | | 0.172 | 0.187 | 0.093 | 0.010 |
| P 262225/1 | 2.625 | 2.250 | | 0.210 | 0.187 | 0.093 | 0.010 |
| P 275200 | 2.750 | 2.000 | | 0.437 | 0.375 | 0.187 | 0.032 |
| P 275200/1 | 2.750 | 2.000 | | 0.625 | 0.375 | 0.187 | 0.032 |
| P 275200/2 | 2.750 | 2.000 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 275212 | 2.750 | 2.125 | | 0.375 | 0.312 | 0.156 | 0.015 |
| P 275225 | 2.750 | 2.250 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 275231 | 2.750 | 2.312 | | 0.375 | 0.219 | 0.093 | 0.010 |
| P 287200 | 2.875 | 2.000 | | 0.625 | 0.437 | 0.187 | 0.032 |
| P 287212 | 2.875 | 2.125 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 287225 | 2.875 | 2.250 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 287237 | 2.875 | 2.375 | | 0.281 | 0.250 | 0.125 | 0.015 |
| P 300200 | 3.000 | 2.000 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 300212 | 3.000 | 2.125 | | 0.500 | 0.437 | 0.187 | 0.032 |
| P 300225 | 3.000 | 2.250 | | 0.375 | 0.375 | 0.187 | 0.032 |
| P 300225/1 | 3.000 | 2.250 | | 0.500 | 0.375 | 0.187 | 0.032 |
| P 300225/2 | 3.000 | 2.250 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 300237 | 3.000 | 2.375 | | 0.468 | 0.312 | 0.156 | 0.015 |
| P 300250 | 3.000 | 2.500 | | 0.312 | 0.250 | 0.125 | 0.015 |
| P 306250 | 3.062 | 2.500 | | 0.437 | 0.281 | 0.125 | 0.015 |
| P 312237 | 3.125 | 2.375 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 312250 | 3.125 | 2.500 | | 0.625 | 0.312 | 0.156 | 0.015 |
| P 312250/1 | 3.125 | 2.500 | | 0.375 | 0.312 | 0.156 | 0.015 |
| P 325250 | 3.250 | 2.500 | | 0.375 | 0.375 | 0.187 | 0.032 |
| P 325250/1 | 3.250 | 2.500 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 325250/2 | 3.250 | 2.500 | | 0.625 | 0.375 | 0.187 | 0.032 |
| P 325250/3 | 3.250 | 2.500 | | 0.468 | 0.375 | 0.187 | 0.032 |
| P 325262 | 3.250 | 2.625 | | 0.562 | 0.312 | 0.156 | 0.015 |
| P 325273 | 3.250 | 2.735 | | 0.340 | 0.257 | 0.125 | 0.015 |
| P 325275 | 3.250 | 2.750 | | 0.375 | 0.257 | 0.125 | 0.015 |
| P 337262 | 3.375 | 2.625 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 337275/1 | 3.375 | 2.750 | | 0.437 | 0.312 | 0.156 | 0.015 |
| P 350250 | 3.500 | 2.500 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 350275 | 3.500 | 2.750 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 350275/1 | 3.500 | 2.750 | | 0.375 | 0.375 | 0.187 | 0.032 |
| P 350275/3 | 3.500 | 2.750 | | 0.500 | 0.375 | 0.187 | 0.032 |
| P 350287 | 3.500 | 2.875 | | 0.470 | 0.312 | 0.156 | 0.015 |
| P 350300 | 3.500 | 3.000 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 362262 | 3.625 | 2.625 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 362287 | 3.625 | 2.875 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 362300 | 3.625 | 3.000 | | 0.375 | 0.312 | 0.156 | 0.015 |
| P 375275 | 3.750 | 2.750 | | 0.500 | 0.500 | 0.250 | 0.032 |
| P 375300 | 3.750 | 3.000 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 375300/1 | 3.750 | 3.000 | | 0.500 | 0.375 | 0.187 | 0.032 |
| P 375300/2 | 3.750 | 3.000 | | 0.375 | 0.375 | 0.187 | 0.032 |



Nominal Dimensions & Machining Tolerances


| Claron Part Number | Js11 | f8 | H9 | +0.025 +0.015 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----|------------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| P 375323 | 3.750 | 3.230 | | 0.360 | 0.260 | 0.125 | 0.015 |
| P 387287 | 3.875 | 2.875 | | 0.625 | 0.500 | 0.250 | 0.032 |
| P 387312 | 3.875 | 3.125 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 400300 | 4.000 | 3.000 | | 0.625 | 0.500 | 0.250 | 0.032 |
| P 400300/2 | 4.000 | 3.000 | | 0.375 | 0.500 | 0.250 | 0.032 |
| P 400325/1 | 4.000 | 3.250 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 400325/2 | 4.000 | 3.250 | | 0.500 | 0.375 | 0.187 | 0.032 |
| P 400350 | 4.000 | 3.500 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 412337 | 4.125 | 3.375 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 412350 | 4.125 | 3.500 | | 0.375 | 0.312 | 0.156 | 0.015 |
| P 425325 | 4.250 | 3.250 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 425350/1 | 4.250 | 3.500 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 450350/1 | 4.500 | 3.500 | | 0.562 | 0.500 | 0.250 | 0.032 |
| P 450350/2 | 4.500 | 3.500 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 450350/3 | 4.500 | 3.500 | | 0.375 | 0.500 | 0.250 | 0.032 |
| P 450375 | 4.500 | 3.750 | | 0.500 | 0.375 | 0.187 | 0.032 |
| P 450375/1 | 4.500 | 3.750 | | 0.410 | 0.375 | 0.187 | 0.032 |
| P 450400 | 4.500 | 4.000 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 462362 | 4.625 | 3.625 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 462362/1 | 4.625 | 3.625 | | 0.500 | 0.500 | 0.250 | 0.032 |
| P 475375/1 | 4.750 | 3.750 | | 0.812 | 0.500 | 0.250 | 0.032 |
| P 475375/2 | 4.750 | 3.750 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 475425 | 4.750 | 4.250 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 487400 | 4.875 | 4.000 | | 0.656 | 0.437 | 0.187 | 0.032 |
| P 487437 | 4.875 | 4.375 | | 0.375 | 0.250 | 0.125 | 0.032 |
| P 500400 | 5.000 | 4.000 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 500425 | 5.000 | 4.250 | | 0.562 | 0.375 | 0.187 | 0.032 |
| P 525400 | 5.250 | 4.000 | | 0.500 | 0.625 | 0.250 | 0.046 |
| P 525425 | 5.250 | 4.250 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 537437 | 5.375 | 4.375 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 550450 | 5.500 | 4.500 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 550500 | 5.500 | 5.000 | | 0.375 | 0.250 | 0.125 | 0.015 |
| P 575475 | 5.750 | 4.750 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 600500 | 6.000 | 5.000 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 600537 | 6.000 | 5.375 | | 0.375 | 0.312 | 0.156 | 0.015 |
| P 625525/1 | 6.250 | 5.250 | | 0.531 | 0.500 | 0.250 | 0.032 |
| P 625525/3 | 6.250 | 5.250 | | 0.875 | 0.500 | 0.250 | 0.032 |
| P 625550 | 6.250 | 5.500 | | 0.687 | 0.375 | 0.187 | 0.032 |
| P 650550 | 6.500 | 5.500 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 675575 | 6.750 | 5.750 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 700575 | 7.000 | 5.750 | | 0.937 | 0.625 | 0.250 | 0.046 |
| P 700600 | 7.000 | 6.000 | | 0.750 | 0.500 | 0.250 | 0.032 |
| P 700625 | 7.000 | 6.250 | | 0.562 | 0.375 | 0.156 | 0.015 |
| P 775650 | 7.750 | 6.500 | | 1.000 | 0.625 | 0.250 | 0.046 |
| P 800700 | 8.000 | 7.000 | | 0.875 | 0.500 | 0.250 | 0.032 |

Single Acting Rod Seal Imperial
P



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js11 | f8 | H9 | +0.025 +0.015 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----|------------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| P 850725 | 8.500 | 7.250 | | 1.000 | 0.625 | 0.250 | 0.046 |
| P 950837 | 9.500 | 8.375 | | 0.750 | 0.562 | 0.250 | 0.046 |



Design

CLARON STYLE GP is designed with a symmetrical profile for Rod or Piston applications. The seal is a precision moulded Nitrile rubber with a fabric reinforced base to resist extrusion. Designed with initial radial interference to effect low-pressure sealing, the seal is progressively energised at higher pressures thereby increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, thus reducing friction and wear. Style GP is designed to provide effective low pressure sealing through distortion of the lips rather than "squeeze". This gives an improved response to pressure variations and reduces low pressure stiction to ensure a smoother return stroke.


Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

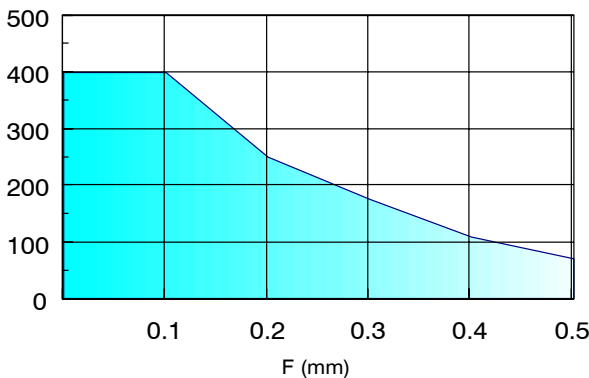

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.



Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols. For Piston applications refer to section B.

Fitting



For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

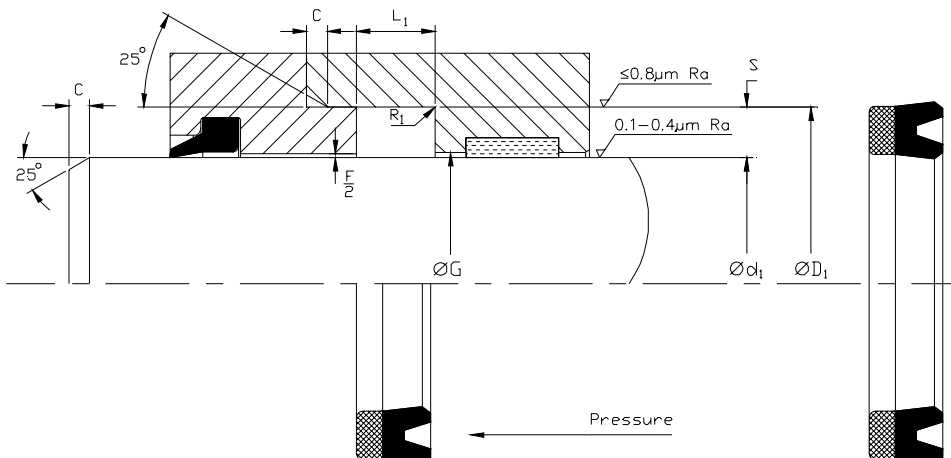




Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.25 -0.00 | Nominal | Min | Max |
|-----------------------|-----------------|-----------------|----|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| GP157118 | 40.00 | 30.00 | | 7.00 | 5.00 | 2.50 | 0.40 |
| GP196157 | 50.00 | 40.00 | | 7.00 | 5.00 | 2.50 | 0.40 |
| GP236196 | 60.00 | 50.00 | | 7.00 | 5.00 | 2.50 | 0.40 |
| GP279220 | 71.00 | 56.00 | | 10.00 | 7.50 | 4.00 | 0.80 |
| GP275236 | 70.00 | 60.00 | | 7.00 | 5.00 | 2.50 | 0.40 |
| GP314236 | 80.00 | 60.00 | | 13.00 | 10.00 | 5.00 | 0.80 |
| GP307248 | 78.00 | 63.00 | | 10.00 | 7.50 | 4.00 | 0.80 |
| GP334275 | 85.00 | 70.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| GP354275 | 90.00 | 70.00 | | 13.00 | 10.00 | 5.00 | 0.80 |
| GP393314 | 100.00 | 80.00 | | 13.00 | 10.00 | 5.00 | 0.80 |
| GP433354 | 110.00 | 90.00 | | 13.00 | 10.00 | 5.00 | 0.80 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.025 +0.015 | Nominal | Min | Max |
|-----------------------|-------------------|-------------------|-----------------|------------------|---------|-------|-------|
| | $\varnothing D_1$ | $\varnothing d_1$ | $\varnothing G$ | L_1 | S | C | R_1 |
| GP 150100 | 1.500 | 1.000 | | 0.375 | 0.250 | 0.125 | 0.015 |
| GP 200150 | 2.000 | 1.500 | | 0.375 | 0.250 | 0.125 | 0.015 |
| GP 200150/1 | 2.000 | 1.500 | | 0.468 | 0.250 | 0.125 | 0.015 |
| GP 212150 | 2.125 | 1.500 | | 0.468 | 0.313 | 0.156 | 0.015 |
| GP 237200/1 | 2.375 | 2.000 | | 0.360 | 0.188 | 0.093 | 0.010 |
| GP 262200/1 | 2.625 | 2.000 | | 0.312 | 0.313 | 0.156 | 0.015 |
| GP 300237 | 3.000 | 2.375 | | 0.312 | 0.313 | 0.156 | 0.015 |
| GP 325250/1 | 3.250 | 2.500 | | 0.562 | 0.375 | 0.187 | 0.032 |



Design

Claron Style CPI is designed for use as a single acting rod seal. The seal is a precision moulded Nitrile rubber sealing element with a fabric reinforced base and an acetal back up ring to resist extrusion. The acetal back up ring allows larger clearances and higher pressures. Designed with initial radial interference to effect low pressure sealing, at higher pressures the seal is progressively energised thus increasing the sealing force. Rubberised fabric has the advantage of retaining fluid within its surface so reducing both friction and wear. Style CP is produced with radial grooves incorporated into the top of the seal on the pressure side. This innovative design ensures a rapid energisation of the seal without excessive end float and resultant wear.

Operating Conditions


| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 section for further information.

Pressure Bar

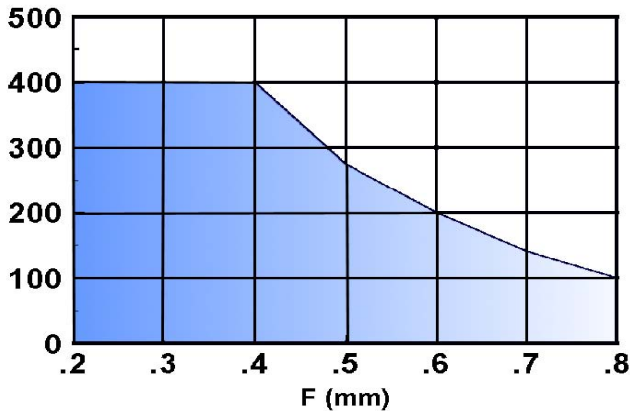

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Maximum Diametral Clearance F


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

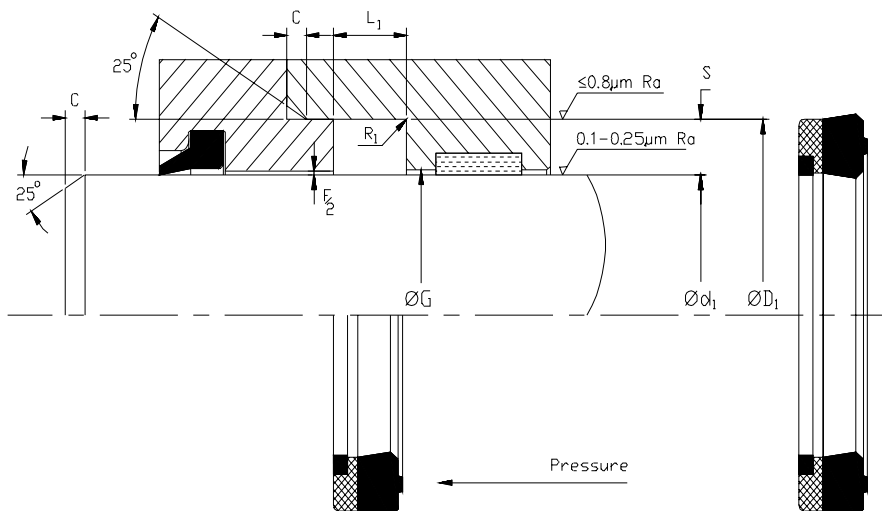





| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | | | |
|-----------------------|---|----------------|----|----------------|---------|------|----------------|
| | Js 11 | f8 | H9 | +0.25 -0.00 | Nominal | Min | Max |
| | ØD ₁ | d ₁ | ØG | L ₁ | S | C | R ₁ |
| CPI 094063 | 24.00 | 16.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CPI 106078 | 27.00 | 20.00 | | 6.40 | 3.50 | 2.00 | 0.20 |
| CPI 110070 | 28.00 | 18.00 | | 6.30 | 5.00 | 2.00 | 0.20 |
| CPI 110078 | 28.00 | 20.00 | | 7.00 | 4.00 | 2.00 | 0.20 |
| CPI 118086 | 30.00 | 22.00 | | 7.00 | 4.00 | 2.00 | 0.20 |
| CPI 129098 | 33.00 | 25.00 | | 7.00 | 4.00 | 2.00 | 0.20 |
| CPI 129098/1 | 33.00 | 25.00 | | 6.30 | 4.00 | 2.00 | 0.20 |
| CPI 129098/2 | 33.00 | 25.00 | | 7.50 | 4.00 | 2.00 | 0.20 |
| CPI 137098 | 35.00 | 25.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CPI 149110 | 38.00 | 28.00 | | 8.50 | 5.00 | 2.50 | 0.40 |
| CPI 149110/1 | 38.00 | 28.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CPI 149118 | 38.00 | 30.00 | | 6.40 | 4.00 | 2.00 | 0.20 |
| CPI 157110 | 40.00 | 28.00 | | 9.00 | 6.00 | 3.00 | 0.40 |
| CPI 157118 | 40.00 | 30.00 | | 7.50 | 5.00 | 2.50 | 0.40 |
| CPI 157125 | 40.00 | 32.00 | | 9.00 | 4.00 | 2.00 | 0.20 |
| CPI 157125/2 | 40.00 | 32.00 | | 8.50 | 4.00 | 2.00 | 0.20 |
| CPI 165125 | 42.00 | 32.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CPI 169141 | 43.00 | 36.00 | | 6.40 | 3.50 | 2.00 | 0.20 |
| CPI 173125 | 44.00 | 32.00 | | 12.00 | 6.00 | 3.00 | 0.40 |
| CPI 177118 | 45.00 | 30.00 | | 9.50 | 7.50 | 4.00 | 0.80 |
| CPI 177137 | 45.00 | 35.00 | | 7.00 | 5.00 | 2.50 | 0.40 |
| CPI 177137/3 | 45.00 | 35.00 | | 10.50 | 5.00 | 2.50 | 0.40 |
| CPI 181141/1 | 46.00 | 36.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CPI 196137/2 | 50.00 | 35.00 | | 11.00 | 7.50 | 4.00 | 0.80 |
| CPI 196157/1 | 50.00 | 40.00 | | 10.50 | 5.00 | 2.50 | 0.40 |
| CPI 196157/2 | 50.00 | 40.00 | | 13.50 | 5.00 | 2.50 | 0.40 |
| CPI 196157/3 | 50.00 | 40.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CPI 216157 | 55.00 | 40.00 | | 8.00 | 7.50 | 4.00 | 0.80 |
| CPI 216157/1 | 55.00 | 40.00 | | 10.50 | 7.50 | 4.00 | 0.80 |
| CPI 216177 | 55.00 | 45.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CPI 216177/1 | 55.00 | 45.00 | | 11.00 | 5.00 | 2.50 | 0.40 |
| CPI 236188/1 | 60.00 | 48.00 | | 11.00 | 6.00 | 3.00 | 0.40 |
| CPI 236196 | 60.00 | 50.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CPI 236196/1 | 60.00 | 50.00 | | 10.50 | 5.00 | 2.50 | 0.40 |
| CPI 236196/3 | 60.00 | 50.00 | | 14.50 | 5.00 | 2.50 | 0.40 |
| CPI 244196/1 | 62.00 | 50.00 | | 9.50 | 6.00 | 3.00 | 0.40 |
| CPI 255196 | 65.00 | 50.00 | | 11.00 | 7.50 | 4.00 | 0.80 |
| CPI 255216 | 65.00 | 55.00 | | 10.50 | 5.00 | 2.50 | 0.40 |
| CPI 259220 | 66.00 | 56.00 | | 10.50 | 5.00 | 2.50 | 0.40 |
| CPI 275216 | 70.00 | 55.00 | | 10.50 | 7.50 | 4.00 | 0.80 |
| CPI 275236 | 70.00 | 60.00 | | 13.00 | 5.00 | 2.50 | 0.40 |
| CPI 275236/3 | 70.00 | 60.00 | | 8.00 | 5.00 | 2.50 | 0.40 |
| CPI 279220 | 71.00 | 56.00 | | 12.50 | 7.50 | 4.00 | 0.80 |
| CPI 295236 | 75.00 | 60.00 | | 13.00 | 7.50 | 4.00 | 0.80 |
| CPI 307248 | 78.00 | 63.00 | | 12.50 | 7.50 | 4.00 | 0.80 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.25 -0.00 | Nominal | Min | Max |
|-----------------------|-----------------|----------------|-------|----------------|---------|------|----------------|
| | ØD ₁ | d ₁ | ØG | L ₁ | S | C | R ₁ |
| CPI 314236 | 80.00 | 60.00 | 14.50 | 10.00 | 5.00 | 0.80 | |
| CPI 314275 | 80.00 | 70.00 | 12.50 | 5.00 | 2.50 | 0.40 | |
| CPI 322275 | 82.00 | 70.00 | 10.50 | 6.00 | 3.00 | 0.40 | |
| CPI 326248 | 83.00 | 63.00 | 14.50 | 10.00 | 5.00 | 0.80 | |
| CPI 334255 | 85.00 | 65.00 | 14.50 | 10.00 | 5.00 | 0.80 | |
| CPI 334275 | 85.00 | 70.00 | 12.50 | 7.50 | 4.00 | 0.80 | |
| CPI 354275 | 90.00 | 70.00 | 14.50 | 10.00 | 5.00 | 0.80 | |
| CPI 374295 | 95.00 | 75.00 | 14.50 | 10.00 | 5.00 | 0.80 | |
| CPI 374314 | 95.00 | 80.00 | 13.00 | 7.50 | 4.00 | 0.80 | |
| CPI 374314/1 | 95.00 | 80.00 | 12.50 | 7.50 | 4.00 | 0.80 | |
| CPI 393314 | 100.00 | 80.00 | 14.50 | 10.00 | 5.00 | 0.80 | |
| CPI 413354/1 | 105.00 | 90.00 | 12.50 | 7.50 | 4.00 | 0.80 | |
| CPI 433354 | 110.00 | 90.00 | 12.50 | 10.00 | 5.00 | 0.80 | |
| CPI 452374 | 115.00 | 95.00 | 14.50 | 10.00 | 5.00 | 0.80 | |
| CPI 452413 | 115.00 | 105.00 | 10.50 | 5.00 | 2.50 | 0.40 | |
| CPI 472393 | 120.00 | 100.00 | 14.50 | 10.00 | 5.00 | 0.80 | |
| CPI 511433 | 130.00 | 110.00 | 12.50 | 10.00 | 5.00 | 0.80 | |
| CPI 551492/1 | 140.00 | 125.00 | 13.00 | 7.50 | 4.00 | 0.80 | |
| CPI 629551 | 160.00 | 140.00 | 12.50 | 10.00 | 5.00 | 0.80 | |
| CPI 669590/1 | 170.00 | 150.00 | 14.50 | 10.00 | 6.00 | 0.80 | |



Design

CLARON STYLE PEI is designed for use as a single acting Rod seal. The seal is a precision moulded Nitrile rubber sealing element with a bonded fabric reinforced base to resist extrusion. Style PEI also has the added benefit of a clip on POM anti-extrusion ring for larger clearances or higher pressures. Designed with initial radial interference to effect low pressure sealing, at higher pressures the seal is progressively energised thus increasing the sealing force. Rubberised fabric has the advantage of retaining the sealing media within it's surface, thus reducing friction and wear. Style PEI is an effective design over a wide range of applications.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |


These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Pressure Bar

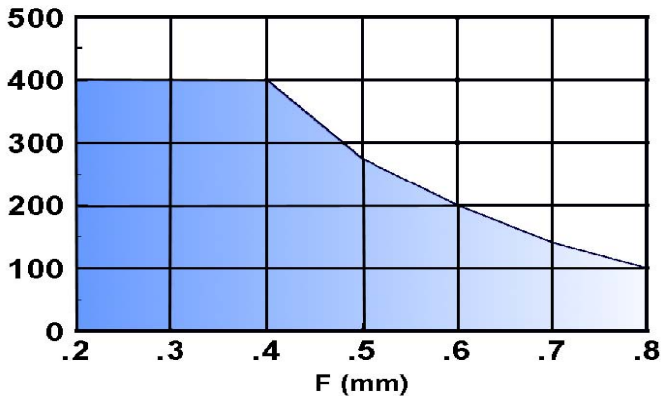

Maximum Diametral Clearance F


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.



Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting



For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

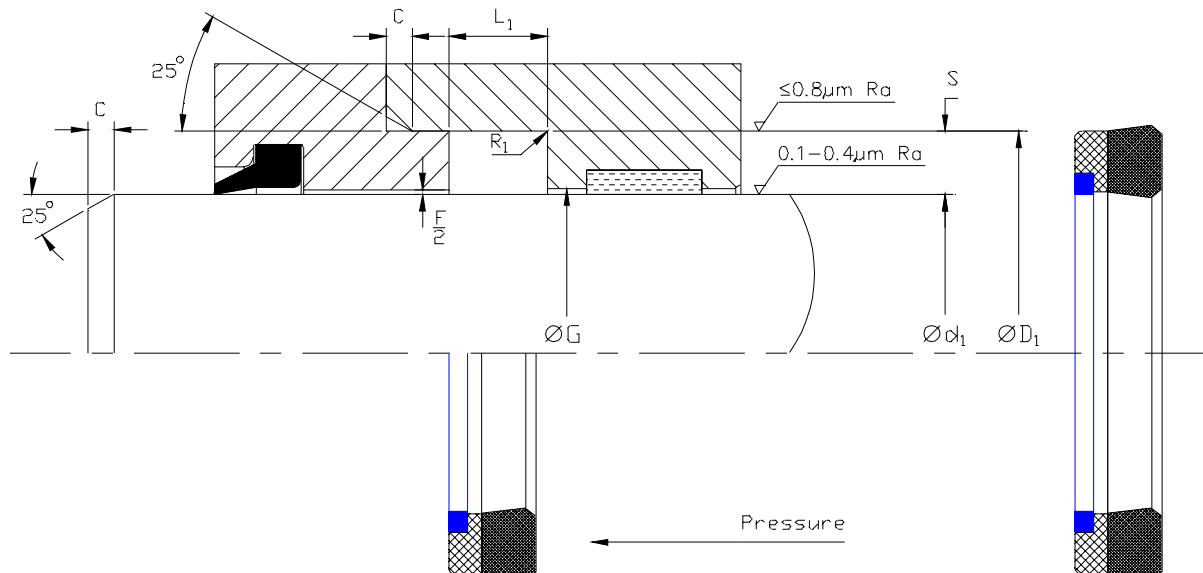




Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.025 -0.015 | Nominal | Min | Max |
|--------------------|-----------------|-----------------|----|------------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ |
| PEI 100062 | 1.000 | 0.625 | | 0.281 | 0.187 | 0.093 | 0.010 |
| PEI 109075 | 1.093 | 0.750 | | 0.281 | 0.171 | 0.093 | 0.010 |
| PEI 112075 | 1.125 | 0.750 | | 0.312 | 0.187 | 0.093 | 0.010 |
| PEI 125075/1 | 1.250 | 0.750 | | 0.312 | 0.250 | 0.125 | 0.015 |
| PEI 125075/2 | 1.250 | 0.750 | | 0.375 | 0.250 | 0.125 | 0.015 |
| PEI 125100 | 1.250 | 1.000 | | 0.187 | 0.125 | 0.093 | 0.010 |
| PEI 137087/1 | 1.375 | 0.875 | | 0.250 | 0.250 | 0.125 | 0.015 |
| PEI 137100 | 1.375 | 1.000 | | 0.250 | 0.187 | 0.093 | 0.010 |
| PEI 137112 | 1.375 | 1.125 | | 0.187 | 0.125 | 0.093 | 0.010 |
| PEI 143093 | 1.437 | 0.937 | | 0.375 | 0.250 | 0.125 | 0.015 |
| PEI 150100 | 1.500 | 1.000 | | 0.375 | 0.250 | 0.125 | 0.015 |
| PEI 150100/1 | 1.500 | 1.000 | | 0.250 | 0.250 | 0.125 | 0.015 |
| PEI 150100/2 | 1.500 | 1.000 | | 0.437 | 0.250 | 0.125 | 0.015 |
| PEI 156112 | 1.562 | 1.125 | | 0.343 | 0.218 | 0.093 | 0.010 |
| PEI 162112 | 1.625 | 1.125 | | 0.375 | 0.250 | 0.125 | 0.015 |
| PEI 162125 | 1.625 | 1.250 | | 0.281 | 0.187 | 0.093 | 0.010 |
| PEI 162125/1 | 1.625 | 1.250 | | 0.250 | 0.187 | 0.093 | 0.010 |
| PEI 175112 | 1.750 | 1.125 | | 0.437 | 0.312 | 0.156 | 0.015 |
| PEI 175125 | 1.750 | 1.250 | | 0.375 | 0.250 | 0.125 | 0.015 |
| PEI 187125 | 1.875 | 1.250 | | 0.437 | 0.312 | 0.156 | 0.015 |
| PEI 187125/2 | 1.875 | 1.250 | | 0.500 | 0.312 | 0.156 | 0.015 |
| PEI 187150/1 | 1.875 | 1.500 | | 0.250 | 0.187 | 0.093 | 0.010 |
| PEI 187150/2 | 1.875 | 1.500 | | 0.281 | 0.187 | 0.093 | 0.010 |
| PEI 200150 | 2.000 | 1.500 | | 0.375 | 0.250 | 0.125 | 0.010 |
| PEI 200150/1 | 2.000 | 1.500 | | 0.468 | 0.250 | 0.125 | 0.010 |
| PEI 200162/1 | 2.000 | 1.625 | | 0.281 | 0.187 | 0.093 | 0.010 |
| PEI 212150/1 | 2.125 | 1.500 | | 0.437 | 0.312 | 0.156 | 0.015 |
| PEI 212175/1 | 2.125 | 1.750 | | 0.300 | 0.187 | 0.093 | 0.010 |
| PEI 212175/2 | 2.125 | 1.750 | | 0.281 | 0.187 | 0.093 | 0.010 |
| PEI 225175/1 | 2.250 | 1.750 | | 0.375 | 0.250 | 0.125 | 0.010 |
| PEI 231200 | 2.312 | 2.000 | | 0.250 | 0.156 | 0.093 | 0.010 |
| PEI 237175 | 2.375 | 1.750 | | 0.437 | 0.312 | 0.156 | 0.015 |
| PEI 237198 | 2.375 | 1.980 | | 0.360 | 0.197 | 0.093 | 0.010 |
| PEI 250175 | 2.500 | 1.750 | | 0.500 | 0.375 | 0.187 | 0.032 |
| PEI 250198 | 2.500 | 1.980 | | 0.360 | 0.260 | 0.125 | 0.010 |
| PEI 250200/1 | 2.500 | 2.000 | | 0.375 | 0.250 | 0.125 | 0.010 |
| PEI 250212 | 2.500 | 2.125 | | 0.312 | 0.187 | 0.093 | 0.010 |
| PEI 262200 | 2.625 | 2.000 | | 0.437 | 0.312 | 0.156 | 0.015 |
| PEI 275200/1 | 2.750 | 2.000 | | 0.625 | 0.375 | 0.187 | 0.032 |
| PEI 275225 | 2.750 | 2.250 | | 0.375 | 0.250 | 0.125 | 0.010 |
| PEI 300250 | 3.000 | 2.500 | | 0.312 | 0.250 | 0.125 | 0.010 |
| PEI 306250 | 3.062 | 2.500 | | 0.437 | 0.281 | 0.125 | 0.010 |
| PEI 325225 | 3.250 | 2.250 | | 0.875 | 0.500 | 0.250 | 0.032 |
| PEI 325250/1 | 3.250 | 2.500 | | 0.562 | 0.375 | 0.187 | 0.032 |
| PEI 350275 | 3.500 | 2.750 | | 0.562 | 0.375 | 0.187 | 0.032 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js11 | f8 | H9 | +0.025 -0.015 | Nominal | Min | Max |
|-----------------------|-------------------|-------------------|-----------------|------------------|---------|-------|-------|
| | $\varnothing D_1$ | $\varnothing d_1$ | $\varnothing G$ | L_1 | S | C | R_1 |
| PEI 375300 | 3.750 | 3.000 | | 0.562 | 0.375 | 0.187 | 0.032 |
| PEI 425348 | 4.250 | 3.480 | | 0.450 | 0.385 | 0.187 | 0.032 |
| PEI 425350/1 | 4.250 | 3.500 | | 0.562 | 0.375 | 0.187 | 0.032 |
| PEI 475400/1 | 4.750 | 4.000 | | 0.687 | 0.375 | 0.187 | 0.032 |
| PEI 500400 | 5.000 | 4.000 | | 0.750 | 0.500 | 0.250 | 0.032 |



Design


Claron Style PV and PVM is a single acting rod or piston seal for medium to heavy duty applications. The assembly consists of a male and female header and a series of 'V' rings. The number of 'V' rings may be varied to alter the assembled height. The material is generally fabric reinforced NBR rubber, although style PVM incorporates an 'NBR only' 'V'-ring to assist low pressure sealing. This is now a non preferred design, but it still has a place in application where difficult conditions prevail such as pressure surges and misalignment.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 400 Bar |
| 0.15 | 700 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Pressure Bar

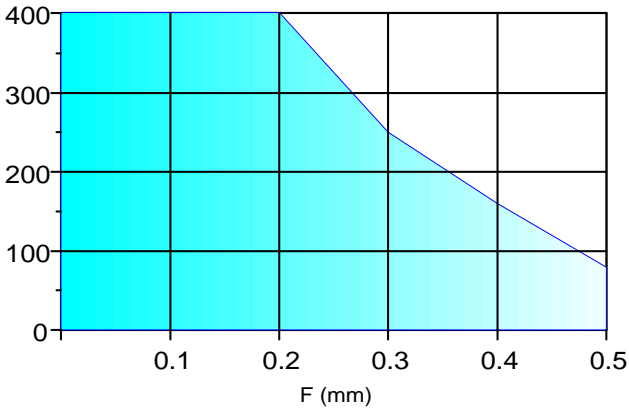

Continuous operating temperature for various fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Maximum Diametral Clearance F

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

Style PV and PVM are designed to be fitted to a split gland or piston. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For installations with spacers use dimensions Y and L2 without spacers use L1



For a detailed checklist, refer to Appendix 3.

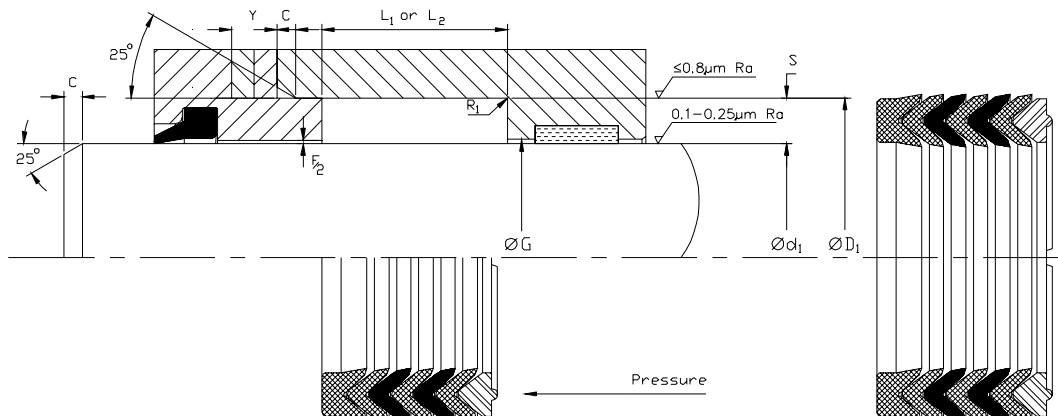





Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | f8 | H9 | +0.20 | L ₂ | Y | Nominal | Min. | Max. | No. of fabric V rings | No. of Rubber V rings |
|--------------------|-----------------|-----------------|------|-------|----------------|------|----------------|------|------|-----------------------|-----------------------|
| | ØD ₁ | Ød ₁ | ØG | -0.00 | | | L ₁ | S | C | | |
| PVM 102062 - A | 26 | 16 | 18.5 | 19.5 | 2.0 | 5.0 | 2.5 | 0.3 | 3 | 2 | |
| PVM 110070 - A | 28 | 18 | 18.5 | 19.5 | 2.0 | 5.0 | 2.5 | 0.3 | 3 | 2 | |
| PVM 118078 - A | 30 | 20 | 18.5 | 19.5 | 2.0 | 5.0 | 2.5 | 0.3 | 3 | 2 | |
| PVM 125078 - A | 32 | 20 | 22.5 | 23.7 | 2.5 | 6.0 | 3.0 | 0.4 | 3 | 2 | |
| PVM 145098 - A | 37 | 25 | 22.5 | 23.7 | 2.0 | 6.0 | 3.0 | 0.4 | 3 | 2 | |
| PVM 145098 - B | 37 | 25 | 22.5 | 23.7 | 2.0 | 6.0 | 3.0 | 0.4 | 5 | 0 | |
| PVM 157098 - A | 40 | 25 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 157110 - A | 40 | 28 | 22.5 | 23.7 | 2.0 | 6.0 | 3.0 | 0.4 | 3 | 2 | |
| PVM 157118 - A | 40 | 30 | 18.5 | 19.5 | 2.0 | 5.0 | 2.5 | 0.3 | 3 | 2 | |
| PVM 165118 - A | 42 | 30 | 22.5 | 23.7 | 2.5 | 5.0 | 3.0 | 0.4 | 3 | 2 | |
| PVM 185125 - A | 47 | 32 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 185125 - B | 47 | 32 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 5 | 0 | |
| PVM 185137 - A | 47 | 35 | 22.5 | 23.7 | 2.0 | 6.0 | 3.0 | 0.4 | 3 | 2 | |
| PVM 185137 - B | 47 | 35 | 22.5 | 23.7 | 2.0 | 6.0 | 3.0 | 0.4 | 5 | 0 | |
| PVM 196137 - A | 50 | 35 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 216157 - B | 55 | 40 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 236177 - A | 60 | 45 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 255196 - B | 65 | 50 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 5 | 0 | |
| PVM 255177 - A | 65 | 45 | 27.5 | 28.2 | 3.5 | 10.0 | 5.0 | 0.6 | 3 | 2 | |
| PVM 255196 - A | 65 | 50 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 275216 - A | 70 | 55 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 295236 - A | 75 | 60 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 314236 - B | 80 | 60 | 37.0 | 38.2 | 3.5 | 10.0 | 5.0 | 0.6 | 3 | 2 | |
| PVM 314255 - A | 80 | 65 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 326248 - A | 83 | 63 | 37.0 | 38.2 | 3.5 | 10.0 | 5.0 | 0.6 | 3 | 3 | |
| PVM 334275 - A | 85 | 70 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 334275 - B | 85 | 70 | 16.5 | 17.5 | 2.5 | 7.5 | 4.0 | 0.4 | 2 | 1 | |
| PVM 354275 - C | 90 | 70 | 40.0 | 41.2 | 3.5 | 10.0 | 5.0 | 0.6 | 3 | 2 | |
| PVM 354295 - A | 90 | 75 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 374314 - A | 95 | 80 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 393314 - D | 100 | 80 | 40.0 | 41.2 | 3.5 | 10.0 | 5.0 | 0.6 | 3 | 2 | |
| PVM 393334 - A | 100 | 85 | 22.5 | 22.2 | 3.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 433354 - D | 110 | 90 | 21.0 | 23.7 | 2.5 | 10.0 | 5.0 | 0.6 | 1 | 0 | |
| PVM 413354 - A | 105 | 90 | 22.5 | 23.7 | 2.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | |
| PVM 433354 - E | 110 | 90 | 40.0 | 41.2 | 3.5 | 10.0 | 5.0 | 0.6 | 3 | 2 | |
| PVM 433354 - C | 110 | 90 | 40.0 | 41.2 | 3.5 | 10.0 | 5.0 | 0.6 | 4 | 1 | |
| PVM 472393 - A | 120 | 100 | 40.0 | 41.2 | 3.5 | 10.0 | 5.0 | 0.6 | 4 | 1 | |
| PVM 472393 - C | 120 | 100 | 40.0 | 41.2 | 3.5 | 10.0 | 5.0 | 0.6 | 4 | 1 | |




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | f9 | H9 | +0.20 -0.00 | Nominal | Min. | Max. | No. of fabric V rings | No. of Rubber V rings | Effective depth of single Fabric V |
|--------------------|-----------------|-----------------|----|----------------|---------|------|----------------|-----------------------|-----------------------|------------------------------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ | | | |
| PV 094055-A | 24.0 | 14.0 | | 16.0 | 4.0 | 2.0 | 0.4 | 3 | - | 2.50 |
| PV 171108-A | 43.5 | 27.5 | | 18.25 | 8.0 | 4.0 | 0.4 | 1 | - | 4.73 |
| PV 196137-B | 50.0 | 35.0 | | 22.0 | 7.5 | 4.0 | 0.4 | 4 | - | 3.00 |
| PV 196157-A | 50.0 | 40.0 | | 19.05 | 5.0 | 2.5 | 0.4 | 2 | - | 4.50 |
| PV 196157-B | 50.0 | 40.0 | | 23.0 | 5.0 | 2.5 | 0.4 | 3 | - | 4.50 |
| PV 216157-A | 55.0 | 40.0 | | 22.5 | 7.5 | 4.0 | 0.4 | 3 | - | 4.70 |
| PV 216157-C | 55.0 | 40.0 | | 27.8 | 7.5 | 4.0 | 0.4 | 3 | 1 | 4.70 |
| PV 216157-D | 55.0 | 40.0 | | 10.5 | 7.5 | 4.0 | 0.4 | 1 | - | 4.70 |
| PV 236157-A | 60.0 | 40.0 | | 30.0 | 10.0 | 5.0 | 0.4 | 3 | - | 4.00 |
| PV 240177-A | 61.0 | 45.0 | | 31.0 | 8.0 | 4.0 | 0.4 | 3 | - | 4.44 |
| PV 240177-B | 61.0 | 45.0 | | 31.0 | 8.0 | 4.0 | 0.4 | 2 | 1 | 4.44 |
| PV 255177-A | 65.0 | 45.0 | | 27.5 | 10.0 | 5.0 | 0.4 | 3 | 2 | 3.80 |
| PV 255177-B | 65.0 | 45.0 | | 27.0 | 10.0 | 5.0 | 0.4 | - | 5 | 3.50 |
| PV 263196-A | 67.0 | 50.0 | | 27.1 | 8.5 | 4.0 | 0.4 | 2 | 1 | 4.70 |
| PV 275196-A | 70.0 | 50.0 | | 30.0 | 10.0 | 5.0 | 0.4 | 2 | - | 6.70 |
| PV 275196-B | 70.0 | 50.0 | | 35.0 | 10.0 | 5.0 | 0.4 | 3 | - | 6.70 |
| PV 295216-A | 75.0 | 55.0 | | 26.0 | 10.0 | 5.0 | 0.4 | 3 | - | 5.20 |
| PV 311236-A | 79.0 | 60.0 | | 31.5 | 9.5 | 5.0 | 0.4 | 2 | 1 | 7.00 |
| PV 314236-A | 80.0 | 60.0 | | 26.0 | 10.0 | 5.0 | 0.4 | 3 | - | 5.10 |
| PV 314236-B | 80.0 | 60.0 | | 37.0 | 10.0 | 5.0 | 0.4 | 3 | 2 | 5.10 |
| PV 314236-C | 80.0 | 60.0 | | 31.0 | 10.0 | 5.0 | 0.4 | 4 | - | 5.10 |
| PV 314236-D | 80.0 | 60.0 | | 37.0 | 10.0 | 5.0 | 0.4 | 4 | - | 5.10 |
| PV 334255-A | 85.0 | 65.0 | | 30.0 | 10.0 | 5.0 | 0.4 | 3 | - | 4.00 |
| PV 350275-B | 89.0 | 70.0 | | 23.0 | 9.5 | 5.0 | 0.4 | 2 | 1 | 5.10 |
| PV 354275-A | 90.0 | 70.0 | | 40.0 | 10.0 | 5.0 | 0.4 | 4 | - | 7.30 |
| PV 354275-B | 90.0 | 70.0 | | 32.5 | 10.0 | 5.0 | 0.4 | 3 | 2 | 3.50 |
| PV 354275-D | 90.0 | 70.0 | | 30.0 | 10.0 | 5.0 | 0.4 | 3 | - | 5.00 |
| PV 374295-A | 95.0 | 75.0 | | 30.0 | 10.0 | 5.0 | 0.4 | 3 | - | 4.00 |
| PV 374314-B | 95.0 | 80.0 | | 26.5 | 7.5 | 4.0 | 0.4 | 3 | 2 | 2.80 |
| PV 393314-A | 100.0 | 80.0 | | 31.5 | 10.0 | 5.0 | 0.4 | 2 | 1 | 5.25 |
| PV 393314-B | 100.0 | 80.0 | | 41.5 | 10.0 | 5.0 | 0.4 | 3 | 2 | 5.25 |
| PV 393314-C | 100.0 | 80.0 | | 21.0 | 10.0 | 5.0 | 0.4 | 1 | - | 5.25 |
| PV 397342-A | 101.0 | 87.0 | | 30.0 | 7.0 | 4.0 | 0.4 | 3 | 2 | 4.00 |
| PV 433354-A | 110.0 | 90.0 | | 30.0 | 10.0 | 5.0 | 0.4 | 3 | - | 5.00 |
| PV 433354-B | 110.0 | 90.0 | | 31.7 | 10.0 | 5.0 | 0.4 | 3 | - | 5.00 |
| PV 433354-D | 110.0 | 90.0 | | 21.0 | 10.0 | 5.0 | 0.4 | 1 | - | 5.00 |
| PV 492393-A | 125.0 | 100.0 | | 27.5 | 12.5 | 6.5 | 1.2 | 3 | - | 3.50 |
| PV 507452-A | 129.0 | 115.0 | | 30.0 | 7.0 | 4.0 | 0.4 | 3 | 2 | 4.00 |
| PV 551472-A | 140.0 | 120.0 | | 30.0 | 10.0 | 5.0 | 0.4 | 3 | - | 4.50 |
| PV 551472-B | 140.0 | 120.0 | | 35.0 | 10.0 | 5.0 | 0.4 | 4 | - | 4.50 |
| PV 551492-A | 140.0 | 125.0 | | 24.0 | 7.5 | 4.0 | 0.4 | 3 | - | 3.75 |
| PV1083964-A | 275.0 | 245.0 | | 58.0 | 15.0 | 7.5 | 0.8 | 5 | - | 7.50 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | f9 | H9 | +0.010 -0.000 | Nominal | Min. | Max. | No. of fabric V rings | No. of Rubber V rings | Effective depth of single Fabric V |
|--------------------|-----------------|-----------------|----|------------------|---------|-------|----------------|-----------------------|-----------------------|------------------------------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ | | | |
| PV 090050-A | 0.906 | 0.500 | | 0.531 | 0.203 | 0.093 | 0.010 | 3 | - | 0.110 |
| PV 095062-A | 0.950 | 0.625 | | 0.531 | 0.167 | 0.093 | 0.010 | 3 | - | 0.110 |
| PV 110075-A | 1.100 | 0.750 | | 0.531 | 0.175 | 0.093 | 0.010 | 2 | - | 0.110 |
| PV 110075-B | 1.100 | 0.750 | | 0.640 | 0.175 | 0.093 | 0.010 | 3 | - | 0.110 |
| PV 125087-A | 1.250 | 0.875 | | 0.657 | 0.187 | 0.093 | 0.010 | 3 | - | 0.100 |
| PV 131081-A | 1.312 | 0.812 | | 0.625 | 0.250 | 0.125 | 0.015 | 2 | - | 0.130 |
| PV 137075-A | 1.375 | 0.750 | | 1.020 | 0.312 | 0.156 | 0.015 | 3 | - | 0.185 |
| PV 137100-A | 1.375 | 1.000 | | 0.750 | 0.187 | 0.093 | 0.010 | 4 | - | 0.110 |
| PV 141091-A | 1.410 | 0.910 | | 0.625 | 0.250 | 0.125 | 0.015 | 2 | - | 0.140 |
| PV 150087-A | 1.500 | 0.875 | | 1.125 | 0.312 | 0.156 | 0.015 | 4 | - | 0.186 |
| PV 150100-A | 1.500 | 1.000 | | 0.750 | 0.250 | 0.125 | 0.015 | 2 | - | 0.175 |
| PV 150100-B | 1.500 | 1.000 | | 0.875 | 0.250 | 0.125 | 0.015 | 3 | - | 0.175 |
| PV 156106-A | 1.562 | 1.062 | | 0.695 | 0.250 | 0.125 | 0.015 | 3 | - | 0.156 |
| PV 156106-B | 1.562 | 1.062 | | 0.815 | 0.250 | 0.125 | 0.015 | 4 | - | 0.156 |
| PV 162100-A | 1.625 | 1.000 | | 1.000 | 0.312 | 0.156 | 0.015 | 3 | - | 0.186 |
| PV 162112-A | 1.625 | 1.125 | | 0.750 | 0.250 | 0.125 | 0.015 | 3 | - | 0.140 |
| PV 175125-A | 1.750 | 1.250 | | 0.750 | 0.250 | 0.125 | 0.015 | 3 | - | 0.150 |
| PV 175125-B | 1.750 | 1.250 | | 1.000 | 0.250 | 0.125 | 0.015 | 5 | - | 0.150 |
| PV 177115-A | 1.775 | 1.153 | | 0.875 | 0.316 | 0.156 | 0.015 | 2 | - | 0.210 |
| PV 178128-A | 1.781 | 1.281 | | 0.625 | 0.250 | 0.125 | 0.015 | 2 | - | 0.140 |
| PV 188137-A | 1.889 | 1.375 | | 1.000 | 0.257 | 0.125 | 0.015 | 3 | 2 | 0.120 |
| PV 200138-A | 2.000 | 1.380 | | 1.000 | 0.310 | 0.156 | 0.015 | 4 | - | 0.165 |
| PV 200138-B | 2.000 | 1.380 | | 1.165 | 0.310 | 0.156 | 0.015 | 5 | - | 0.165 |
| PV 200150-A | 2.000 | 1.500 | | 0.750 | 0.250 | 0.125 | 0.015 | 3 | - | 0.150 |
| PV 200150-B | 2.000 | 1.500 | | 0.900 | 0.250 | 0.125 | 0.015 | 4 | - | 0.150 |
| PV 212150-A | 2.125 | 1.500 | | 0.900 | 0.312 | 0.156 | 0.015 | 2 | - | 0.165 |
| PV 212150-B | 2.125 | 1.500 | | 1.000 | 0.312 | 0.156 | 0.015 | 3 | - | 0.165 |
| PV 212150-C | 2.125 | 1.500 | | 1.078 | 0.312 | 0.156 | 0.015 | 2 | 1 | 0.165 |
| PV 212150-D | 2.125 | 1.500 | | 1.040 | 0.312 | 0.156 | 0.015 | 3 | - | 0.165 |
| PV 212150-F | 2.125 | 1.500 | | 1.000 | 0.312 | 0.156 | 0.015 | 2 | 1 | 0.165 |
| PV 225125-A | 2.250 | 1.250 | | 1.840 | 0.500 | 0.250 | 0.032 | 4 | - | 0.295 |
| PV 225175-A | 2.250 | 1.750 | | 0.735 | 0.250 | 0.125 | 0.015 | 2 | 1 | 0.129 |
| PV 225175-B | 2.250 | 1.750 | | 0.640 | 0.250 | 0.125 | 0.015 | 1 | 1 | 0.129 |
| PV 225175-C | 2.250 | 1.750 | | 0.750 | 0.250 | 0.125 | 0.015 | 2 | 1 | 0.129 |
| PV 225175-D | 2.250 | 1.750 | | 0.790 | 0.250 | 0.125 | 0.015 | 3 | - | 0.129 |
| PV 225175-E | 2.250 | 1.750 | | 0.900 | 0.250 | 0.125 | 0.015 | 3 | 1 | 0.129 |
| PV 225175-G | 2.250 | 1.750 | | 0.900 | 0.250 | 0.125 | 0.015 | 4 | - | 0.129 |
| PV 226175-A | 2.264 | 1.750 | | 0.681 | 0.257 | 0.125 | 0.015 | 2 | 1 | 0.125 |
| PV 237175-A | 2.375 | 1.750 | | 0.970 | 0.312 | 0.156 | 0.015 | 2 | - | 0.190 |
| PV 237175-B | 2.375 | 1.750 | | 0.990 | 0.312 | 0.156 | 0.015 | 3 | - | 0.190 |
| PV 237175-C | 2.375 | 1.750 | | 1.093 | 0.312 | 0.156 | 0.015 | 3 | - | 0.190 |
| PV 237175-D | 2.375 | 1.750 | | 1.187 | 0.312 | 0.156 | 0.015 | 4 | - | 0.190 |
| PV 237175-E | 2.375 | 1.750 | | 1.093 | 0.312 | 0.156 | 0.015 | 2 | 1 | 0.190 |
| PV 237200-A | 2.375 | 2.000 | | 0.718 | 0.187 | 0.093 | 0.010 | 3 | - | 0.100 |
| PV 250175-A | 2.500 | 1.750 | | 1.000 | 0.375 | 0.187 | 0.032 | 3 | - | 0.195 |
| PV 250175-B | 2.500 | 1.750 | | 1.186 | 0.375 | 0.187 | 0.032 | 3 | 1 | 0.195 |




Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | f9 | H9 | +0.010 | Nominal | Min. | Max. | No. of fabric V rings | No. of Rubber V rings | Effective depth of single Fabric V |
|--------------------|-----------------|-----------------|-------|--------|---------|-------|----------------|-----------------------|-----------------------|------------------------------------|
| | ØD ₁ | Ød ₁ | ØG | -0.000 | S | C | R ₁ | | | |
| PV 250200-A | 2.500 | 2.000 | 0.650 | 0.250 | 0.125 | 0.015 | 2 | - | 0.150 | |
| PV 250200-B | 2.500 | 2.000 | 0.750 | 0.250 | 0.125 | 0.015 | 2 | - | 0.165 | |
| PV 250200/C | 2.500 | 2.000 | 0.875 | 0.250 | 0.125 | 0.015 | 4 | - | 0.150 | |
| PV 250200-D | 2.500 | 2.000 | 0.910 | 0.250 | 0.125 | 0.015 | 3 | - | 0.165 | |
| PV 250200-E | 2.500 | 2.000 | 0.812 | 0.250 | 0.125 | 0.015 | 3 | - | 0.165 | |
| PV 262200-A | 2.625 | 2.000 | 0.937 | 0.312 | 0.156 | 0.015 | 3 | - | 0.192 | |
| PV 262200-B | 2.625 | 2.000 | 1.000 | 0.312 | 0.156 | 0.015 | 3 | - | 0.192 | |
| PV 262200-C | 2.625 | 2.000 | 1.058 | 0.312 | 0.156 | 0.015 | 3 | 1 | 0.192 | |
| PV 262200-D | 2.625 | 2.000 | 1.125 | 0.312 | 0.156 | 0.015 | 4 | - | 0.192 | |
| PV 275200-A | 2.750 | 2.000 | 0.978 | 0.375 | 0.187 | 0.032 | 2 | 1 | 0.240 | |
| PV 275200-B | 2.750 | 2.000 | 1.027 | 0.375 | 0.187 | 0.032 | 2 | - | 0.240 | |
| PV 275212-A | 2.750 | 2.125 | 1.000 | 0.312 | 0.156 | 0.015 | 3 | - | 0.186 | |
| PV 275225-A | 2.750 | 2.250 | 0.750 | 0.250 | 0.125 | 0.015 | 3 | - | 0.120 | |
| PV 275225-B | 2.750 | 2.250 | 0.860 | 0.250 | 0.125 | 0.015 | 4 | - | 0.120 | |
| PV 276220-A | 2.764 | 2.200 | 0.681 | 0.282 | 0.125 | 0.015 | 2 | - | 0.120 | |
| PV 287225-A | 2.875 | 2.250 | 1.058 | 0.312 | 0.150 | 0.015 | 3 | 1 | 0.192 | |
| PV 300200-A | 3.000 | 2.000 | 1.000 | 0.500 | 0.250 | 0.032 | 1 | - | 0.295 | |
| PV 300200-B | 3.000 | 2.000 | 1.500 | 0.500 | 0.250 | 0.032 | 3 | - | 0.295 | |
| PV 300225-A | 3.000 | 2.250 | 1.020 | 0.375 | 0.187 | 0.032 | 2 | - | 0.230 | |
| PV 300225-B | 3.000 | 2.250 | 1.060 | 0.375 | 0.187 | 0.032 | 3 | - | 0.195 | |
| PV 300225-C | 3.000 | 2.250 | 1.281 | 0.375 | 0.187 | 0.032 | 4 | - | 0.230 | |
| PV 300225-D | 3.000 | 2.250 | 1.225 | 0.375 | 0.187 | 0.032 | 4 | - | 0.195 | |
| PV 300225-F | 3.000 | 2.250 | 1.250 | 0.375 | 0.187 | 0.032 | 3 | - | 0.195 | |
| PV 300250-A | 3.000 | 2.500 | 0.718 | 0.250 | 0.125 | 0.015 | 3 | - | 0.130 | |
| PV 300250-B | 3.000 | 2.500 | 0.810 | 0.250 | 0.125 | 0.015 | 3 | - | 0.130 | |
| PV 303227-A | 3.030 | 2.273 | 1.220 | 0.380 | 0.187 | 0.032 | 4 | - | 0.195 | |
| PV 303227-B | 3.030 | 2.273 | 1.220 | 0.380 | 0.187 | 0.032 | 2 | 2 | 0.195 | |
| PV 312249-A | 3.125 | 2.490 | 1.058 | 0.317 | 0.156 | 0.015 | 3 | 1 | 0.170 | |
| PV 325250-A | 3.250 | 2.500 | 0.978 | 0.375 | 0.187 | 0.032 | 2 | 1 | 0.195 | |
| PV 325250-B | 3.250 | 2.500 | 1.066 | 0.375 | 0.187 | 0.032 | 3 | - | 0.214 | |
| PV 325250-C | 3.250 | 2.500 | 1.250 | 0.375 | 0.187 | 0.032 | 4 | - | 0.214 | |
| PV 337262-A | 3.375 | 2.625 | 1.975 | 0.375 | 0.187 | 0.032 | 6 | - | 0.220 | |
| PV 337262-B | 3.375 | 2.625 | 1.312 | 0.375 | 0.187 | 0.032 | 3 | - | 0.220 | |
| PV 350275-A | 3.500 | 2.750 | 1.000 | 0.375 | 0.187 | 0.032 | 2 | 1 | 0.170 | |
| PV 350275-C | 3.500 | 2.750 | 1.250 | 0.375 | 0.187 | 0.032 | 3 | - | 0.250 | |
| PV 350275-D | 3.500 | 2.750 | 1.280 | 0.375 | 0.187 | 0.032 | 3 | - | 0.200 | |
| PV 353278-A | 3.531 | 2.781 | 1.200 | 0.375 | 0.187 | 0.032 | 2 | 2 | 0.225 | |
| PV 362300-A | 3.625 | 3.000 | 0.875 | 0.312 | 0.156 | 0.015 | 2 | - | 0.180 | |
| PV 375300-A | 3.750 | 3.000 | 1.060 | 0.375 | 0.187 | 0.032 | 2 | 1 | 0.195 | |
| PV 375300-B | 3.750 | 3.000 | 1.320 | 0.375 | 0.187 | 0.032 | 3 | 2 | 0.195 | |
| PV 375300-C | 3.750 | 3.000 | 1.250 | 0.375 | 0.187 | 0.032 | 3 | 1 | 0.195 | |
| PV 375300-D | 3.750 | 3.000 | 0.970 | 0.375 | 0.187 | 0.032 | 3 | - | 0.195 | |
| PV 376319-A | 3.767 | 3.196 | 0.889 | 0.285 | 0.156 | 0.015 | 3 | 2 | 0.125 | |
| PV 400325-A | 4.000 | 3.250 | 1.141 | 0.375 | 0.187 | 0.032 | 3 | - | 0.195 | |
| PV 400325-B | 4.000 | 3.250 | 1.230 | 0.375 | 0.187 | 0.032 | 2 | 1 | 0.195 | |
| PV 400337-A | 4.000 | 3.375 | 0.937 | 0.312 | 0.156 | 0.015 | 2 | - | 0.186 | |
| PV 400350-A | 4.000 | 3.500 | 0.762 | 0.250 | 0.125 | 0.015 | 3 | - | 0.145 | |
| PV 400350-B | 4.000 | 3.500 | 0.937 | 0.250 | 0.125 | 0.015 | 4 | - | 0.145 | |
| PV 403328-A | 4.031 | 3.281 | 1.156 | 0.375 | 0.187 | 0.032 | 2 | 2 | 0.196 | |
| PV 418368-A | 4.187 | 3.687 | 0.889 | 0.250 | 0.125 | 0.015 | 3 | 2 | 0.120 | |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | f9 | H9 | +0.010 -0.000 | Nominal | Min. | Max. | No. of fabric V rings | No. of Rubber V rings | Effective depth of single Fabric V |
|--------------------|-----------------|-----------------|----|------------------|---------|-------|----------------|-----------------------|-----------------------|------------------------------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | S | C | R ₁ | | | |
| PV 425350-A | 4.250 | 3.500 | | 1.030 | 0.375 | 0.187 | 0.032 | 3 | - | 0.205 |
| PV 425350-B | 4.250 | 3.500 | | 1.210 | 0.375 | 0.187 | 0.032 | 3 | 1 | 0.205 |
| PV 425350-C | 4.250 | 3.500 | | 0.875 | 0.375 | 0.187 | 0.032 | 2 | - | 0.205 |
| PV 425350-D | 4.250 | 3.500 | | 0.920 | 0.375 | 0.187 | 0.032 | 2 | - | 0.205 |
| PV 426350-A | 4.269 | 3.500 | | 1.406 | 0.384 | 0.187 | 0.032 | 3 | 2 | 0.200 |
| PV 450350-A | 4.500 | 3.500 | | 1.389 | 0.500 | 0.250 | 0.032 | 3 | - | 0.250 |
| PV 450375-A | 4.500 | 3.750 | | 1.020 | 0.375 | 0.187 | 0.032 | 3 | - | 0.195 |
| PV 450387-A | 4.500 | 3.875 | | 0.937 | 0.312 | 0.156 | 0.015 | 2 | - | 0.186 |
| PV 450400-A | 4.500 | 4.000 | | 1.032 | 0.250 | 0.125 | 0.015 | 3 | - | 0.255 |
| PV 450400-B | 4.500 | 4.000 | | 1.289 | 0.250 | 0.125 | 0.015 | 4 | - | 0.255 |
| PV 500350-A | 5.000 | 3.500 | | 1.625 | 0.750 | 0.250 | 0.032 | 3 | - | 0.295 |
| PV 500400-A | 5.000 | 4.000 | | 1.496 | 0.500 | 0.250 | 0.032 | 3 | 1 | 0.250 |
| PV 500400-B | 5.000 | 4.000 | | 1.312 | 0.500 | 0.250 | 0.032 | 3 | - | 0.250 |
| PV 502425-A | 5.029 | 4.250 | | 1.406 | 0.389 | 0.187 | 0.032 | 3 | 2 | 0.196 |
| PV 550450-A | 5.500 | 4.500 | | 1.496 | 0.500 | 0.250 | 0.032 | 3 | 1 | 0.250 |
| PV 550475-A | 5.500 | 4.750 | | 1.125 | 0.375 | 0.187 | 0.032 | 3 | - | 0.230 |
| PV 600500-A | 6.000 | 5.000 | | 1.265 | 0.500 | 0.250 | 0.032 | 3 | - | 0.225 |
| PV 700600-A | 7.000 | 6.000 | | 1.375 | 0.500 | 0.250 | 0.032 | 3 | - | 0.225 |
| PV 800700-A | 8.000 | 7.000 | | 1.281 | 0.500 | 0.250 | 0.032 | 3 | - | 0.234 |



Design

Claron Style PDS rod seal is a 3 piece assembly consisting of a Nitrile Rubber sealing element which is backed up by a tough Thermoplastic elastomer header complete with an Acetal anti-extrusion ring on the I.D. The complete assembly forms a highly robust sealing unit for use in high pressure applications where shock loads and pressure spikes are present. This seal is widely used in the mobile plant industry and is also a modern replacement for common veepac seals.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 325 Bar |
| 0.15 | 600 Bar |

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting


Style PDS is designed to be fitted into a split gland as shown in the illustration below. The seal can be supplied split to ease fitting if required. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

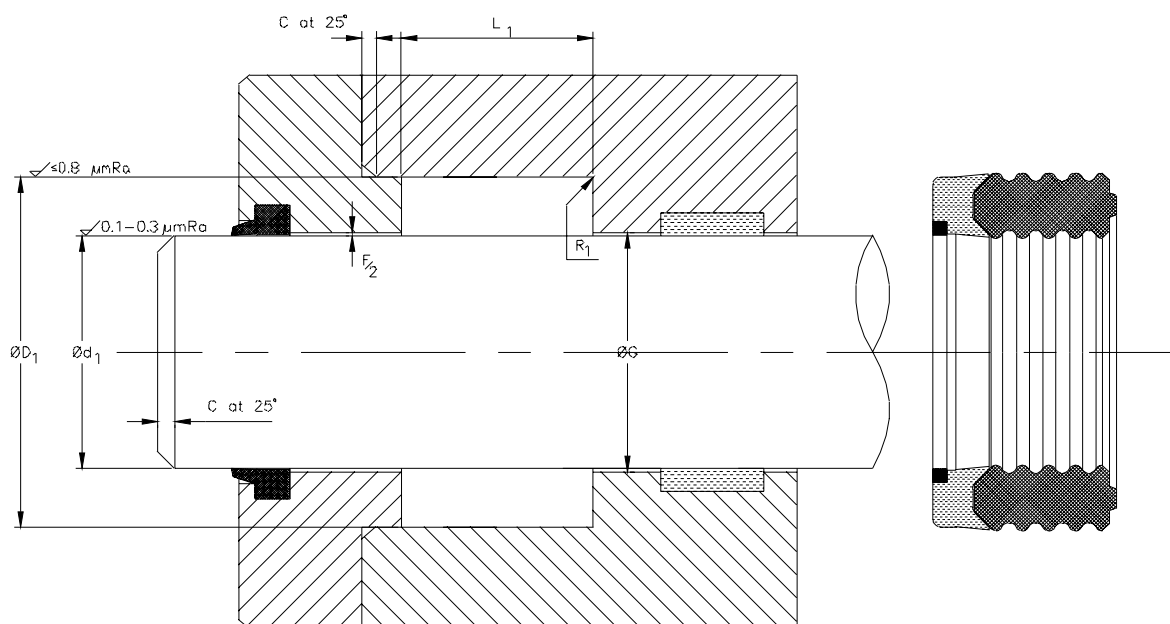




Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | Js11 | +0.25 -0.00 L ₁ | Nominal Section S | Min. C | Max. R ₁ |
|-----------------------|-----------------|----|-----------------|----------------------------------|-------------------------|-----------|------------------------|
| | Ød ₁ | ØG | ØD ₁ | | | | |
| PDS 169118 | 30 | | 43 | 20.0 | 6.5 | 3 | 0.4 |
| PDS 204157 | 40 | | 52 | 22.5 | 6.0 | 3 | 0.4 |
| PDS 216157 | 40 | | 55 | 22.5 | 7.5 | 4 | 0.4 |
| PDS 248196 | 50 | | 63 | 20.0 | 6.5 | 3 | 0.4 |
| PDS 255196 | 50 | | 65 | 22.5 | 7.5 | 4 | 0.4 |
| PDS 295236 | 60 | | 75 | 22.5 | 7.5 | 4 | 0.4 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | Js11 | +0.010 -0.000 L ₁ | Nominal | Min. | Max. |
|-----------------------|-----------------|----|-----------------|------------------------------------|---------|-------|----------------|
| | Ød ₁ | ØG | ØD ₁ | | S | C | R ₁ |
| PDS 175125 | 1.250 | | 1.750 | 0.750 | 0.250 | 0.125 | 0.015 |
| PDS 200150 | 1.500 | | 2.000 | 0.748 | 0.250 | 0.125 | 0.015 |
| PDS 237175 | 1.750 | | 2.375 | 1.060 | 0.312 | 0.156 | 0.015 |
| PDS 250200 | 2.000 | | 2.500 | 0.850 | 0.250 | 0.125 | 0.015 |
| PDS 262200 | 2.000 | | 2.625 | 1.000 | 0.312 | 0.156 | 0.015 |
| PDS 325250 | 2.500 | | 3.250 | 1.230 | 0.375 | 0.187 | 0.032 |



Design

Claron Style EGS rod seal is a 2 piece assembly consisting of a Nitrile Rubber sealing element complete with rubberised fabric reinforcement which is backed up by a tough Thermoplastic elastomer header. The complete assembly forms a robust sealing unit for use in high pressure applications where shock loads and pressure spikes are present. This seal is widely used in telescopic cylinder applications.

Operating Conditions

| Maximum Pressure | |
|------------------|----------------|
| Max Speed | Temp. Range |
| m/s | -30°C to 100°C |
| 0.50 | 250 Bar |
| 0.15 | 400 Bar |

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |


These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

Style EGS is designed to be fitted into a split gland as shown in the illustration below. The seal can be supplied split to ease fitting if required. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

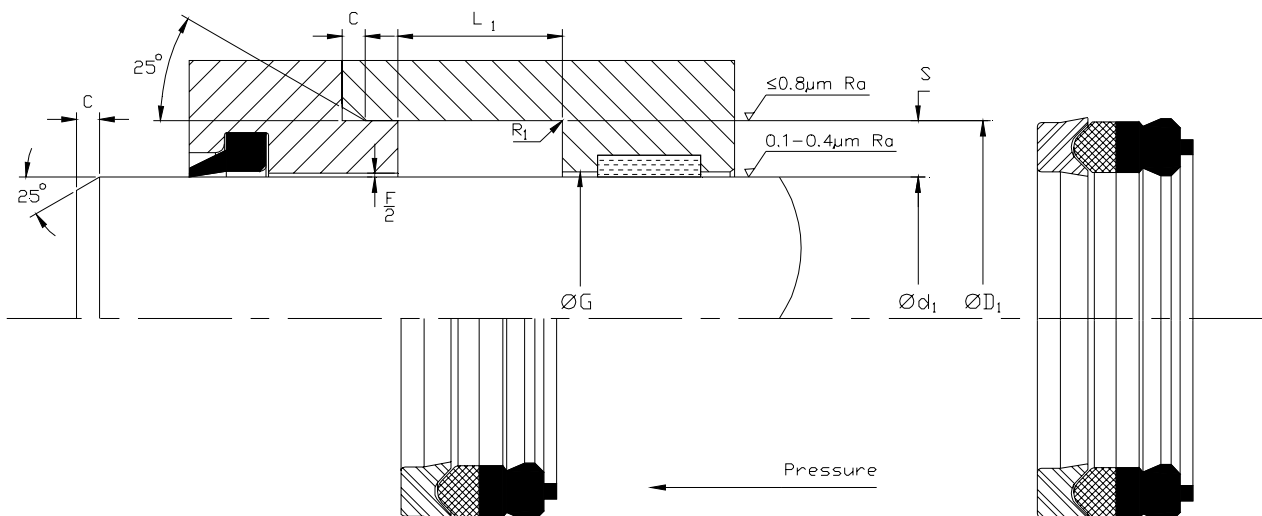





ClaronPolyseal®
Single Acting Rod Seal Imperial
EGS



Nominal Dimensions & Machining Tolerances

| Claron Part Number | ±0.001 | H9 | ±0.003 | +0.015 +0.025 | Max. | Max. | Max. |
|-----------------------|-----------------|----|-----------------|------------------|-------|----------------|----------------|
| | Ød ₁ | ØG | ØD ₁ | L ₁ | F | R ₁ | R ₂ |
| EGS 275 | 2.750 | | 3.200 | 0.750 | 0.010 | 0.020 | 0.030 |
| EGS 350 | 3.500 | | 4.013 | 0.750 | 0.010 | 0.020 | 0.030 |
| EGS 437 | 4.365 | | 4.888 | 0.750 | 0.010 | 0.020 | 0.030 |
| EGS 525 | 5.249 | | 5.888 | 0.775 | 0.010 | 0.020 | 0.030 |
| EGS 631 | 6.312 | | 6.889 | 0.750 | 0.010 | 0.020 | 0.030 |
| EGS 731 | 7.312 | | 7.954 | 0.750 | 0.010 | 0.020 | 0.030 |
| EGS 837 | 8.375 | | 9.000 | 0.750 | 0.010 | 0.020 | 0.030 |



Design

The Claron style CPU is a symmetrical profiled lip seal manufactured in a high performance grade of Polyurethane and is suitable for both rod and piston sealing. The sealing lips are machine trimmed to ensure dimensional consistency and good low pressure sealing. Polyurethane exhibits outstanding abrasion and extrusion resistance.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 280 Bar | 250 Bar |
| 0.15 | 400 Bar | 350 Bar |


These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

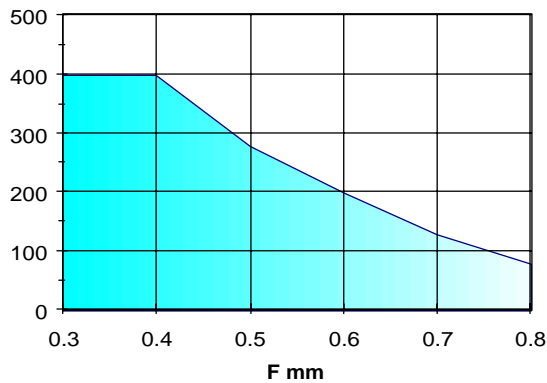

Continuous operating temperature for various Fluids

| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C . The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to $F/2$ thus increasing the pressure capability of the seal.

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Refer to section B for piston application.

Fitting


For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

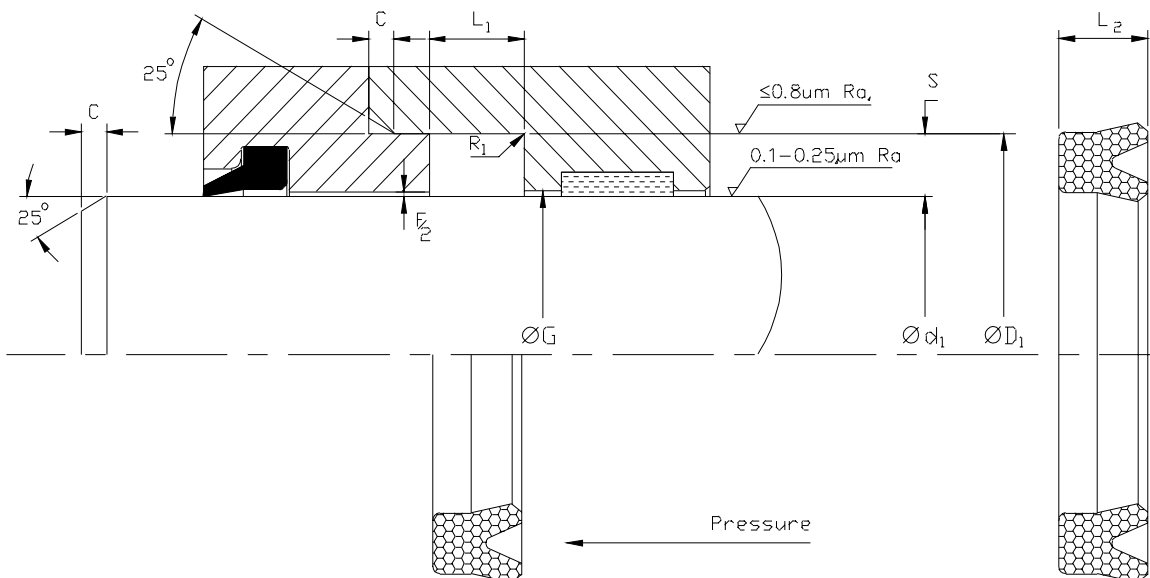





ClaronPolyseal®
Single Acting Rod Seal Metric
CPU




Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----|----------------|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | L ₂ | S | C | R ₁ |
| CPU 062039 | 16.00 | 10.00 | | 5.00 | 4.40 | 4.00 | 3.00 | 0.20 |
| CPU 078047 | 20.00 | 12.00 | | 9.00 | 8.40 | 4.00 | 3.00 | 0.20 |
| CPU 078055 | 20.00 | 14.00 | | 4.50 | 4.00 | 3.00 | 3.00 | 0.20 |
| CPU 086063 | 22.00 | 16.00 | | 5.00 | 4.40 | 3.00 | 3.00 | 0.20 |
| CPU 098055 | 25.00 | 14.00 | | 6.10 | 5.50 | 5.50 | 4.00 | 0.30 |
| CPU 098063 | 25.00 | 16.00 | | 8.25 | 7.50 | 4.50 | 4.00 | 0.30 |
| CPU 098070 | 25.00 | 18.00 | | 6.75 | 6.00 | 3.50 | 3.00 | 0.20 |
| CPU 102063 | 26.00 | 16.00 | | 8.75 | 8.00 | 5.00 | 4.00 | 0.30 |
| CPU 102070 | 26.00 | 18.00 | | 5.70 | 5.00 | 4.00 | 3.00 | 0.20 |
| CPU 110078 | 28.00 | 20.00 | | 7.25 | 6.50 | 4.00 | 3.00 | 0.20 |
| CPU 110078/1 | 28.00 | 20.00 | | 5.70 | 5.00 | 4.00 | 3.00 | 0.30 |
| CPU 110086 | 28.00 | 22.00 | | 5.50 | 4.50 | 3.00 | 3.00 | 0.20 |
| CPU 118078 | 30.00 | 20.00 | | 8.75 | 8.00 | 5.00 | 4.00 | 0.30 |
| CPU 118086 | 30.00 | 22.00 | | 6.75 | 6.00 | 4.00 | 3.00 | 0.20 |
| CPU 118088 | 30.00 | 22.40 | | 5.70 | 5.00 | 3.80 | 3.00 | 0.30 |
| CPU 129098 | 33.00 | 25.00 | | 6.30 | 5.70 | 4.00 | 3.00 | 0.20 |
| CPU 129098/1 | 33.00 | 25.00 | | 8.75 | 8.00 | 4.00 | 3.00 | 0.20 |
| CPU 129098/2 | 33.00 | 25.00 | | 5.60 | 5.00 | 4.00 | 3.00 | 0.20 |
| CPU 137098 | 35.00 | 25.00 | | 8.75 | 8.00 | 5.00 | 4.00 | 0.30 |
| CPU 137098/1 | 35.00 | 25.00 | | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 137098/2 | 35.00 | 25.00 | | 7.50 | 7.30 | 5.00 | 4.00 | 0.30 |
| CPU 139110 | 35.50 | 28.00 | | 5.70 | 5.00 | 3.75 | 3.00 | 0.20 |
| CPU 149098 | 38.00 | 25.00 | | 10.75 | 10.00 | 6.50 | 4.00 | 0.30 |
| CPU 157078 | 40.00 | 20.00 | | 12.00 | 11.00 | 10.00 | 5.00 | 0.40 |
| CPU 157098 | 40.00 | 25.00 | | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 157118 | 40.00 | 30.00 | | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 157118/1 | 40.00 | 30.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 163124 | 41.50 | 31.50 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 165118 | 42.00 | 30.00 | | 10.75 | 10.00 | 6.00 | 4.00 | 0.30 |
| CPU 165125 | 42.00 | 32.00 | | 6.30 | 5.80 | 5.00 | 4.00 | 0.30 |
| CPU 169110 | 43.00 | 28.00 | | 11.00 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 173141 | 44.00 | 36.00 | | 8.75 | 8.00 | 4.00 | 3.00 | 0.20 |
| CPU 177118 | 45.00 | 30.00 | | 10.75 | 10.00 | 7.50 | 5.00 | 0.30 |
| CPU 177137 | 45.00 | 35.00 | | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 177137/1 | 45.00 | 35.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 181141 | 46.00 | 36.00 | | 8.00 | 7.30 | 5.00 | 4.00 | 0.30 |
| CPU 196118 | 50.00 | 30.00 | | 10.75 | 10.00 | 10.00 | 4.00 | 0.30 |
| CPU 196137 | 50.00 | 35.00 | | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 196157 | 50.00 | 40.00 | | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 196157/2 | 50.00 | 40.00 | | 5.75 | 5.00 | 5.00 | 4.00 | 0.30 |
| CPU 196157/3 | 50.00 | 40.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 196165 | 50.00 | 42.00 | | 6.30 | 5.80 | 4.00 | 3.00 | 0.20 |
| CPU 216149 | 55.00 | 38.00 | | 10.75 | 10.00 | 8.50 | 5.00 | 0.40 |
| CPU 216157 | 55.00 | 40.00 | | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 216177/1 | 55.00 | 45.00 | | 6.75 | 6.00 | 5.00 | 4.00 | 0.30 |




Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.25 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----|-------------------------|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | ØG | -0.00 L ₁ | L ₂ | S | C | R ₁ |
| CPU 216177 | 55.00 | 45.00 | | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 236157 | 60.00 | 40.00 | | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 236157/1 | 60.00 | 40.00 | | 19.00 | 18.00 | 10.00 | 5.00 | 0.40 |
| CPU 236177 | 60.00 | 45.00 | | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 236196 | 60.00 | 50.00 | | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 236196/1 | 60.00 | 50.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 248208 | 63.00 | 53.00 | | 6.75 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 255177 | 65.00 | 45.00 | | 10.75 | 10.00 | 10.00 | 5.00 | 0.40 |
| CPU 255196 | 65.00 | 50.00 | | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 255216/2 | 65.00 | 55.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 255216 | 65.00 | 55.00 | | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 275196 | 70.00 | 50.00 | | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 275196/1 | 70.00 | 50.00 | | 10.75 | 10.00 | 10.00 | 5.00 | 0.40 |
| CPU 275196/2 | 70.00 | 50.00 | | 19.00 | 18.00 | 10.00 | 5.00 | 0.40 |
| CPU 275236/1 | 70.00 | 60.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 275236 | 70.00 | 60.00 | | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 295216 | 75.00 | 55.00 | | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 295255 | 75.00 | 65.00 | | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 295255/1 | 75.00 | 65.00 | | 10.75 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 295255/2 | 75.00 | 65.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 307228 | 78.00 | 58.00 | | 16.00 | 15.00 | 5.00 | 4.00 | 0.30 |
| CPU 314236 | 80.00 | 60.00 | | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 314236/1 | 80.00 | 60.00 | | 19.00 | 18.00 | 10.00 | 5.00 | 0.40 |
| CPU 314255 | 80.00 | 65.00 | | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 314275/3 | 80.00 | 70.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 314275/1 | 80.00 | 70.00 | | 9.00 | 8.00 | 5.00 | 4.00 | 0.30 |
| CPU 314275/2 | 80.00 | 70.00 | | 11.00 | 10.00 | 5.00 | 4.00 | 0.30 |
| CPU 314275 | 80.00 | 70.00 | | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 334255 | 85.00 | 65.00 | | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 334275 | 85.00 | 70.00 | | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 334295 | 85.00 | 75.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 354275 | 90.00 | 70.00 | | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 354295 | 90.00 | 75.00 | | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 354314/1 | 90.00 | 80.00 | | 7.00 | 6.00 | 5.00 | 4.00 | 0.30 |
| CPU 354314 | 90.00 | 80.00 | | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 374295 | 95.00 | 75.00 | | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 374314 | 95.00 | 80.00 | | 10.75 | 10.00 | 7.50 | 5.00 | 0.40 |
| CPU 393314 | 100.00 | 80.00 | | 12.75 | 12.00 | 10.00 | 5.00 | 0.40 |
| CPU 393334/1 | 100.00 | 85.00 | | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 393334 | 100.00 | 85.00 | | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 413334 | 105.00 | 85.00 | | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 4133354/1 | 105.00 | 90.00 | | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 413354 | 105.00 | 90.00 | | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 433354 | 110.00 | 90.00 | | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 433374/1 | 110.00 | 95.00 | | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |




ClaronPolyseal®
Single Acting Rod Seal
CPU

Metric




Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.010 -0.000 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----|------------------|----------------|---------|------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | L ₂ | S | C | R ₁ |
| CPU 433374 | 110.00 | 95.00 | | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 452374 | 115.00 | 95.00 | | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 452393/1 | 115.00 | 100.00 | | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 452393 | 115.00 | 100.00 | | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 472393 | 120.00 | 100.00 | | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 492393 | 125.00 | 100.00 | | 15.75 | 15.00 | 12.50 | 6.50 | 0.60 |
| CPU 492413 | 125.00 | 105.00 | | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 492413/1 | 125.00 | 105.00 | | 13.00 | 12.00 | 10.00 | 5.00 | 0.60 |
| CPU 492433 | 125.00 | 110.00 | | 12.75 | 12.00 | 7.50 | 5.00 | 0.40 |
| CPU 492440 | 125.00 | 112.00 | | 10.00 | 9.00 | 6.50 | 5.00 | 0.30 |
| CPU 492452 | 125.00 | 115.00 | | 12.75 | 12.00 | 5.00 | 4.00 | 0.30 |
| CPU 511433 | 130.00 | 110.00 | | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 551472 | 140.00 | 120.00 | | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 551492 | 140.00 | 125.00 | | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 570492 | 145.00 | 125.00 | | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 590511 | 150.00 | 130.00 | | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 590535 | 150.00 | 136.00 | | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 610551 | 155.00 | 140.00 | | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 629551 | 160.00 | 140.00 | | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |
| CPU 629570 | 160.00 | 145.00 | | 10.00 | 9.00 | 7.50 | 5.00 | 0.40 |
| CPU 669590 | 170.00 | 150.00 | | 17.00 | 15.00 | 10.00 | 5.00 | 0.60 |



ClaronPolyseal®
Single Acting Rod Seal Imperial
CPU



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----|----------------|----------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | L ₂ | S | C | R ₁ |
| CPU 056031 | 0.562 | 0.312 | | 0.275 | 0.250 | 0.125 | 0.093 | 0.016 |
| CPU 100062 | 1.000 | 0.625 | | 0.300 | 0.281 | 0.187 | 0.093 | 0.016 |
| CPU 100062/1 | 1.000 | 0.625 | | 0.208 | 0.187 | 0.187 | 0.093 | 0.016 |
| CPU 125087 | 1.250 | 0.875 | | 0.208 | 0.187 | 0.187 | 0.093 | 0.016 |
| CPU 150100 | 1.500 | 1.000 | | 0.275 | 0.250 | 0.250 | 0.125 | 0.032 |
| CPU 162112 | 1.625 | 1.125 | | 0.550 | 0.500 | 0.250 | 0.125 | 0.032 |
| CPU 175112 | 1.750 | 1.125 | | 0.550 | 0.500 | 0.312 | 0.156 | 0.032 |
| CPU 175125 | 1.750 | 1.250 | | 0.312 | 0.280 | 0.250 | 0.125 | 0.032 |
| CPU 187150 | 1.875 | 1.500 | | 0.275 | 0.250 | 0.187 | 0.093 | 0.016 |
| CPU 200137 | 2.000 | 1.375 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 200137/1 | 2.000 | 1.375 | | 0.520 | 0.500 | 0.312 | 0.156 | 0.032 |
| CPU 225150 | 2.250 | 1.500 | | 0.550 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 225162 | 2.250 | 1.625 | | 0.457 | 0.437 | 0.312 | 0.156 | 0.032 |
| CPU 237175 | 2.375 | 1.750 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 237175/1 | 2.375 | 1.750 | | 0.395 | 0.375 | 0.312 | 0.156 | 0.032 |
| CPU 250150 | 2.500 | 1.500 | | 0.665 | 0.625 | 0.500 | 0.156 | 0.032 |
| CPU 250212 | 2.500 | 2.125 | | 0.280 | 0.250 | 0.187 | 0.093 | 0.016 |
| CPU 262200 | 2.625 | 2.000 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 262200/1 | 2.625 | 2.000 | | 0.340 | 0.312 | 0.312 | 0.156 | 0.032 |
| CPU 262212 | 2.625 | 2.125 | | 0.395 | 0.375 | 0.250 | 0.125 | 0.032 |
| CPU 275200 | 2.750 | 2.000 | | 0.520 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 287187 | 2.875 | 1.875 | | 0.665 | 0.625 | 0.500 | 0.216 | 0.046 |
| CPU 300225 | 3.000 | 2.250 | | 0.520 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 300237 | 3.000 | 2.375 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 312250 | 3.125 | 2.500 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 325262 | 3.250 | 2.625 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 337275 | 2.375 | 2.750 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 350250 | 3.500 | 2.500 | | 0.730 | 0.687 | 0.500 | 0.216 | 0.046 |
| CPU 350275 | 3.500 | 2.750 | | 0.520 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 362300 | 3.625 | 3.000 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 362300/1 | 3.625 | 3.000 | | 0.340 | 0.312 | 0.312 | 0.156 | 0.032 |
| CPU 375300 | 3.750 | 3.000 | | 0.520 | 0.500 | 0.375 | 0.187 | 0.046 |
| CPU 387325 | 3.875 | 3.250 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 400300 | 4.000 | 3.000 | | 0.730 | 0.687 | 0.500 | 0.216 | 0.046 |
| CPU 412337 | 4.125 | 3.375 | | 0.582 | 0.562 | 0.375 | 0.156 | 0.032 |
| CPU 425350 | 4.250 | 3.500 | | 0.530 | 0.500 | 0.312 | 0.156 | 0.032 |
| CPU 425362 | 4.250 | 3.625 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 450350 | 4.500 | 3.500 | | 0.730 | 0.687 | 0.500 | 0.216 | 0.046 |
| CPU 487425 | 4.875 | 4.250 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 500437 | 5.000 | 4.375 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 525462 | 5.250 | 4.625 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 600537 | 6.000 | 5.375 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |
| CPU 700637 | 7.000 | 6.375 | | 0.582 | 0.562 | 0.312 | 0.156 | 0.032 |



Design

The Claron style CPU.../F is a symmetrical profiled lip seal manufactured in a high performance grade of Polyurethane and is suitable for both rod and piston sealing. The sealing lips are machine trimmed to ensure dimensional consistency and good low pressure sealing. Polyurethane exhibits outstanding abrasion and extrusion resistance.


Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 280 Bar | 250 Bar |
| 0.15 | 400 Bar | 350 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

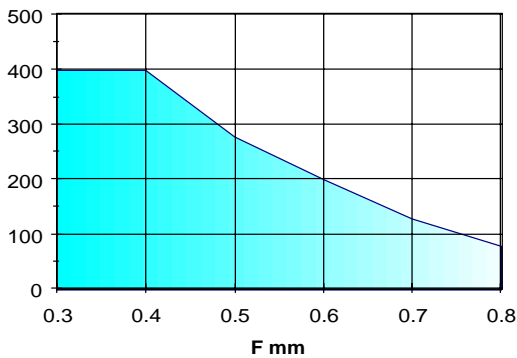

Continuous operating temperature for various Fluids

| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C

The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.

Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

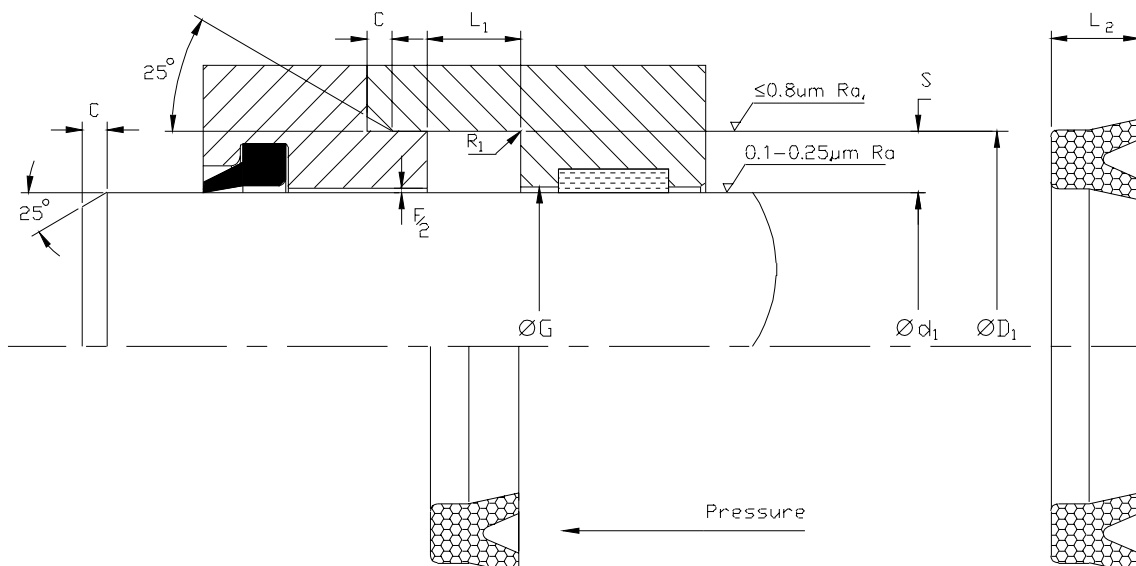



Claron Polyseal®
Single Acting Rod Seal

Metric

CPU.../F



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----|----------------|----------------|---------|-----|----------------|
| | ØD ₁ | Ød ₁ | ØG | L ₁ | L ₂ | S | C | R ₁ |
| CPU 086063/F | 22 | 16 | | 4.50 | 4.0 | 3.0 | 3.0 | 0.2 |
| CPU 118078/1F | 30 | 20 | | 6.75 | 6.0 | 5.0 | 4.0 | 0.3 |
| CPU 141078/F | 36 | 20 | | 8.75 | 8.0 | 8.0 | 5.0 | 0.4 |
| CPU 141110/F | 36 | 28 | | 4.50 | 4.0 | 4.0 | 3.0 | 0.2 |
| CPU 196177/F | 50 | 45 | | 4.50 | 4.0 | 2.5 | 1.5 | 0.2 |
| CPU 267236/F | 68 | 60 | | 8.75 | 8.0 | 4.0 | 3.0 | 0.2 |
| CPU 393354/F | 100 | 90 | | 7.50 | 7.0 | 5.0 | 4.0 | 0.3 |
| CPU 511433/F | 130 | 110 | | 15.75 | 15.0 | 10.0 | 5.0 | 0.4 |
| CPU 846669/F | 215 | 170 | | 22.00 | 20.0 | 22.5 | 8.0 | 1.0 |



Claron Polyseal®
Single Acting Rod Seal


Imperial

CPU.../F




Nominal Dimensions & Machining Tolerances

| Claron Part Number | Js 11 | f8 | H9 | +0.010 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----|--------------------------|----------------|---------|-------|----------------|
| | ØD ₁ | Ød ₁ | ØG | -0.000 L ₁ | L ₂ | S | C | R ₁ |
| CPU 062031/F | 0.625 | 0.312 | | 0.275 | 0.250 | 0.156 | 0.093 | 0.016 |
| CPU 068043/F | 0.687 | 0.437 | | 0.281 | 0.250 | 0.125 | 0.093 | 0.016 |
| CPU 075037/F | 0.750 | 0.375 | | 0.300 | 0.281 | 0.187 | 0.093 | 0.016 |
| CPU 075037/1F | 0.750 | 0.375 | | 0.275 | 0.250 | 0.187 | 0.093 | 0.016 |
| CPU 087062/F | 0.875 | 0.625 | | 0.275 | 0.250 | 0.125 | 0.093 | 0.016 |
| CPU 100075/F | 1.000 | 0.750 | | 0.175 | 0.156 | 0.125 | 0.093 | 0.016 |
| CPU 162112/F | 1.625 | 1.125 | | 0.550 | 0.500 | 0.250 | 0.125 | 0.032 |
| CPU 168118/F | 1.687 | 1.187 | | 0.400 | 0.375 | 0.250 | 0.125 | 0.032 |
| CPU 175112/F | 1.750 | 1.125 | | 0.550 | 0.500 | 0.312 | 0.156 | 0.032 |
| CPU 206168/F | 2.062 | 1.687 | | 0.340 | 0.312 | 0.187 | 0.093 | 0.016 |



ClaronPolyseal® Single Acting Rod Seal CPU.../G

Metric
Imperial



Design

The Claron style CPG.../G is an asymmetrical profiled lip seal designed for medium duty rod applications. Features include an outside diameter specifically designed for static face sealing and a robust inner lip for high performance sealing. Manufactured in a high performance grade of Polyurethane for outstanding abrasion and extrusion resistance combined with flexibility for ease of installation. European and Japanese standard housings are covered in this range.


Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 280 Bar | 250 Bar |
| 0.15 | 400 Bar | 350 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

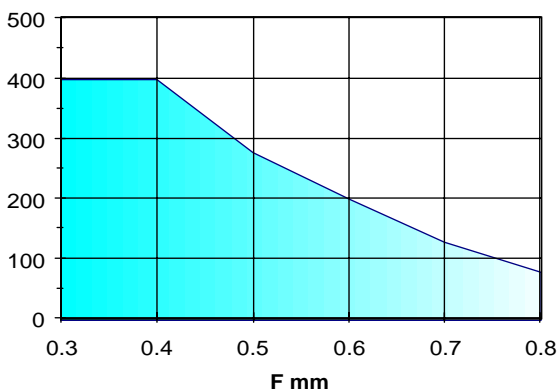

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C
The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Continuous operating temperature for various Fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

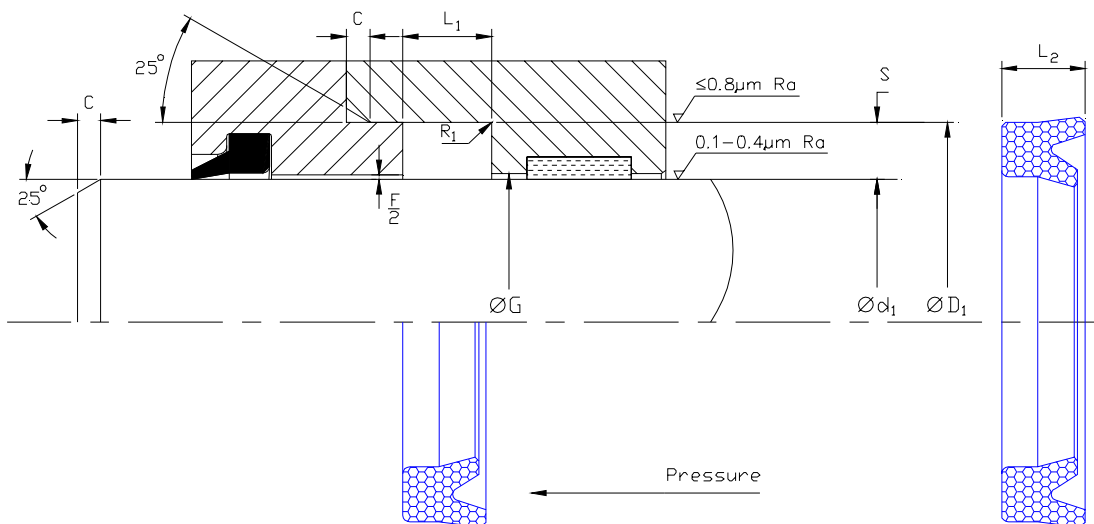




ClaronPolyseal®
Single Acting Rod Seal Metric
CPU.../G




Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | Js 11 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|----|-----------------|----------------|----------------|---------|-----|----------------|
| | Ød ₁ | ØG | ØD ₁ | L ₁ | L ₂ | S | C | R ₁ |
| CPU 074047/G | 12 | | 19 | 5.6 | 5.0 | 3.5 | 3.0 | 0.3 |
| CPU 110078/G | 20 | | 28 | 6.3 | 5.7 | 4.0 | 3.0 | 0.3 |
| CPU 141110/G | 28 | | 36 | 6.3 | 5.7 | 4.0 | 3.0 | 0.3 |
| CPU 145118/G | 30 | | 37 | 6.7 | 6.0 | 3.5 | 3.0 | 0.3 |
| CPU 157118/1G | 30 | | 40 | 8.0 | 7.3 | 5.0 | 3.5 | 0.5 |
| CPU 157125/G | 32 | | 40 | 6.3 | 5.7 | 4.0 | 3.0 | 0.3 |
| CPU 177137/1G | 35 | | 45 | 8.0 | 7.3 | 5.0 | 3.5 | 0.5 |
| CPU 188157/G | 40 | | 48 | 6.3 | 5.7 | 4.0 | 3.0 | 0.3 |
| CPU 255157/G | 40 | | 55 | 11.0 | 10.0 | 7.5 | 5.0 | 0.3 |
| CPU 208177/G | 45 | | 53 | 6.3 | 5.8 | 4.0 | 3.0 | 0.3 |
| CPU 216157/G | 40 | | 55 | 11.0 | 10.0 | 7.5 | 5.0 | 0.4 |
| CPU 228177/G | 45 | | 58 | 9.0 | 8.3 | 6.5 | 4.0 | 0.4 |
| CPU 236157/2G | 40 | | 60 | 11.0 | 10.0 | 10.0 | 5.0 | 0.6 |
| CPU 248196/G | 50 | | 63 | 11.0 | 10.0 | 6.5 | 4.0 | 0.4 |
| CPU 267216/G | 55 | | 68 | 11.0 | 10.0 | 6.5 | 4.0 | 0.4 |
| CPU 287236/G | 60 | | 73 | 11.0 | 10.0 | 6.5 | 4.0 | 0.4 |
| CPU 307255/G | 65 | | 78 | 11.0 | 10.0 | 6.5 | 4.0 | 0.4 |
| CPU 314255/G | 65 | | 80 | 10.0 | 9.0 | 7.5 | 5.0 | 0.3 |
| CPU 334255/G | 65 | | 85 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 334275/G | 70 | | 85 | 10.0 | 9.0 | 7.5 | 5.0 | 0.4 |
| CPU 326275/G | 70 | | 83 | 11.0 | 10.0 | 6.5 | 4.0 | 0.4 |
| CPU 354275/G | 70 | | 90 | 13.0 | 12.0 | 10.0 | 5.0 | 0.4 |
| CPU 354295/G | 75 | | 90 | 10.0 | 9.0 | 7.5 | 5.0 | 0.4 |
| CPU 346295/G | 75 | | 88 | 11.0 | 10.0 | 6.5 | 4.0 | 0.4 |
| CPU 366314/G | 80 | | 93 | 11.0 | 10.0 | 6.5 | 4.0 | 0.6 |
| CPU 374295/G | 75 | | 95 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 374314/G | 80 | | 95 | 10.0 | 9.0 | 7.5 | 5.0 | 0.4 |
| CPU 393314/G | 80 | | 100 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 393334/G | 85 | | 100 | 11.0 | 10.0 | 7.5 | 5.0 | 0.4 |
| CPU 393334/1G | 85 | | 100 | 10.0 | 10.0 | 7.5 | 5.0 | 0.4 |
| CPU 393354/G | 90 | | 100 | 13.0 | 12.0 | 5.0 | 5.0 | 0.6 |
| CPU 413354/G | 90 | | 105 | 11.0 | 10.0 | 7.5 | 5.0 | 0.4 |
| CPU 413354/1G | 90 | | 105 | 10.0 | 9.0 | 7.5 | 5.0 | 0.4 |
| CPU 433354/G | 90 | | 110 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 433374/G | 95 | | 110 | 11.0 | 10.0 | 7.5 | 5.0 | 0.4 |
| CPU 452374/G | 95 | | 115 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 452393/G | 100 | | 115 | 11.0 | 10.0 | 7.5 | 5.0 | 0.4 |
| CPU 472393/G | 100 | | 120 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 492413/G | 105 | | 125 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 511433/G | 110 | | 130 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 511433/1G | 110 | | 130 | 11.0 | 10.0 | 10.0 | 5.0 | 0.6 |
| CPU 511433/2G | 110 | | 130 | 14.0 | 13.0 | 10.0 | 5.0 | 0.6 |
| CPU 531452/G | 115 | | 135 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 551472/G | 120 | | 140 | 11.0 | 10.0 | 10.0 | 5.0 | 0.6 |
| CPU 551472/1G | 120 | | 140 | 14.0 | 13.0 | 10.0 | 5.0 | 0.6 |



Claron Polyseal®
Single Acting Rod Seal


Metric




CPU.../G

Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | Js 11 | +0.25 -0.00 L ₁ | Nominal L ₂ | Nominal S | Min C | Max. R ₁ |
|-----------------------|-----------------|----|-----------------|----------------------------------|---------------------------|--------------|----------|------------------------|
| | Ød ₁ | ØG | ØD ₁ | | | | | |
| CPU 590511/G | 130 | | 150 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 590551/G | 140 | | 150 | 6.7 | 6.0 | 3.5 | 3.0 | 0.3 |
| CPU 610551/G | 140 | | 155 | 10.0 | 9.0 | 7.5 | 5.0 | 0.4 |
| CPU 629551/G | 140 | | 160 | 14.0 | 13.0 | 10.0 | 5.0 | 0.6 |
| CPU 728649/G | 165 | | 185 | 13.0 | 12.0 | 10.0 | 5.0 | 0.6 |
| CPU 885787/G | 200 | | 225 | 18.0 | 16.5 | 12.5 | 5.0 | 0.6 |




ClaronPolyseal®
Single Acting Rod Seal Imperial
CPU.../G




Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | Js 11 | +0.010 -0.000 L ₁ | Nominal L ₂ | Nominal S | Min C | Max. R ₁ |
|-----------------------|-----------------|----|-----------------|------------------------------------|---------------------------|--------------|----------|------------------------|
| | Ød ₁ | ØG | ØD ₁ | | | | | |
| CPU 100060/G | 0.605 | | 1.000 | 0.275 | 0.250 | 0.197 | 0.093 | 0.016 |
| CPU 125100/G | 1.000 | | 1.250 | 0.205 | 0.187 | 0.125 | 0.093 | 0.016 |
| CPU 212175/G | 1.750 | | 2.125 | 0.280 | 0.260 | 0.187 | 0.093 | 0.016 |
| CPU 250200/G | 2.000 | | 2.500 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 275225/G | 2.250 | | 2.750 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 287237/G | 2.375 | | 2.875 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 300250/G | 2.500 | | 3.000 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 312262/G | 2.625 | | 3.125 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 325275/G | 2.750 | | 3.250 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 350300/G | 3.000 | | 3.500 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 375325/G | 3.250 | | 3.750 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 400350/G | 3.500 | | 4.000 | 0.413 | 0.380 | 0.250 | 0.125 | 0.032 |
| CPU 425350/1G | 3.500 | | 4.250 | 0.690 | 0.660 | 0.375 | 0.187 | 0.040 |
| CPU 425375/G | 3.750 | | 4.250 | 0.620 | 0.580 | 0.250 | 0.125 | 0.032 |
| CPU 462400/G | 4.000 | | 4.625 | 0.413 | 0.380 | 0.312 | 0.156 | 0.032 |
| CPU 575525/G | 5.250 | | 5.750 | 0.620 | 0.580 | 0.250 | 0.125 | 0.032 |
| CPU 612550/G | 5.500 | | 6.125 | 0.413 | 0.380 | 0.312 | 0.156 | 0.032 |
| CPU 725675/G | 6.750 | | 7.250 | 0.620 | 0.580 | 0.250 | 0.125 | 0.032 |
| CPU 750650/G | 6.500 | | 7.500 | 0.785 | 0.755 | 0.500 | 0.218 | 0.040 |
| CPU 800700/G | 7.000 | | 8.000 | 0.785 | 0.755 | 0.500 | 0.218 | 0.040 |



Claron Polyseal® Single Acting Rod Seal CPG

Metric
Imperial



Design


The Claron style CPG is an asymmetrical profiled lip seal designed for medium duty rod applications. Features include an outside diameter specifically designed for static face sealing and a robust inner lip with a secondary supporting sealing edge for high performance sealing. Manufactured in a high performance grade of Polyurethane for outstanding abrasion and extrusion resistance combined with flexibility for ease of installation.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 280 Bar | 250 Bar |
| 0.15 | 400 Bar | 350 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.
Maximum Diametral Clearance F

Pressure Bar

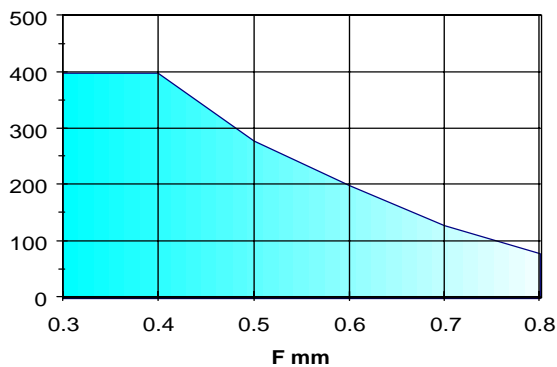

Continuous operating temperature for various fluids

| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C
The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

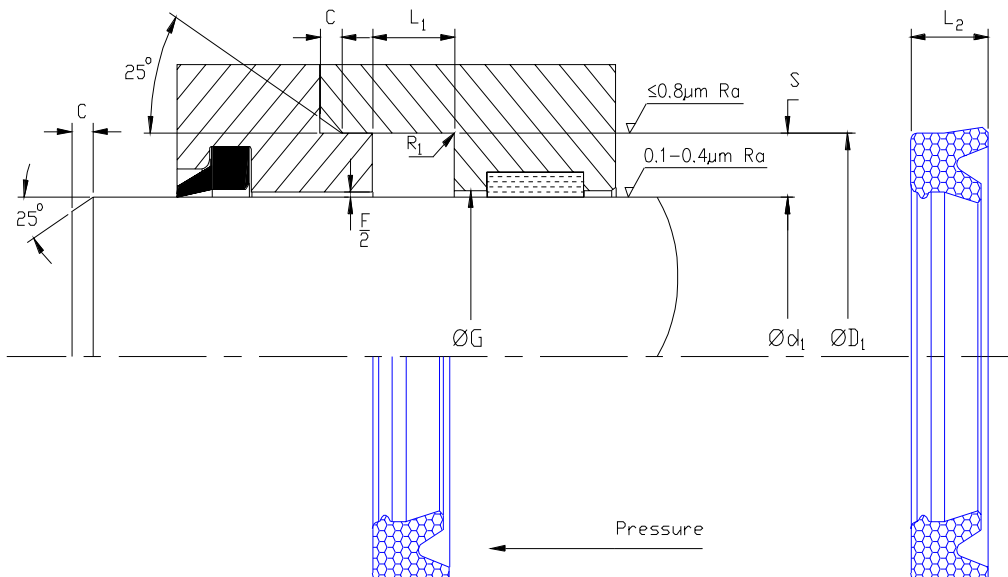




Claron Polyseal®
Single Acting Rod Seal


Metric

CPG



Nominal Dimensions & Machining Tolerances


| Claron Part Number | f8 | H9 | Js 11 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|----|-----------------|----------------|----------------|---------|-----|----------------|
| | Ød ₁ | ØG | ØD ₁ | L ₁ | L ₂ | S | C | R ₁ |
| CPG 014024 | 14 | | 24 | 8.0 | 7.3 | 5.0 | 2.5 | 0.3 |
| CPG 016022 | 16 | | 22 | 5.0 | 4.5 | 3.0 | 2.5 | 0.3 |
| CPG 022030 | 22 | | 30 | 6.3 | 5.7 | 4.0 | 2.5 | 0.3 |
| CPG 025033 | 25 | | 33 | 7.5 | 6.8 | 4.0 | 2.5 | 0.3 |
| CPG 028040 | 28 | | 40 | 9.0 | 8.0 | 6.0 | 2.5 | 0.3 |
| CPG 030040 | 30 | | 40 | 11.0 | 10.0 | 5.0 | 2.5 | 0.3 |
| CPG 030040/1 | 30 | | 40 | 7.5 | 7.0 | 5.0 | 2.5 | 0.3 |
| CPG 032040 | 32 | | 40 | 7.5 | 6.5 | 4.0 | 2.5 | 0.3 |
| CPG 032042 | 32 | | 42 | 11.0 | 10.0 | 5.0 | 2.5 | 0.3 |
| CPG 035045 | 35 | | 45 | 11.0 | 10.0 | 5.0 | 2.5 | 0.3 |
| CPG 040050 | 40 | | 50 | 11.0 | 10.0 | 5.0 | 2.5 | 0.3 |
| CPG 040055 | 40 | | 55 | 11.0 | 10.0 | 7.5 | 4.0 | 0.4 |
| CPG 045055 | 45 | | 55 | 8.0 | 7.3 | 5.0 | 2.5 | 0.3 |
| CPG 045055/1 | 45 | | 55 | 7.5 | 6.5 | 4.0 | 2.5 | 0.3 |
| CPG 045055/2 | 45 | | 55 | 11.0 | 10.0 | 5.0 | 2.5 | 0.3 |
| CPG 050060 | 50 | | 60 | 8.0 | 7.3 | 5.0 | 2.5 | 0.3 |
| CPG 050060/1 | 50 | | 60 | 11.0 | 10.0 | 5.0 | 2.5 | 0.3 |
| CPG 050065 | 50 | | 65 | 12.0 | 10.9 | 7.5 | 4.0 | 0.3 |
| CPG 055065/1 | 55 | | 65 | 9.0 | 8.2 | 5.0 | 2.5 | 0.3 |
| CPG 060075 | 60 | | 75 | 11.0 | 10.0 | 7.5 | 4.0 | 0.4 |
| CPG 065085 | 65 | | 85 | 12.5 | 11.4 | 10.0 | 4.0 | 0.4 |
| CPG 070085 | 70 | | 85 | 12.5 | 11.4 | 7.5 | 4.0 | 0.4 |



Claron Polyseal®
Single Acting Rod Seal

Imperial

CPG





Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 H9 Ød ₁ ØG | Js 11 ØD ₁ | +0.010 -0.000 L ₁ | Nominal L ₂ | Nominal S | Min C | Max. R ₁ |
|-----------------------|-----------------------------|--------------------------|------------------------------------|---------------------------|--------------|----------|------------------------|
| CPG 10001250 | 1.000 | 1.250 | 0.207 | 0.187 | 0.125 | 0.093 | 0.010 |
| CPG 11251375 | 1.125 | 1.375 | 0.207 | 0.187 | 0.125 | 0.093 | 0.016 |
| CPG 12501500 | 1.250 | 1.500 | 0.275 | 0.250 | 0.125 | 0.093 | 0.010 |
| CPG 12501625/2 | 1.250 | 1.625 | 0.275 | 0.250 | 0.187 | 0.093 | 0.016 |
| CPG 12501625/1 | 1.250 | 1.625 | 0.207 | 0.187 | 0.187 | 0.093 | 0.016 |
| CPG 12501625 | 1.250 | 1.625 | 0.300 | 0.280 | 0.187 | 0.093 | 0.016 |
| CPG 12501750 | 1.250 | 1.750 | 0.413 | 0.315 | 0.250 | 0.125 | 0.020 |
| CPG 13751750 | 1.375 | 1.750 | 0.375 | 0.341 | 0.187 | 0.093 | 0.016 |
| CPG 15001750 | 1.500 | 1.750 | 0.275 | 0.250 | 0.125 | 0.093 | 0.010 |
| CPG 15001875 | 1.500 | 1.875 | 0.275 | 0.250 | 0.187 | 0.093 | 0.016 |
| CPG 15002000/1 | 1.500 | 2.000 | 0.275 | 0.250 | 0.250 | 0.125 | 0.020 |
| CPG 15002000 | 1.500 | 2.000 | 0.413 | 0.375 | 0.250 | 0.125 | 0.020 |
| CPG 16252000 | 1.625 | 2.000 | 0.413 | 0.375 | 0.187 | 0.093 | 0.016 |
| CPG 17502125 | 1.750 | 2.125 | 0.275 | 0.250 | 0.187 | 0.093 | 0.016 |
| CPG 17502250/1 | 1.750 | 2.250 | 0.275 | 0.250 | 0.250 | 0.125 | 0.020 |
| CPG 17502250 | 1.750 | 2.250 | 0.413 | 0.375 | 0.250 | 0.125 | 0.020 |
| CPG 20002500 | 2.000 | 2.500 | 0.413 | 0.375 | 0.250 | 0.125 | 0.020 |
| CPG 20002500/1 | 2.000 | 2.500 | 0.275 | 0.250 | 0.250 | 0.093 | 0.020 |
| CPG 22502625 | 2.250 | 2.625 | 0.207 | 0.187 | 0.187 | 0.093 | 0.016 |
| CPG 25003000 | 2.500 | 3.000 | 0.275 | 0.250 | 0.250 | 0.125 | 0.020 |
| CPG 25003125 | 2.500 | 3.125 | 0.550 | 0.500 | 0.312 | 0.216 | 0.046 |
| CPG 30003750 | 3.000 | 3.750 | 0.688 | 0.625 | 0.375 | 0.187 | 0.046 |

Claron[®] Polyseal[®]

Single Acting Rod Seal Metric

CPS



Design

The Claron style CPS is a symmetrical profiled semi-solid seal designed for narrow section rod sealing and manufactured in a high performance grade of polyurethane. The sealing lips are machine trimmed to ensure dimensional consistency and good low pressure sealing whilst polyurethane exhibits outstanding abrasion and extrusion resistance providing a rod seal with a consistent operating performance.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 280 Bar | 250 Bar |
| 0.15 | 400 Bar | 350 Bar |


Continuous operating temperature for various fluids

| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

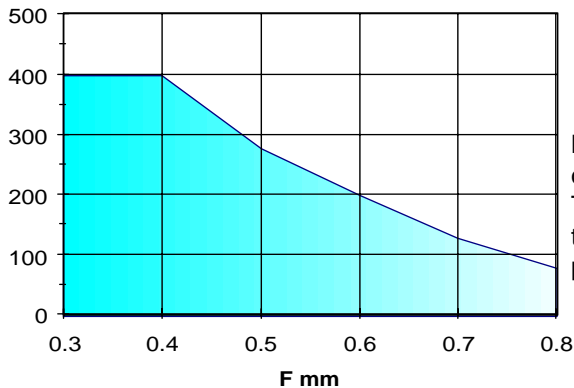


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C . The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to $F/2$ thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

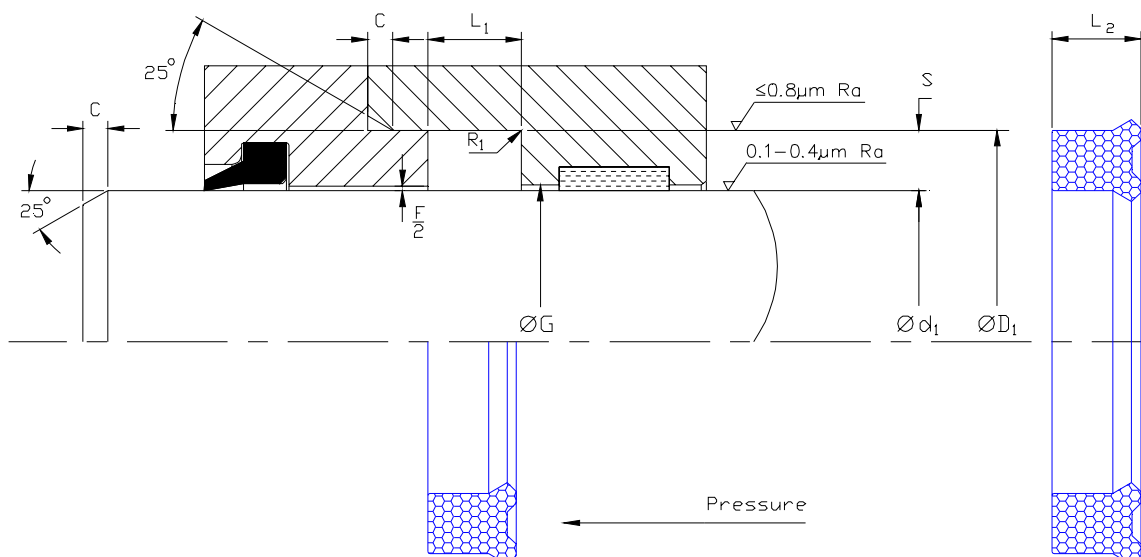





ClaronPolyseal®
Single Acting Rod Seal Metric
CPS



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | H10 | +0.25 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|----|-----------------|-------------------------|----------------|---------|-----|----------------|
| | Ød ₁ | ØG | ØD ₁ | -0.00 L ₁ | L ₂ | S | C | R ₁ |
| CPS 022028 | 22 | | 28 | 5.5 | 4.5 | 3.0 | 3.0 | 0.20 |
| CPS 030038 | 30 | | 38 | 9.0 | 8.0 | 4.0 | 3.0 | 0.20 |
| CPS 038045 | 38 | | 45 | 7.0 | 6.0 | 3.5 | 3.0 | 0.20 |
| CPS 045053 | 45 | | 53 | 9.0 | 8.0 | 4.0 | 3.0 | 0.20 |
| CPS 050058 | 50 | | 58 | 9.0 | 8.0 | 4.0 | 3.0 | 0.20 |
| CPS 060066 | 60 | | 66 | 6.0 | 5.0 | 3.0 | 3.0 | 0.20 |



CPU.../OR

Design


The Claron style CPU.../OR is a symmetrical profiled lip seal designed for rod sealing, manufactured in a high performance grade of Polyurethane and fitted with an NBR O-Ring. This special feature guarantees the pre-loading of the sealing lips at no load and low pressures whilst polyurethane provides outstanding abrasion and extrusion resistance.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 280 Bar | 250 Bar |
| 0.15 | 400 Bar | 350 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F Pressure Bar

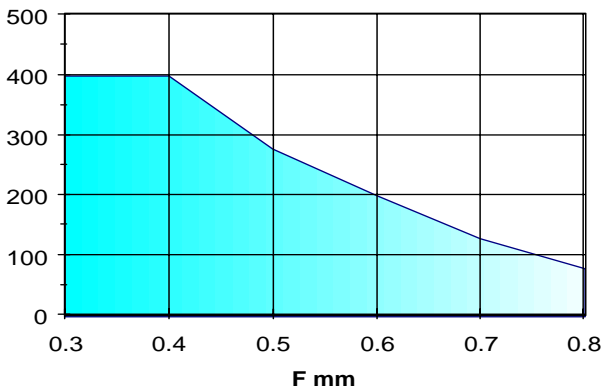

Continuous operating temperature for various fluids

| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.


Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

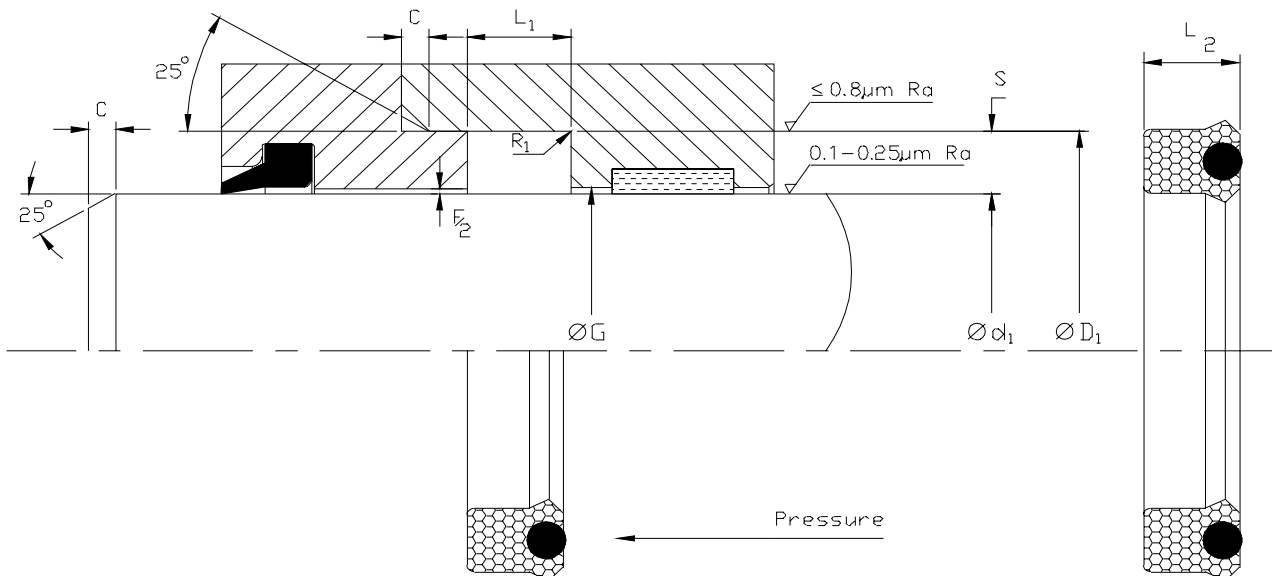




ClaronPolyseal®
Single Acting Rod Seal Metric




CPU.../OR

Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | H10 | +0.25 -0.00 L ₁ | Nominal L ₂ | Nominal S | Min C | Max. R ₁ |
|-----------------------|-----------------|----|-----------------|----------------------------------|---------------------------|--------------|----------|------------------------|
| | Ød ₁ | ØG | ØD ₁ | | | | | |
| CPU 118078/OR | 20 | | 30 | 8.0 | 7.0 | 5.0 | 3.5 | 0.3 |
| CPU129098/OR | 25 | | 33 | 6.3 | 5.7 | 4.0 | 3.0 | 0.2 |
| CPU 137098/OR | 25 | | 35 | 8.0 | 7.0 | 5.0 | 3.5 | 0.3 |
| CPU 157118/1FOR | 30 | | 40 | 6.3 | 5.7 | 5.0 | 3.5 | 0.3 |
| CPU 157118/OR | 30 | | 40 | 7.7 | 7.0 | 5.0 | 3.5 | 0.3 |
| CPU 177137/OR | 35 | | 45 | 8.0 | 7.0 | 5.0 | 3.5 | 0.3 |
| CPU 196157/1OR | 40 | | 50 | 7.7 | 7.0 | 5.0 | 3.5 | 0.3 |
| CPU 236196/OR | 50 | | 60 | 8.0 | 7.0 | 5.0 | 3.5 | 0.3 |
| CPU 255196/OR | 50 | | 65 | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPU 295236/OR | 60 | | 75 | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPU 314255/OR | 65 | | 80 | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPU 314275/OR | 70 | | 80 | 12.5 | 11.4 | 5.0 | 3.5 | 0.3 |
| CPU 334275/OR | 70 | | 85 | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPU 433354/OR | 90 | | 110 | 12.5 | 11.4 | 10.0 | 6.5 | 0.6 |





ClaronPolyseal®
Single Acting Rod Seal Imperial



CPU.../OR

Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | H10 | +0.010 -0.000 L ₁ | Nominal L ₂ | Nominal S | Min C | Max. R ₁ |
|-----------------------|-----------------|----|-----------------|------------------------------------|---------------------------|--------------|----------|------------------------|
| | Ød ₁ | ØG | ØD ₁ | | | | | |
| CPU 250187/OR | 1.875 | | 2.500 | 0.452 | 0.437 | 0.312 | 0.156 | 0.020 |
| CPU 262200/OR | 2.000 | | 2.625 | 0.475 | 0.437 | 0.312 | 0.156 | 0.032 |
| CPU 275200/OR | 2.000 | | 2.750 | 0.520 | 0.500 | 0.375 | 0.187 | 0.020 |
| CPU 375300/OR | 3.000 | | 3.750 | 0.520 | 0.500 | 0.375 | 0.187 | 0.020 |
| CPU 375300/1OR | 3.000 | | 3.750 | 0.582 | 0.562 | 0.375 | 0.187 | 0.020 |
| CPU 462400/OR | 4.000 | | 4.625 | 0.413 | 0.375 | 0.312 | 0.156 | 0.032 |
| CPU 600525/OR | 5.250 | | 6.000 | 0.413 | 0.375 | 0.375 | 0.187 | 0.020 |



Design

Claron style CPUI.../OR is a Polyurethane U-seal incorporating an O-Ring energiser. This guarantees the pre-loading of the seal lips for low pressure sealing, thus optimising seal performance. Polyurethane provides outstanding abrasion and wear resistance ensuring that the seal operates in the most arduous conditions. The anti-extrusion ring which is energised at high pressures, increases the maximum working pressure as well as protecting the seal against pressure spikes.


Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 350 Bar | 300 Bar |
| 0.15 | 500 Bar | 450 Bar |

These range parameters are Maximum simultaneous conditions.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F
Pressure Bar

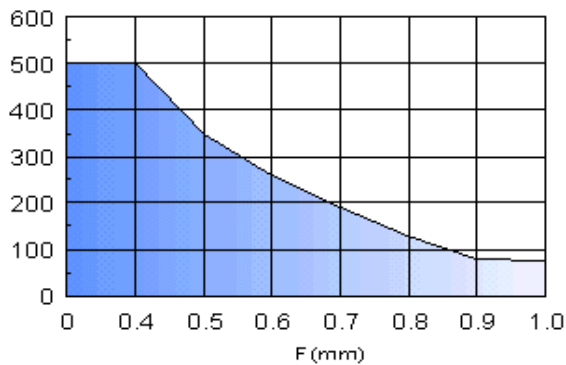

Continuous operating temperature for various fluids

| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.



Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

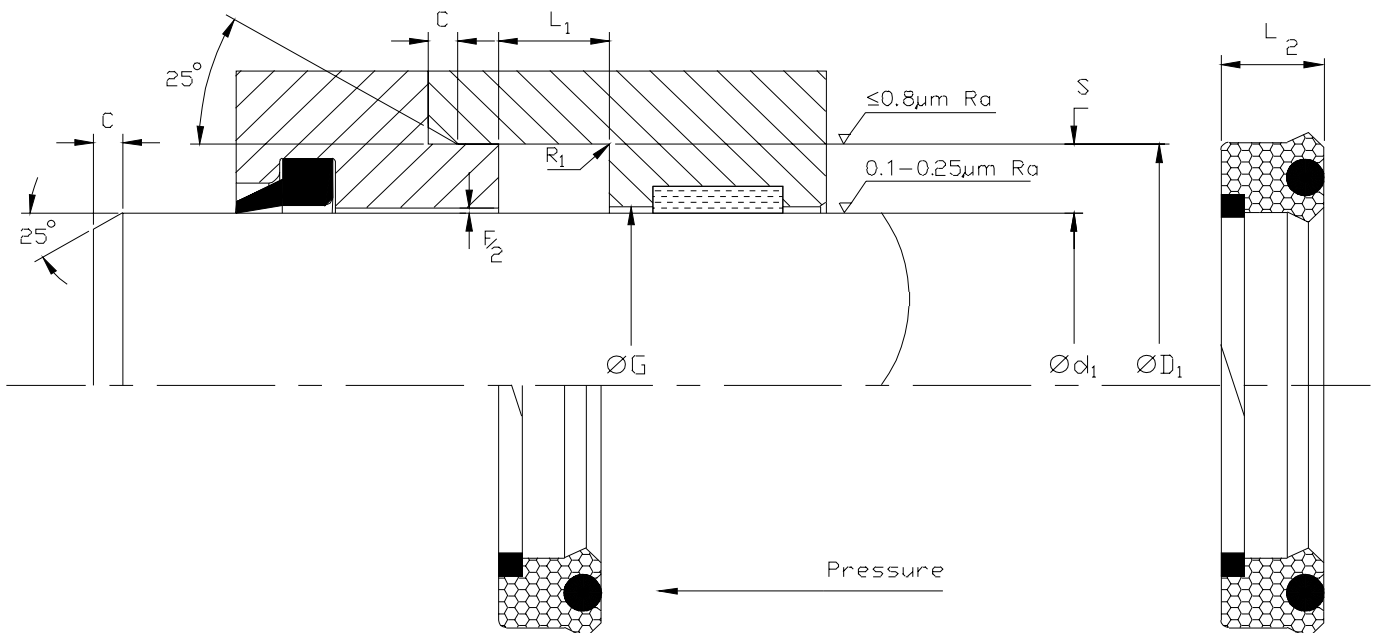





CPUI.../OR

Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | H10 | +0.25 -0.00 L ₁ | Nominal L ₂ | Nominal S | Min C | Max. R ₁ |
|-----------------------|-----------------|----|-----------------|----------------------------------|---------------------------|--------------|----------|------------------------|
| | Ød ₁ | ØG | ØD ₁ | | | | | |
| CPUI 216157/OR | 40 | | 55 | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPUI 255196/OR | 50 | | 65 | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPUI 295236/OR | 60 | | 75 | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPUI 314255/OR | 65 | | 80 | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPUI 413354/OR | 90 | | 105 | 12.5 | 11.3 | 7.5 | 5.0 | 0.4 |
| CPUI 433354/OR | 90 | | 110 | 12.5 | 11.3 | 10.0 | 6.5 | 0.6 |

CPGI.../OR



Design

The seal is an asymmetric Polyurethane U-seal incorporating an NBR energiser pre-loading the seal lips thus improving sealing at low pressures. The secondary sealing lip assists sealing, reduces friction and helps to protect the main lip from damage caused by dirt ingress. The Anti-extrusion ring which is energised at high pressures increases the maximum working pressure as well as protecting the seal against pressure spikes caused by shock loads. Polyurethane exhibits outstanding abrasion and wear resistance ensuring that the seal operates in the most arduous conditions.

Operating Conditions


| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 350 Bar | 300 Bar |
| 0.15 | 500 Bar | 450 Bar |

Continuous operating temperature for various fluids

| Polyurethane / Nitrile Composite | | |
|----------------------------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | NS |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

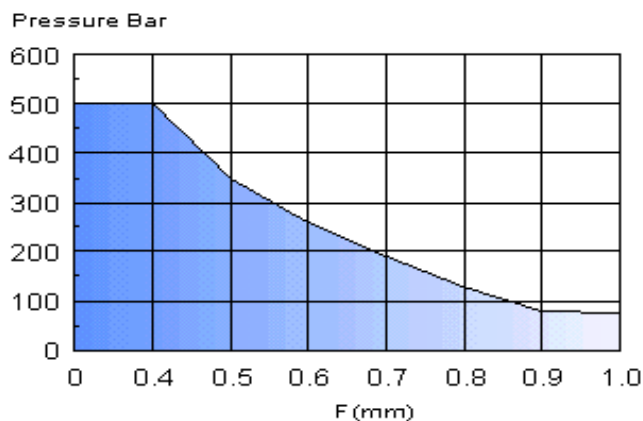


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

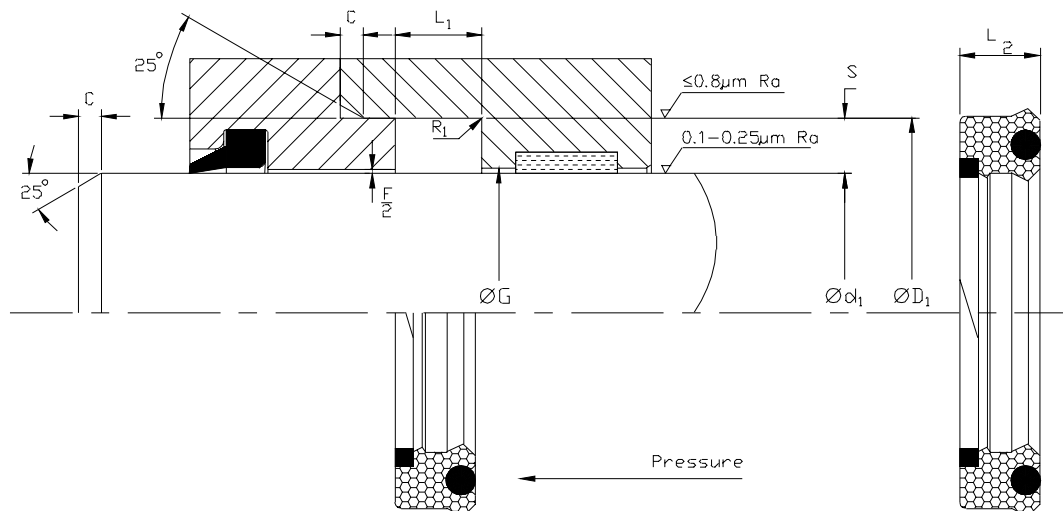




ClaronPolyseal®
Single Acting Rod Seal



Metric

CPGI.../OR



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H10 | H9 | +0.25 -0.00 | Nominal | Nominal | Min | Max. |
|-----------------------|-----------------|-----------------|----|----------------|----------------|---------|-----|----------------|
| | Ød ₁ | ØD ₁ | ØG | L ₁ | L ₂ | S | C | R ₁ |
| CPGI 065080/OR | 65 | 80 | | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPGI 070085/OR | 70 | 85 | | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPGI 075090/OR | 75 | 90 | | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPGI 080095/OR | 80 | 95 | | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPGI 085100/OR | 85 | 100 | | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPGI 090105/OR | 90 | 105 | | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPGI 095110/OR | 95 | 110 | | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |
| CPGI 100115/OR | 100 | 115 | | 12.5 | 11.4 | 7.5 | 5.0 | 0.4 |



Design


Claron style HBI is a single acting seal for gland applications using the same housing designs as Style CS6. The sealing element is manufactured in Polyurethane, with an Acetal anti-extrusion ring. Designed as a high pressure, low friction seal for use in second generation tandem sealing arrangements. The HBI seal is used on the pressure side, and a 'low leak' but higher friction seal on the non-pressure side to collect the oil film during the positive stroke. This type of arrangement is used where both low friction and low leakage are required. The seals high pressure resistance makes it suitable for use in heavy duty applications where shock loads and pressure spikes occur, as found in mobile plant equipment.

Operating Conditions

| Maximum Pressure | | |
|------------------|---------------|----------------|
| Max Speed | Temp. Range | Temp. Range |
| m/s | -40°C to 80°C | -40°C to 110°C |
| 0.50 | 350 Bar | 300 Bar |
| 0.15 | 500 Bar | 450 Bar |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

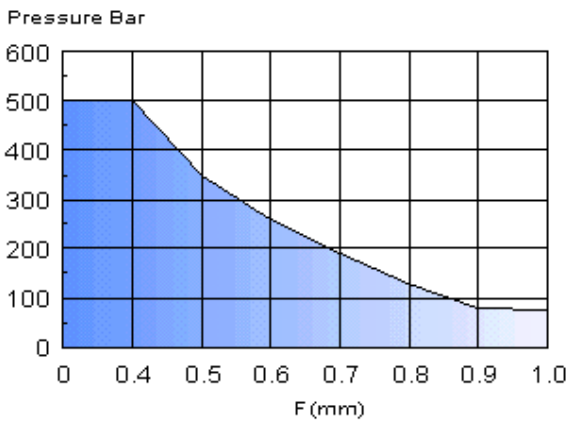

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 100°C The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal.

Continuous operating temperature for various fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |



Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.


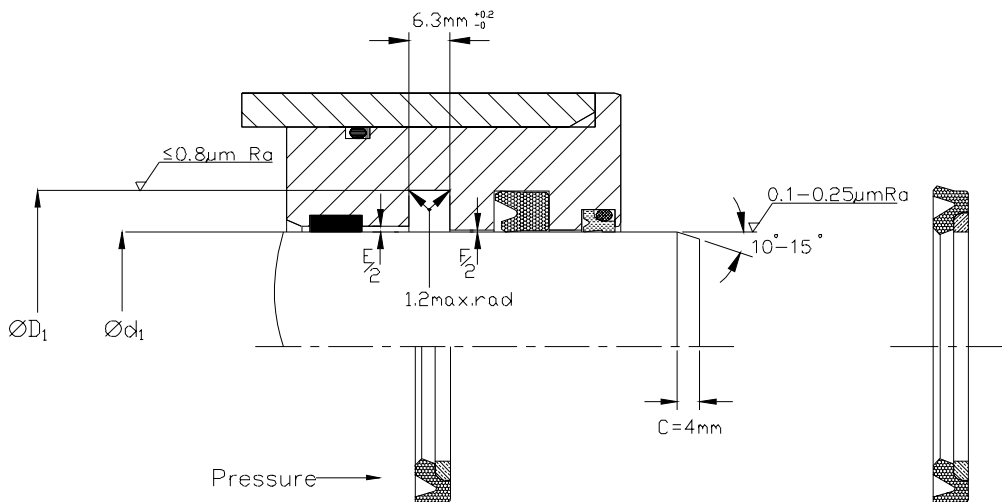




Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 Ød ₁ | H9 ØD ₁ | +0.20 -0.00 L ₁ | Nominal C |
|--------------------|-----------------------|-----------------------|----------------------------------|--------------|
| HBI 065 | 65 | 80.5 | 6.3 | 4 |
| HBI 070 | 70 | 85.5 | 6.3 | 4 |
| HBI 075 | 75 | 90.5 | 6.3 | 4 |
| HBI 080 | 80 | 95.5 | 6.3 | 4 |
| HBI 085 | 85 | 100.5 | 6.3 | 4 |
| HBI 090 | 90 | 105.5 | 6.3 | 4 |
| HBI 095 | 95 | 110.5 | 6.3 | 4 |
| HBI 100 | 100 | 115.5 | 6.3 | 4 |
| HBI 140 | 140 | 155.5 | 6.3 | 4 |

Items in **BOLD** are to suit ISO7425-2 housings.



Design

Claron Composite Seals **Style CS6** are designed as high pressure, low friction **Single-acting** Rod seals for use in heavy duty hydraulic and pneumatic cylinders.

Claron Composite Seals **Style 741** and **Style 751** are designed as high pressure, low friction **Double-acting** Rod seals using the same housing designs as **Style CS6**. (These styles must be used in conjunction with single acting wiper seals, as Style 931). The inclusion of radial grooves on the P.T.F.E. element, from 20mm diameter onwards allows rapid response to bi-directional pressure changes.

Claron Composite Seals **Style 741** is specifically designed for minimum leakage and slow rotary applications. Housing sizes and tolerances are identical to **Style CS6**

Materials

Standard materials are Bronze filled P.T.F.E with a Nitrile O-Ring Energiser but both the outer sealing element and the energiser are available in a wide range of high performance materials to suit a variety of applications. The application parameters should be carefully considered prior to selecting suitable materials from the tables shown in Appendix 2. Consult Claron for further advice.

Operating Range

Temp. -54°C to 200°C (Dependent upon O-Ring Material used see Appendix)

Pressure upto 800 bar

Velocity upto 15m/s

These range parameters are maximum conditional values.

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps.

Refer to Appendix 1 for further information.

Operating Conditions

Maximum Working Pressure for "Standard" seal applications using specified tolerances.


Temp. range
-30°C to 80°C
400bar



Temp. range
80°C to 120°C
350 bar

Diametrical Clearance F

Shown in the graph to the right is calculated as the maximum permissible extrusion gap, allowing for movement due to side load, for various pressures and temperatures upto 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the **Radial clearance** to a value nearer to F/2 thus increasing the pressure capability of the seal.

The maximum seal extrusion gap should be calculated allowing for all tolerances and movement due to side load. For pressures > 400 bar, the seal extrusion gap should be reduced by utilising smaller tolerances. e.g H8 for Housing bore and f8 for Rod diameter.

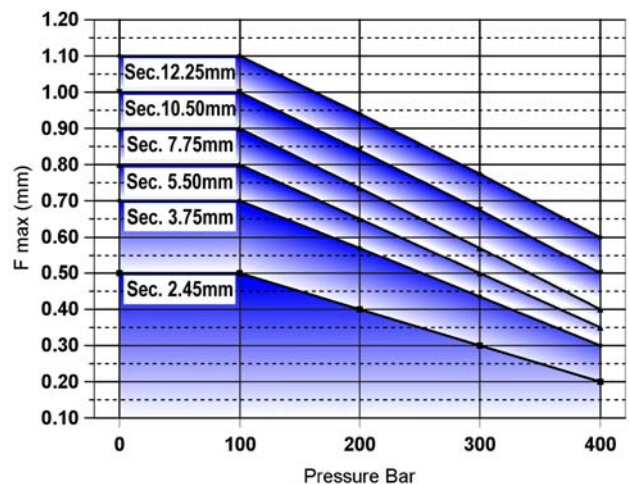



Range Of Installation Dimensions

The full range of diameters applicable to the "Standard", "Light" and "Heavy" Duty Sections are shown in the table below

| Housing | | Rod dia. | | |
|---------|-------|--------------|--------------|--------------|
| Section | Width | Standard | Light (/1) | Heavy (/2) |
| 2.5 | 2.2 | 3 to 7.9 | 8 to 18.9 | |
| 3.75 | 3.2 | 8 to 18.9 | 19 to 37.9 | |
| 5.5 | 4.2 | 19 to 37.9 | 38 to 199.9 | 8 to 18.9 |
| 7.75 | 6.3 | 38 to 199.9 | 200 to 255.9 | 19 to 37.9 |
| 10.5 | 8.1 | 200 to 255.9 | 256 to 550 | 38 to 199.9 |
| 12.25 | 8.1 | 256 to 550 | | 200 to 255.9 |

**Split grooves should be utilised for Rod Diameters < 19mm
For closed grooves 19 to 38mm use Light Duty Section only**

How To Order


When ordering, prefix the size reference with the style required and use the suffix shown in the material application tables.

- e.g. CS6 Standard section in Bronze filled material for 70mm Rod **CS60700/B**
- CS6 Light duty section in Glass filled material for 70 mm Rod **CS60700/1G**
- 741 Heavy duty section in Carbon filled material for 70 mm Rod **741-0700/2C**

For O-Ring energiser materials other than Nitrile, use suffix shown in material table.
e.g. Fluorocarbon material (FKM), **CS60700/B/FKM**

Housing

For surface finish and lead in chamfers refer to the illustration below. For Housing dimensions and tolerances refer to the table of recommended sizes.

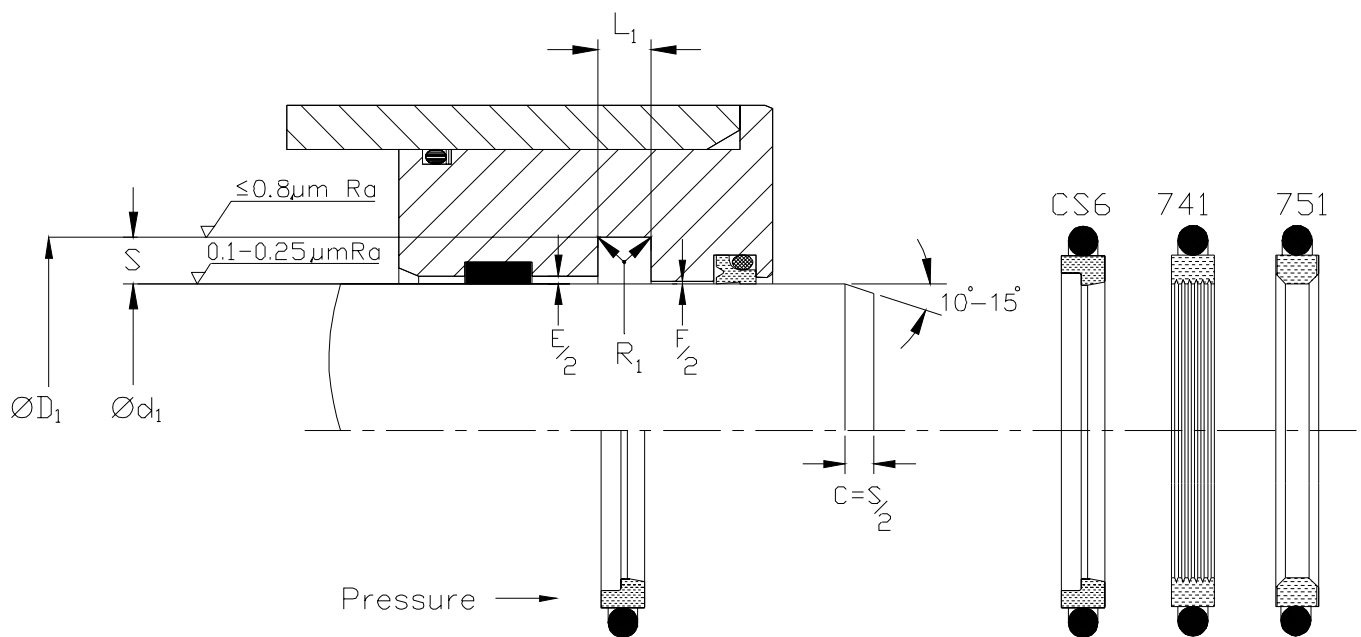


For F/2 values see note and tables

For E/2 values refer to P.T.F.E. Guide Tape

Fitting

For the seal to function correctly it is important that care is taken during fitting. For details refer to Appendix 3.




ClaronPolyseal®

Single & Double Acting Rod Seals

Metric


741 751 CS6



Nominal Dimensions & Machining Tolerances

| Claron Part Number | d ₁ f8 | D ₁ H9 | L ₁ +0.2 -0.0 | S SECT | R ₁ MAX | F/2 MAX |
|--------------------|----------------------|----------------------|--------------------------------|-------------|-----------------------|------------|
| CS60030/B | 3.00 | 8.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60040/B | 4.00 | 9.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60050/B | 5.00 | 10.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60060/B | 6.00 | 11.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60063/B | 6.30 | 11.30 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60080/1B | 8.00 | 13.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60080/B | 8.00 | 15.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60100/1B | 10.00 | 15.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60100/B | 10.00 | 17.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60120/1B | 12.00 | 17.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60120/B | 12.00 | 19.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60140/1B | 14.00 | 19.00 | 2.20 | 2.50 | 0.30 | 0.20 |
| CS60140/B | 14.00 | 21.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60150/B | 15.00 | 22.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60160/B | 16.00 | 23.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60180/B | 18.00 | 25.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60200/1B | 20.00 | 27.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60200/B | 20.00 | 31.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60220/1B | 22.00 | 29.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60220/B | 22.00 | 33.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60250/1B | 25.00 | 32.50 | 3.20 | 3.75 | 0.50 | 0.30 |
| CS60250/B | 25.00 | 36.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60280/B | 28.00 | 39.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60300/B | 30.00 | 41.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60320/B | 32.00 | 43.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60350/B | 35.00 | 46.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60360/B | 36.00 | 47.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60400/1B | 40.00 | 51.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60400/B | 40.00 | 55.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60420/1B | 42.00 | 53.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60420/B | 42.00 | 57.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60450/1B | 45.00 | 56.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60450/B | 45.00 | 60.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60480/1B | 48.00 | 59.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60480/B | 48.00 | 63.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60500/1B | 50.00 | 61.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60500/B | 50.00 | 65.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60520/1B | 52.00 | 63.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60520/B | 52.00 | 67.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60550/1B | 55.00 | 66.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60550/B | 55.00 | 70.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60560/1B | 56.00 | 67.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60560/B | 56.00 | 71.50 | 6.30 | 7.75 | 1.20 | 0.40 |

Items in **BOLD** are to suit ISO7425-2 Housings



741

751


CS6

ClaronPolyseal®

Single & Double Acting Rod Seals

Metric


741 751 CS6




Nominal Dimensions & Machining Tolerances

| Claron Part Number | d ₁ f8 | D ₁ H9 | L ₁ +0.2 -0.0 | S SECT | R ₁ MAX | F/2 MAX |
|--------------------|----------------------|----------------------|--------------------------------|--------------|-----------------------|------------|
| CS60600/1B | 60.00 | 71.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60600/B | 60.00 | 75.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60630/1B | 63.00 | 74.00 | 4.20 | 5.50 | 0.80 | 0.35 |
| CS60630/B | 63.00 | 78.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60650/B | 65.00 | 80.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60700/B | 70.00 | 85.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60750/B | 75.00 | 90.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60762/B | 76.20 | 91.70 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60800/B | 80.00 | 95.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60850/B | 85.00 | 100.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60900/B | 90.00 | 105.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS60950/B | 95.00 | 110.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61000/B | 100.00 | 115.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| | f8 | H8 | +0.2-0 | SECT | MAX | MAX |
| CS61050/B | 105.00 | 120.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61100/B | 110.00 | 125.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61150/B | 115.00 | 130.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61200/B | 120.00 | 135.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61250/B | 125.00 | 140.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61300/B | 130.00 | 145.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61350/B | 135.00 | 150.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61400/B | 140.00 | 155.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61500/B | 150.00 | 165.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61600/B | 160.00 | 175.00 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61600/2B | 160.00 | 181.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS61700/B | 170.00 | 185.50 | 6.30 | 7.75 | 1.50 | 0.50 |
| CS61800/B | 180.00 | 195.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS61800/2B | 180.00 | 201.00 | 8.10 | 10.50 | 1.20 | 0.40 |
| CS61900/B | 190.00 | 205.50 | 6.30 | 7.75 | 1.20 | 0.40 |
| CS62000/B | 200.00 | 221.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS62100/B | 210.00 | 231.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS62200/B | 220.00 | 241.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS62300/B | 230.00 | 251.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS62400/B | 240.00 | 261.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS62500/B | 250.00 | 271.00 | 8.10 | 10.50 | 1.50 | 0.50 |
| CS62800/B | 280.00 | 304.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS63000/B | 300.00 | 324.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS63200/B | 320.00 | 344.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS63500/B | 350.00 | 374.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS63600/B | 360.00 | 384.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS64000/B | 400.00 | 424.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS64200/B | 420.00 | 444.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS64500/B | 450.00 | 474.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS64800/B | 480.00 | 504.50 | 8.10 | 12.25 | 1.50 | 0.60 |
| CS65000/B | 500.00 | 524.50 | 8.10 | 12.25 | 1.50 | 0.60 |

Items in **BOLD** are to suit ISO7425-2 Housings



CS1 CS3



Design

Claron composite seals styles CS1 and CS 3 are designed for use in light duty hydraulic or pneumatic rod applications. Style CS1 covers the range of imperial sizes, and the CS3 metric sizes. For advice on installation, refer to Appendix.

Materials

Claron composite seals style CS1 and CS3 as standard comprise of a Virgin PTFE inner sleeve and are energised by a 75° shore hardness Nitrile rubber O-Ring. A full range of materials are available to suit a variety of applications. See tables in Appendix.

Operating Conditions

Maximum Working Pressure for "Standard" seal applications using specified tolerances.

Temp Range: -40°C to +120°C (Dependent upon energiser material. See Appendix)

Max. Pressure: 350 Bar

Max. Linear Speed: 15m/s


These range parameters are maximum conditional values

Optimum service conditions are affected by temperature, speed pressure, surface finish and extrusion gaps..

Refer to Appendix 1 for further information.

Diametral Clearance 'F'

'F' shown in the size tables is based upon Virgin P.T.F.E., temperatures up to 80°C and 350 Bar pressure in designs where PTFE guide tape is utilised. For other pressures, refer to the graph shown below.

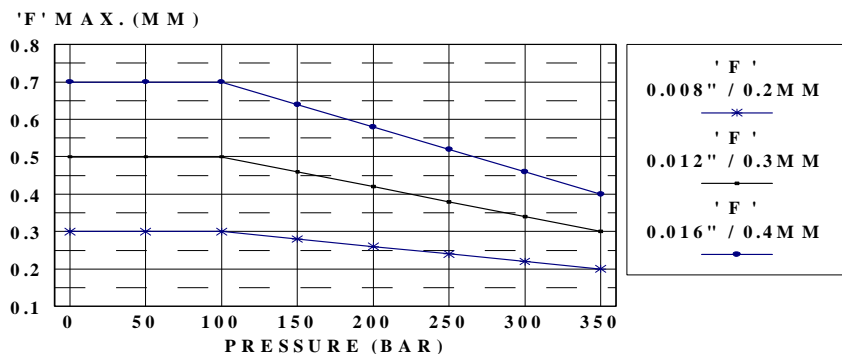


To use this graph, refer to the tables on page for the max. value of 'F' at 350 Bar then apply the relevant curve for the various pressures.

The maximum extrusion gap 'F/2' should be calculated allowing for all movements due to tolerances, side-loads and cylinder expansion.


How To Order

When ordering, quote the size reference shown on the dimensions table.

If an energiser material other than the standard nitrile type is required, consult Claron for the part number to be used.

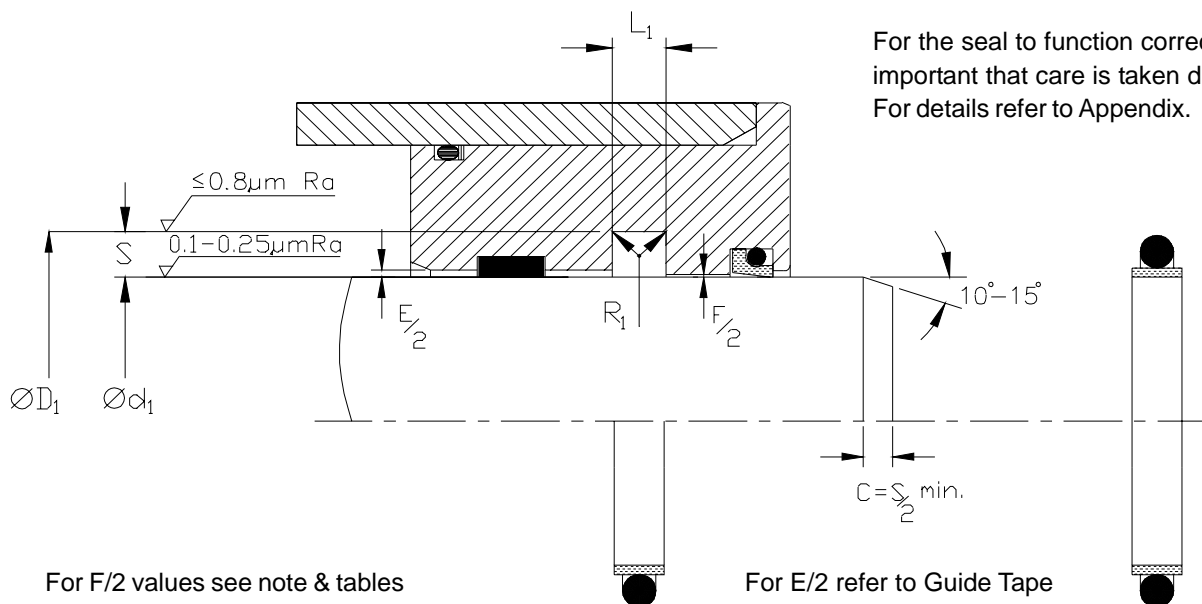

For the seal to function correctly it is important that care is taken during fitting. For details refer to Appendix.



CS 1 Imperial
CS 3 Metric

ClaronPolyseal®
Double Acting Rod Seals



CS 1 Imperial Sizes



CS 3 Metric Sizes

Nominal Dimensions & Machining Tolerances

Nominal Dimensions & Machining Tolerances

| Claron | h9 Ød ₁ | ±0.003 L ₁ | S | Tol. On S | Max R ₁ | Max 350 Bar F | Claron | h9 Ød ₁ | ±0.075 L ₁ | S | Tol. On S | Max R ₁ | Max 350 Bar F |
|------------|-----------------------|--------------------------|-------|-----------------|-----------------------|---------------------|---------|-----------------------|--------------------------|------|-----------------|-----------------------|---------------------|
| CS 10025 | 0.250 | 0.094 | 0.080 | +0.002 -0 | 0.010 | 0.008 | CS 3007 | 7 | 3.60 | 3.00 | +0.075 -0 | 0.50 | 0.20 |
| CS 10031 | 0.312 | | | | | | CS 3008 | 8 | | | | | |
| CS 10037 | 0.375 | CS 3009 | 9 | | | | | | | | | | |
| CS 10043 | 0.437 | CS 3010 | 10 | | | | | | | | | | |
| CS 10050 | 0.500 | 0.141 | 0.111 | +0.003 -0 | 0.020 | 0.008 | CS 3011 | 11 | | | | | |
| CS 10056 | 0.562 | | | | | | CS 3012 | 12 | | | | | |
| CS 10062 | 0.625 | | | | | | CS 3013 | 13 | | | | | |
| CS 10068 | 0.687 | | | | | | CS 3014 | 14 | | | | | |
| CS 10075 | 0.750 | | | | | | CS 3015 | 15 | | | | | |
| CS 10081 | 0.812 | | | | | | CS 3016 | 16 | | | | | |
| CS 10087 | 0.875 | | | | | | CS 3017 | 17 | | | | | |
| CS 10093 | 0.937 | 0.188 | 0.152 | +0.004 -0 | 0.030 | 0.008 | CS 3018 | 18 | | | | | |
| CS 10100 | 1.000 | | | | | | CS 3020 | 20 | | | | | |
| CS 10106 | 1.062 | | | | | | CS 3022 | 22 | | | | | |
| CS 10112 | 1.125 | | | | | | CS 3023 | 23 | | | | | |
| CS 10118 | 1.187 | | | | | | CS 3024 | 24 | | | | | |
| CS 10125 | 1.250 | | | | | | CS 3025 | 25 | | | | | |
| CS 10131 | 1.312 | | | | | | CS 3026 | 26 | | | | | |
| CS 10137 | 1.375 | | | | | | CS 3027 | 27 | | | | | |
| CS 10143 | 1.437 | | | | | | CS 3028 | 28 | | | | | |
| CS 10150/1 | 1.500 | | | | | | CS 3029 | 29 | | | | | |
| CS 10156 | 1.562 | | | | | | CS 3030 | 30 | | | | | |
| CS 10168 | 1.687 | CS 3031 | 31 | | | | | | | | | | |
| CS 10150 | 1.500 | 0.281 | 0.244 | +0.004 -0 | 0.040 | 0.012 | CS 3032 | 32 | | | | | |
| CS 10162 | 1.625 | | | | | | CS 3033 | 33 | | | | | |
| CS 10175 | 1.750 | | | | | | CS 3034 | 34 | | | | | |
| CS 10187 | 1.875 | | | | | | CS 3035 | 35 | | | | | |
| CS 10200 | 2.000 | | | | | | CS 3036 | 36 | | | | | |
| CS 10212 | 2.125 | | | | | | CS 3037 | 37 | | | | | |
| CS 10225 | 2.250 | | | | | | CS 3038 | 38 | | | | | |
| CS 10237 | 2.375 | | | | | | CS 3039 | 39 | | | | | |
| CS 10250 | 2.500 | | | | | | CS 3040 | 40 | | | | | |
| CS 10262 | 2.625 | | | | | | CS 3041 | 41 | | | | | |
| CS 10275 | 2.750 | | | | | | CS 3042 | 42 | | | | | |
| CS 10287 | 2.875 | | | | | | CS 3043 | 43 | | | | | |
| CS 10300 | 3.000 | | | | | | CS 3044 | 44 | | | | | |
| CS 10312 | 3.125 | | | | | | CS 3045 | 45 | | | | | |
| CS 10325 | 3.250 | | | | | | CS 3050 | 50 | | | | | |
| CS 10337 | 3.375 | CS 3053 | 53 | | | | | | | | | | |
| CS 10350 | 3.500 | CS 3055 | 55 | | | | | | | | | | |
| CS 10362 | 3.625 | CS 3056 | 56 | | | | | | | | | | |
| CS 10375 | 3.750 | CS 3060 | 60 | | | | | | | | | | |
| CS 10387 | 3.875 | CS 3063 | 63 | | | | | | | | | | |
| CS 10400 | 4.000 | CS 3065 | 65 | | | | | | | | | | |
| CS 10412 | 4.125 | 0.375 | 0.328 | +0.005 -0 | 0.040 | 0.016 | CS 3070 | 70 | | | | | |
| CS 10425 | 4.250 | | | | | | CS 3075 | 75 | | | | | |
| CS 10437 | 4.375 | | | | | | CS 3080 | 80 | | | | | |
| CS 10450 | 4.500 | | | | | | CS 3085 | 85 | | | | | |
| CS 10462 | 4.625 | | | | | | CS 3090 | 90 | | | | | |
| CS 10475 | 4.750 | | | | | | CS 3095 | 95 | | | | | |
| CS 10487 | 4.875 | | | | | | CS 3100 | 100 | | | | | |
| CS 10500 | 5.000 | | | | | | CS 3105 | 105 | | | | | |
| CS 10512 | 5.125 | | | | | | CS 3110 | 110 | | | | | |
| CS 10525 | 5.250 | | | | | | CS 3120 | 120 | | | | | |
| CS 10537 | 5.375 | CS 3125 | 125 | | | | | | | | | | |
| CS 10550 | 5.500 | CS 3130 | 130 | | | | | | | | | | |
| CS 10562 | 5.625 | 0.950 | 8.40 | +0.10 -0 | 1.00 | 0.40 | CS 3135 | 135 | | | | | |
| CS 10575 | 5.750 | | | | | | CS 3140 | 140 | | | | | |
| CS 10587 | 5.875 | | | | | | CS 3145 | 145 | | | | | |
| CS 10600 | 6.000 | | | | | | CS 3150 | 150 | | | | | |
| CS 10800 | 8.000 | | | | | | CS 3155 | 155 | | | | | |
| | | | | | | | CS 3160 | 160 | | | | | |

HBT



Design

Claron style HBT is a single acting seal for gland applications. Designed as a high pressure, low friction seal for use in second generation tandem sealing arrangements where the lower friction seal is used on the pressure side, and a 'low leak' but higher friction seal on the non pressure side to collect the oil film during the positive stroke. This type of arrangement is used where both low friction and low leakage are required. The seals high pressure resistance makes it suitable for use in heavy duty applications where shock loads and pressure spikes occur, as found in mobile plant equipment.

Materials

Both the inner sealing element and the energiser are available in a wide range of materials to suit a variety of applications. The inner sealing element is manufactured from high performance Bronze filled PTFE, energised by an NBR O-Ring as standard.

Operating Range


Maximum Working Pressure Bar (For Standard Materials)

| | |
|-------------------------------------|-------------------------------------|
| Temp. Range -30°C to 80°C | Temp. Range 80°C to 120°C |
| 400 Bar | 350 Bar |

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

Pressure Bar

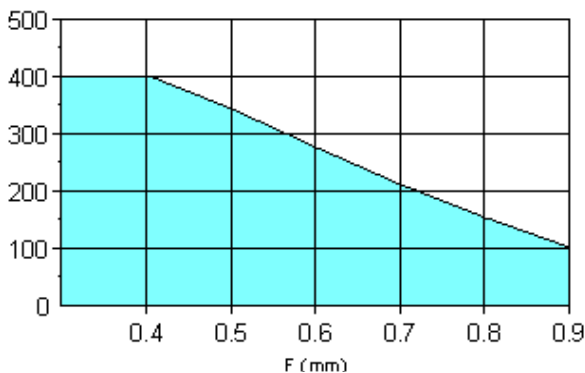

Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C


The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal. F/2 should be calculated allowing for all movements due to side-load and cylinder expansion.


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. For value of E/2, refer to the bearing ring requirements. Refer to Appendix 4 for value of tolerance symbols.


Fitting

Style HBT may be deformed and fitted into a closed groove. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

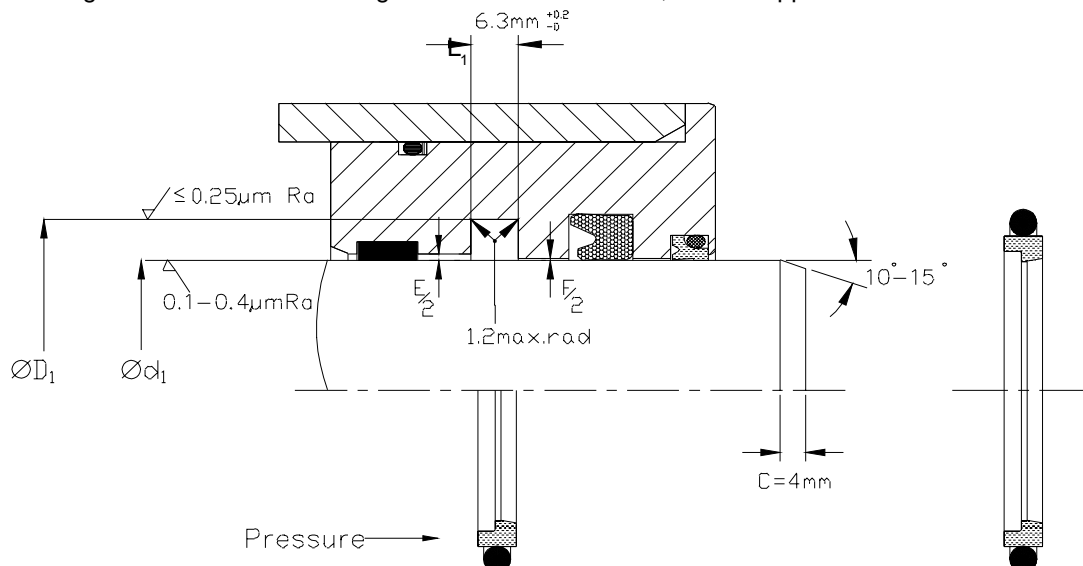



HBT



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 Ød ₁ | H9 ØD ₁ | +0.20 -0.00 L ₁ | Nominal C |
|-----------------------|-----------------------|-----------------------|----------------------------------|--------------|
| HBT 015 | 15 | 30.5 | 6.3 | 4 |
| HBT 020 | 20 | 35.5 | 6.3 | 4 |
| HBT 025 | 25 | 40.5 | 6.3 | 4 |
| HBT 030 | 30 | 45.5 | 6.3 | 4 |
| HBT 035 | 35 | 50.5 | 6.3 | 4 |
| HBT 040 | 40 | 55.5 | 6.3 | 4 |
| HBT 045 | 45 | 60.5 | 6.3 | 4 |
| HBT 050 | 50 | 65.5 | 6.3 | 4 |
| HBT 055 | 55 | 70.5 | 6.3 | 4 |
| HBT 060 | 60 | 75.5 | 6.3 | 4 |
| HBT 063 | 63 | 78.5 | 6.3 | 4 |
| HBT 065 | 65 | 80.5 | 6.3 | 4 |
| HBT 070 | 70 | 85.5 | 6.3 | 4 |
| HBT 075 | 75 | 90.5 | 6.3 | 4 |
| HBT 080 | 80 | 95.5 | 6.3 | 4 |
| HBT 085 | 85 | 100.5 | 6.3 | 4 |
| HBT 090 | 90 | 105.5 | 6.3 | 4 |
| HBT 095 | 95 | 110.5 | 6.3 | 4 |
| HBT 100 | 100 | 115.5 | 6.3 | 4 |
| HBT 105 | 105 | 120.5 | 6.3 | 4 |
| HBT 110 | 110 | 125.5 | 6.3 | 4 |
| HBT 115 | 115 | 130.5 | 6.3 | 4 |
| HBT 120 | 120 | 135.5 | 6.3 | 4 |
| HBT 125 | 125 | 140.5 | 6.3 | 4 |
| HBT 130 | 130 | 145.5 | 6.3 | 4 |
| HBT 135 | 135 | 150.5 | 6.3 | 4 |
| HBT 140 | 140 | 155.5 | 6.3 | 4 |
| HBT 145 | 145 | 160.5 | 6.3 | 4 |
| HBT 150 | 150 | 165.5 | 6.3 | 4 |
| HBT 155 | 155 | 170.5 | 6.3 | 4 |
| HBT 160 | 160 | 175.5 | 6.3 | 4 |
| HBT 165 | 165 | 180.5 | 6.3 | 4 |
| HBT 170 | 170 | 185.5 | 6.3 | 4 |
| HBT 175 | 175 | 190.5 | 6.3 | 4 |
| HBT 180 | 180 | 195.5 | 6.3 | 4 |
| HBT 185 | 185 | 200.5 | 6.3 | 4 |
| HBT 190 | 190 | 205.5 | 6.3 | 4 |
| HBT 195 | 195 | 210.5 | 6.3 | 4 |
| HBT 200 | 200 | 215.5 | 6.3 | 4 |
| HBT 205 | 205 | 220.5 | 6.3 | 4 |
| HBT 210 | 210 | 225.5 | 6.3 | 4 |
| HBT 215 | 215 | 230.5 | 6.3 | 4 |
| HBT 220 | 220 | 235.5 | 6.3 | 4 |
| HBT 225 | 225 | 240.5 | 6.3 | 4 |
| HBT 230 | 230 | 245.5 | 6.3 | 4 |

Items in **BOLD** are to suit ISO7425-2 housings.

HBTY



Design

Claron style HBTY is a single acting seal for gland applications using the same housing designs as Style HBI and Style HBT. Designed as a high pressure, low friction seal for use in second generation tandem sealing arrangements where the lower friction seal is used on the pressure side, and a 'low leak' but higher friction seal on the non pressure side to collect the oil film during the positive stroke. This type of arrangement is used where both low friction and low leakage are required. The seals high pressure resistance makes it suitable for use in heavy duty applications where shock loads and pressure spikes occur, as found in mobile plant equipment.

Materials

Both the inner sealing element and the energiser are available in a wide range of materials to suit a variety of applications. The inner sealing element is manufactured from high performance glass filled PTFE, energised by an NBR Sqaure section Ring as standard. Materials can be specified by a part number suffix E.g. HBTY065/B Bronze Filled PTFE.


Operating Range

Maximum Working Pressure Bar (For Standard Materials)

| | |
|-------------------------------------|-------------------------------------|
| Temp. Range -30°C to 80°C | Temp. Range 80°C to 120°C |
| 400 Bar | 350 Bar |

Optimum service conditions are affected by temperature, speed, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Maximum Diametral Clearance F

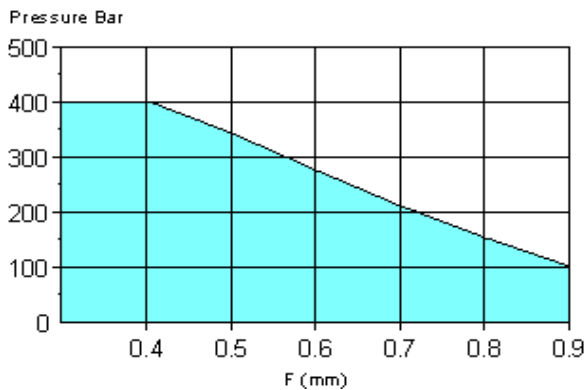


Note: Clearance gap F is the maximum permissible. i.e. gap completely on one side, in the temperature range of -30°C to 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the clearance gap F max. to a value closer to F/2 thus increasing the pressure capability of the seal. F/2 should be calculated allowing for all movements due to side-load and cylinder expansion.

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. For value of E/2, refer to the bearing ring requirements. Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style HBT may be deformed and fitted into a closed groove. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

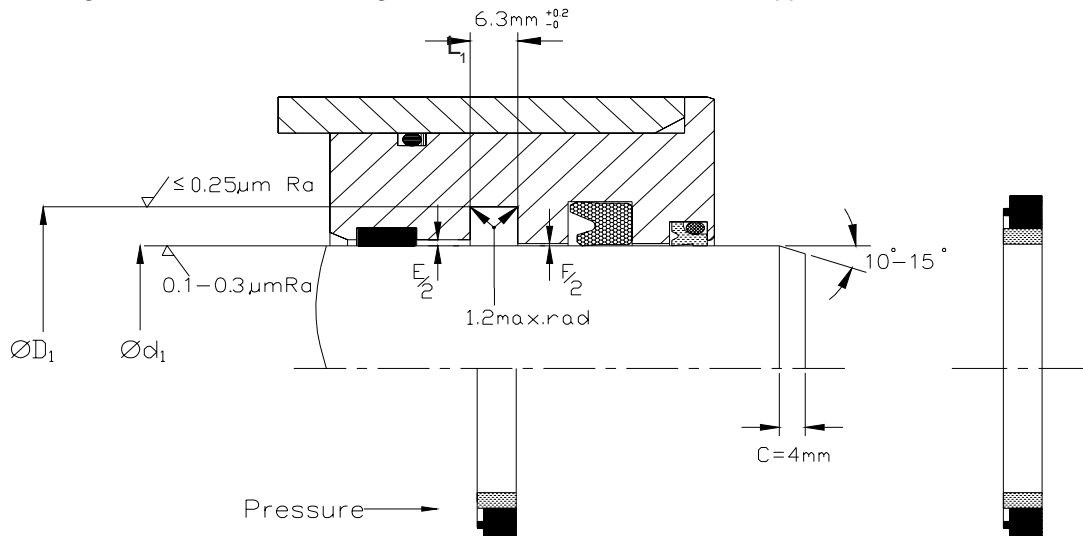


HBTY



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 Ød ₁ | H9 ØD ₁ | +0.20 -0.00 L ₁ | Nominal C |
|-----------------------|-----------------------|-----------------------|----------------------------------|--------------|
| HBTY 050 | 50 | 65.5 | 6.3 | 4 |
| HBTY 055 | 55 | 70.5 | 6.3 | 4 |
| HBTY 060 | 60 | 75.5 | 6.3 | 4 |
| HBTY 065 | 65 | 80.5 | 6.3 | 4 |
| HBTY 070 | 70 | 85.5 | 6.3 | 4 |
| HBTY 075 | 75 | 90.5 | 6.3 | 4 |
| HBTY 080 | 80 | 95.5 | 6.3 | 4 |
| HBTY 085 | 85 | 100.5 | 6.3 | 4 |
| HBTY 090 | 90 | 105.5 | 6.3 | 4 |
| HBTY 095 | 95 | 110.5 | 6.3 | 4 |
| HBTY 100 | 100 | 115.5 | 6.3 | 4 |
| HBTY 105 | 105 | 120.5 | 6.3 | 4 |
| HBTY 110 | 110 | 125.5 | 6.3 | 4 |
| HBTY 115 | 115 | 130.5 | 6.3 | 4 |
| HBTY 120 | 120 | 135.5 | 6.3 | 4 |
| HBTY 130 | 130 | 145.5 | 6.3 | 4 |


Items in **BOLD** are to suit ISO7425-2 housings.



Claron Polyseal

Double Acting Rotary Rod Seals

RRS Style



Design

Claron RRS Style Rod Seals are designed for slow rotating and spiralling movements in high pressure / heavy duty applications. Where space allows, the design incorporates grooves in the sealing face to reduce surface contact, increase radial load and retain lubrication.

Materials

Standard materials are CF(Carbon Fibre) and CD(Carbon Graphite) with a Nitrile O-Ring energiser but both the sealing element and the energiser are available in a wide range of high performance materials, including VM (modified Virgin P.T.F.E.) and B (Bronze filled P.T.F.E.) to suit a variety of applications. The application parameters should be carefully considered prior to selection of suitable materials from the tables in Appendix 2. Consult Claron for further advice.


Operating Range

Temperature -54°C to +180°C dependant upon media and O-Ring material.
 Pressure upto 300bar
 Velocity upto 2m/sec

These range parameters are maximum conditional values. Optimum services conditions are affected by sealing media, working surface and extrusion gaps. Refer to Appendix 1 for further information.

Diametrical Clearance F shown in the graph to the right is calculated as the maximum permissible extrusion gap allowing for movement due to side load, for various pressures and temperatures upto 80°C. The use of a suitably selected Claron bearing ring will effectively reduce the Radial clearance to a value nearer to F/2 thus increasing the pressure capability of the seal. The maximum seal extrusion gap should be calculated allowing for all tolerances, movement and cylinder expansion.

For pressures >300bar, the seal extrusion gap should be reduced by utilising smaller tolerances. e.g H8 for cylinder bore, f8 for piston diameter.

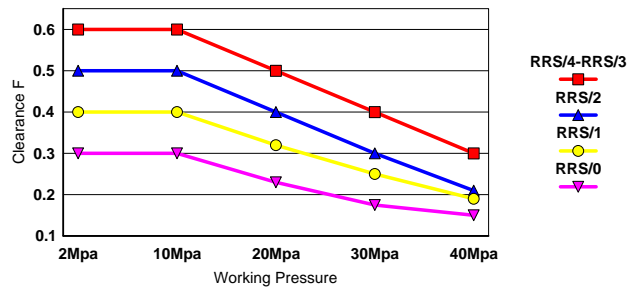

| Series Ref | Standard Range | Extended Range | D1 H9 Groove Dia | L1 +0.2 Groove Width | R1 Rad Max | C' Chfr Min | No Grooves In Sleeve | Min Rod Dia for Closed Grooves |
|------------|----------------|----------------|------------------|----------------------|------------|-------------|----------------------|--------------------------------|
| RRS/0 | 6 - 18.9 | 6 - 130 | d1 + 4.9 | 2.20 | 0.3 | 2.0 | 0 | 20 |
| RRS/1 | 19 - 37.9 | 10 - 245 | d1 + 7.5 | 3.20 | 0.5 | 2.5 | 1 | 30 |
| RRS/2 | 38 - 199.9 | 19 - 455 | d1 + 11.0 | 4.20 | 0.8 | 3.5 | 1 | 40 |
| RRS/3 | 200 - 255.9 | 38 - 500 | d1 + 15.5 | 6.30 | 1.2 | 5.0 | 2 | 60 |
| RRS/4 | 256 - 500 | 120 - 500 | d1 + 21.0 | 8.10 | 1.5 | 6.5 | 3 | |


How To Order


95mm Rod Material Carbon Fibre P.T.F.E./ Nitrile O-Ring RRS/2/0950/CF
 Light Duty 95mm Rod RRS/1/0950/CF (3.2 Width Groove)
 Heavy Duty 95mm Rod RRS/3/0950/CF (6.3 width Groove)
 eg. For sizes in the extended range use the series number applicable
 For O-Ring Energiser materials other than Nitrile, use suffix shown in Material Table, Appendix 2
 eg. Fluorocarbon Material (FKM) RRS/3/0950/CF/FKM

| Style | Series | 4Digit Size Code | PTFE Material Code |
|-------|--------|------------------|--------------------|
| RRS/ | 2/ | 0950/ | CF |
| RRS/ | 1/ | 0950/ | CF |
| RRS/ | 3/ | 0950/ | CF |


Housing

For housing dimensions, leading chamfers and tolerances refer to the table above and Appendix 4 for the value of tolerance symbols.

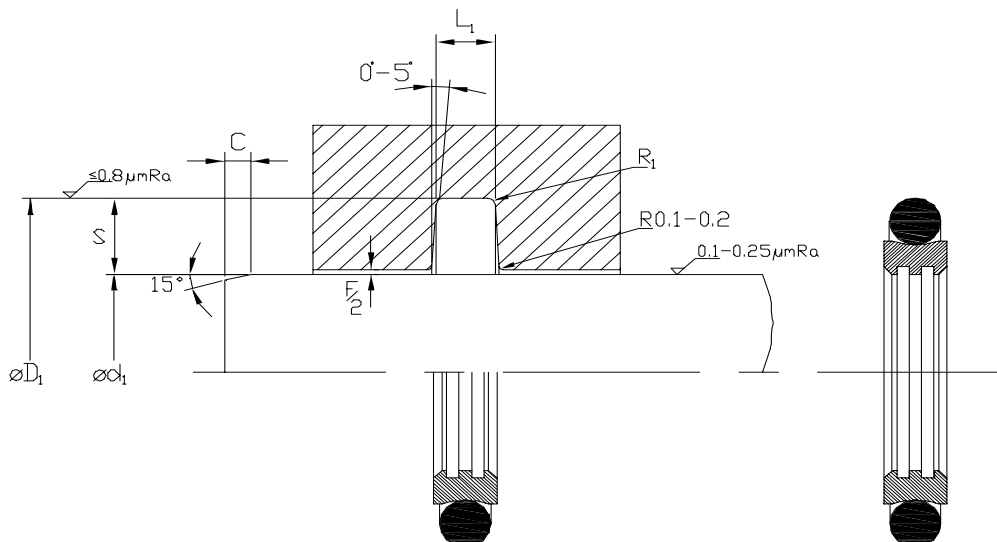



Claron Polyseal
Double Acting Rotary Rod Seals
RRS Style



Nominal Dimensions & Machining Tolerances


| Series Ref | Size Ref | Ød1 h9 | ØD1 H9 | L1 +0.2 / -0.0 | Series Ref | Size Ref | Ød1 h9 | ØD1 H9 | L1 +0.2 / -0.0 |
|-------------|--------------|--------------|-------------|--|--------------|--------------|--------------|--------------|-------------------|
| RRS/0/ | 0060 | 6.0 | 10.9 | 2.2 | RRS/2/ | 1270 | 127.0 | 138.0 | 4.2 |
| | 0080 | 8.0 | 12.9 | 2.2 | | 1300 | 130.0 | 141.0 | 4.2 |
| | 0100 | 10.0 | 14.9 | 2.2 | | 1350 | 135.0 | 146.0 | 4.2 |
| | 0120 | 12.0 | 16.9 | 2.2 | | 1400 | 140.0 | 151.0 | 4.2 |
| | 0140 | 14.0 | 18.9 | 2.2 | | 1450 | 145.0 | 156.0 | 4.2 |
| | 0150 | 15.0 | 19.9 | 2.2 | | 1500 | 150.0 | 161.0 | 4.2 |
| RRS/1/ | 0160 | 16.0 | 20.9 | 2.2 | 1524 | 152.4 | 163.4 | 4.2 | |
| | 0180 | 18.0 | 22.9 | 2.2 | 1600 | 160.0 | 171.0 | 4.2 | |
| | 0200 | 20.0 | 27.5 | 3.2 | 1700 | 170.0 | 181.0 | 4.2 | |
| | 0220 | 22.0 | 29.5 | 3.2 | 1778 | 177.8 | 188.8 | 4.2 | |
| | 0250 | 25.0 | 32.5 | 3.2 | 1800 | 180.0 | 191.0 | 4.2 | |
| | 0254 | 25.4 | 32.9 | 3.2 | | | | | 1900 |
| RRS/2/ | 0280 | 28.0 | 35.5 | 3.2 | RRS/3/ | 2000 | 200.0 | 215.5 | 6.3 |
| | 0300 | 30.0 | 37.5 | 3.2 | | 2032 | 203.2 | 218.7 | 6.3 |
| | 0320 | 32.0 | 39.5 | 3.2 | | 2100 | 210.0 | 225.5 | 6.3 |
| | 0350 | 35.0 | 42.5 | 3.2 | | 2200 | 220.0 | 235.5 | 6.3 |
| | 0360 | 36.0 | 43.5 | 3.2 | | 2300 | 230.0 | 245.5 | 6.3 |
| | RRS/2/ | 0380 | 38.0 | 49.0 | | 4.2 | 2400 | 240.0 | 255.5 |
| 0400 | | 40.0 | 51.0 | 4.2 | 2500 | 250.0 | 265.5 | 6.3 | |
| 0450 | | 45.0 | 56.0 | 4.2 | 2540 | 254.0 | 269.5 | 6.3 | |
| 0500 | | 50.0 | 61.0 | 4.2 | RRS/4/ | 2600 | 260.0 | 281.0 | 8.1 |
| 0508 | | 50.8 | 61.8 | 4.2 | | 2800 | 280.0 | 301.0 | 8.1 |
| 0550 | | 55.0 | 66.0 | 4.2 | | 3000 | 300.0 | 321.0 | 8.1 |
| 0560 | | 56.0 | 67.0 | 4.2 | | 3048 | 304.8 | 325.8 | 8.1 |
| 0600 | | 60.0 | 71.0 | 4.2 | | 3200 | 320.0 | 341.0 | 8.1 |
| 0630 | | 63.0 | 74.0 | 4.2 | | 3300 | 330.0 | 351.0 | 8.1 |
| 0650 | | 65.0 | 76.0 | 4.2 | 3500 | 350.0 | 371.0 | 8.1 | |
| 0700 | | 70.0 | 81.0 | 4.2 | 3600 | 360.0 | 381.0 | 8.1 | |
| 0750 | | 75.0 | 86.0 | 4.2 | 3800 | 380.0 | 401.0 | 8.1 | |
| 0762 | 76.2 | 87.2 | 4.2 | 4000 | 400.0 | 421.0 | 8.1 | | |
| 0800 | 80.0 | 91.0 | 4.2 | 4200 | 420.0 | 441.0 | 8.1 | | |
| 0850 | 85.0 | 96.0 | 4.2 | 4500 | 450.0 | 471.0 | 8.1 | | |
| 0900 | 90.0 | 101.0 | 4.2 | 4800 | 480.0 | 501.0 | 8.1 | | |
| 0950 | 95.0 | 106.0 | 4.2 | 5000 | 500.0 | 521.0 | 8.1 | | |
| 1000 | 100.0 | 111.0 | 4.2 | All intermediate sizes, including imperial can be supplied within the extended range of sizes listed, see 'How To Order' | | | | | |
| 1016 | 101.6 | 112.6 | 4.2 | | | | | | |
| 1050 | 105.0 | 116.0 | 4.2 | | | | | | |
| 1100 | 110.0 | 121.0 | 4.2 | | | | | | |
| 1143 | 114.3 | 125.3 | 4.2 | | | | | | |
| 1150 | 115.0 | 126.0 | 4.2 | | | | | | |
| 1200 | 120.0 | 131.0 | 4.2 | | | | | | |
| 1250 | 125.0 | 136.0 | 4.2 | | | | | | |

The Rod diameters in BOLD conform to the requirements of ISO3320
Housing sizes in BOLD conform to the requirements of ISO7425-2

Fitting

For the seal to function correctly, it is important that care is taken during fitment, For a detailed checklist, refer to Appendix 3.

SECTION D WIPER SEALS

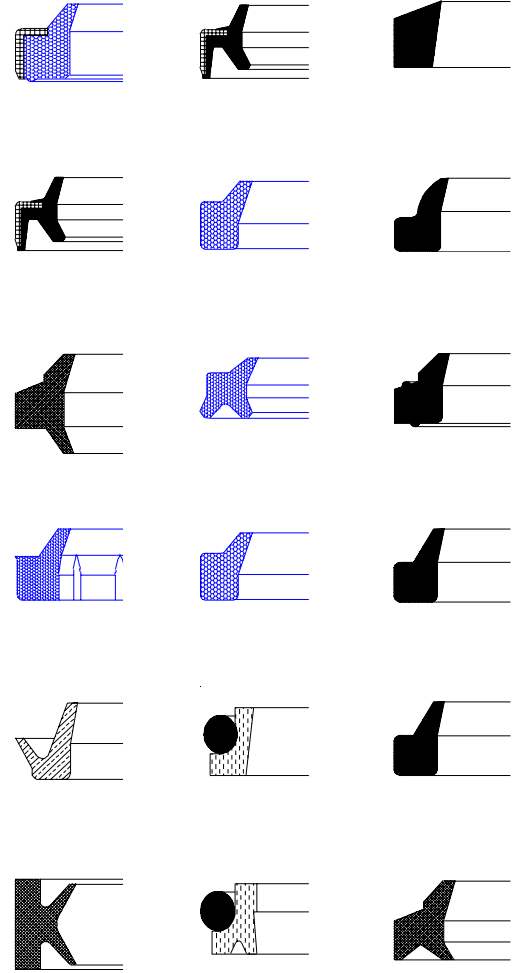

Design

Claron Style PWB rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a light duty wiper and is precision moulded in Nitrile 90° rubber. The wiper is machine trimmed to provide a precise wiping lip.

The wiper is compact in design making it ideal for use where space is an important factor.

Operating Conditions

| | |
|------------------------|----------------|
| Temp. Range | -30°C to 100°C |
| Max.Linear Speed m/sec | 3.0 |

Optimum service conditions are affected by temperature, speed, and surface finish.

Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.


Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style PWB may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.



For a detailed checklist, refer to Appendix 3.

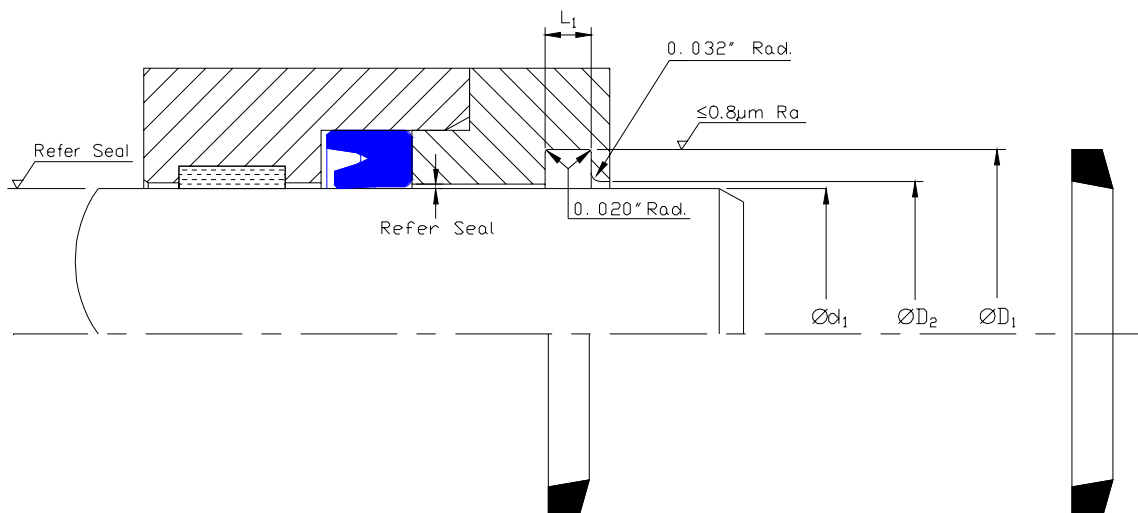



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød ₁ | Machining Tolerances | | Nominal ±0.010 L ₁ |
|-----------------------|--|-------------------------------------|-------------------------------------|-------------------------------------|
| | | +0.000 -0.005 ØD ₁ | +0.005 -0.000 ØD ₂ | |
| PWB 0 | 0.375 | 0.540 | 0.430 | 0.120 |
| PWB 01 | 0.437 | 0.610 | 0.495 | 0.120 |
| PWB 1 | 0.500 | 0.680 | 0.560 | 0.130 |
| PWB 2 | 0.562 | 0.740 | 0.630 | 0.130 |
| PWB 3 | 0.625 | 0.820 | 0.700 | 0.140 |
| PWB 4 | 0.687 | 0.880 | 0.760 | 0.140 |
| PWB 5 | 0.750 | 0.950 | 0.820 | 0.140 |
| PWB 6 | 0.812 | 1.020 | 0.880 | 0.140 |
| PWB 7 | 0.937 | 1.080 | 0.950 | 0.150 |
| PWB 8 | 0.937 | 1.150 | 1.010 | 0.150 |
| PWB 9 | 1.000 | 1.240 | 1.080 | 0.160 |
| PWB 11 | 1.125 | 1.375 | 1.210 | 0.160 |
| PWB 12 | 1.187 | 1.420 | 1.270 | 0.160 |
| PWB 13 | 1.250 | 1.490 | 1.330 | 0.170 |
| PWB 15 | 1.375 | 1.625 | 1.460 | 0.170 |
| PWB 17 | 1.500 | 1.770 | 1.590 | 0.180 |
| PWB 19 | 1.625 | 1.880 | 1.720 | 0.180 |
| PWB 20 | 1.687 | 1.960 | 1.780 | 0.190 |
| PWB 21 | 1.750 | 2.030 | 1.850 | 0.190 |
| PWB 23 | 1.875 | 2.160 | 1.970 | 0.190 |
| PWB 25 | 2.000 | 2.300 | 2.100 | 0.200 |
| PWB 26 | 2.125 | 2.430 | 2.230 | 0.210 |
| PWB 27 | 2.250 | 2.570 | 2.360 | 0.210 |
| PWB 28 | 2.375 | 2.700 | 2.490 | 0.220 |
| PWB 29 | 2.500 | 2.840 | 2.610 | 0.220 |
| PWB 30 | 2.625 | 2.970 | 2.740 | 0.230 |
| PWB 31 | 2.750 | 3.110 | 2.870 | 0.230 |
| PWB 32 | 2.875 | 3.240 | 3.000 | 0.240 |
| PWB 33 | 3.000 | 3.380 | 3.130 | 0.240 |
| PWB 34 | 3.125 | 3.500 | 3.260 | 0.250 |
| PWB 35 | 3.250 | 3.650 | 3.390 | 0.250 |
| PWB 36 | 3.375 | 3.780 | 3.510 | 0.260 |
| PWB 37 | 3.500 | 3.920 | 3.640 | 0.270 |
| PWB 38 | 3.625 | 4.050 | 3.770 | 0.270 |
| PWB 39 | 3.750 | 4.190 | 3.900 | 0.280 |
| PWB 40 | 3.875 | 4.320 | 4.030 | 0.280 |
| PWB 41 | 4.000 | 4.460 | 4.160 | 0.290 |
| PWB 44 | 4.250 | 4.730 | 4.410 | 0.300 |
| PWB 45 | 4.375 | 4.860 | 4.540 | 0.300 |
| PWB 46 | 4.500 | 5.000 | 4.670 | 0.310 |
| PWB 48 | 5.000 | 5.540 | 5.180 | 0.330 |
| PWB 50 | 5.250 | 5.810 | 5.440 | 0.340 |
| PWB 51 | 5.375 | 5.945 | 5.570 | 0.345 |
| PWB 52 | 5.500 | 6.080 | 5.700 | 0.350 |
| PWB 53 | 5.625 | 6.126 | 5.185 | 0.355 |
| PWB 56 | 6.000 | 6.620 | 6.210 | 0.380 |
| PWB 60 | 6.500 | 7.160 | 6.720 | 0.400 |
| PWB 61 | 6.625 | 7.295 | 6.850 | 0.405 |



Design

Claron Style PWO Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a light to medium duty wiper and is precision moulded in Nitrile 90° rubber. The wiper is machine trimmed to provide a precise wiping lip.

Operating Conditions

Temp. Range -30°C to 100°

Max.Linear Speed m/sec 3.0

Optimum service conditions are affected by temperature, speed, and surface finish.

Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.


Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style PWO may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.


For a detailed checklist, refer to Appendix 3.

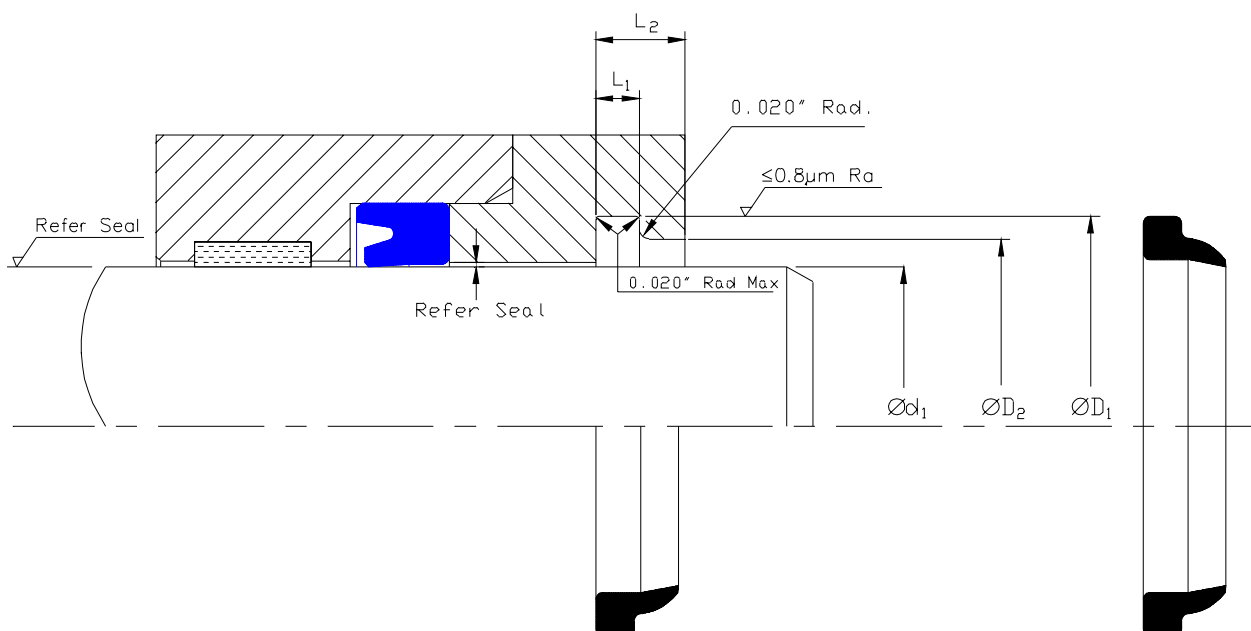



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød ₁ | +0.020 +0.010 ØD ₁ | ±0.005 ØD ₂ | +0.020 +0.010 L ₁ | Nominal L ₂ |
|--------------------|---|-------------------------------------|---------------------------|------------------------------------|---------------------------|
| PWO 050090 | 0.500 | 0.900 | 0.700 | 0.125 | 0.250 |
| PWO 062102 | 0.625 | 1.025 | 0.825 | 0.125 | 0.250 |
| PWO 075115 | 0.750 | 1.150 | 0.950 | 0.125 | 0.250 |
| PWO 081121 | 0.812 | 1.213 | 1.013 | 0.125 | 0.250 |
| PWO 087127 | 0.875 | 1.275 | 1.075 | 0.125 | 0.250 |
| PWO 100140 | 1.000 | 1.400 | 1.200 | 0.125 | 0.250 |
| PWO 112162 | 1.125 | 1.625 | 1.425 | 0.125 | 0.375 |
| PWO 125175 | 1.250 | 1.750 | 1.550 | 0.125 | 0.375 |
| PWO 131187 | 1.312 | 1.875 | 1.675 | 0.125 | 0.250 |
| PWO 137187 | 1.375 | 1.875 | 1.675 | 0.125 | 0.375 |
| PWO 150200 | 1.500 | 2.000 | 1.800 | 0.125 | 0.375 |
| PWO 162212 | 1.625 | 2.125 | 1.925 | 0.125 | 0.375 |
| PWO 175225 | 1.750 | 2.250 | 2.050 | 0.125 | 0.375 |
| PWO 187237 | 1.875 | 2.375 | 2.175 | 0.125 | 0.375 |
| PWO 200250 | 2.000 | 2.500 | 2.300 | 0.125 | 0.375 |
| PWO 212262 | 2.125 | 2.625 | 2.425 | 0.125 | 0.375 |
| PWO 225275 | 2.250 | 2.750 | 2.550 | 0.125 | 0.375 |
| PWO 237287 | 2.375 | 2.875 | 2.675 | 0.125 | 0.375 |
| PWO 250300 | 2.500 | 3.000 | 2.800 | 0.125 | 0.375 |
| PWO 275325 | 2.750 | 3.250 | 3.050 | 0.125 | 0.375 |
| PWO 300350 | 3.000 | 3.500 | 3.300 | 0.125 | 0.375 |
| PWO 325400 | 3.250 | 4.000 | 3.650 | 0.187 | 0.500 |
| PWO 350425 | 3.500 | 4.250 | 3.900 | 0.187 | 0.500 |
| PWO 375450 | 3.750 | 4.500 | 4.150 | 0.187 | 0.500 |
| PWO 400475 | 4.000 | 4.750 | 4.400 | 0.187 | 0.500 |
| PWO 425500 | 4.250 | 5.000 | 4.650 | 0.187 | 0.500 |
| PWO 450525 | 4.500 | 5.250 | 4.900 | 0.187 | 0.500 |
| PWO 500575 | 5.000 | 5.750 | 5.400 | 0.187 | 0.500 |
| PWO 600675 | 6.000 | 6.750 | 6.400 | 0.187 | 0.500 |



Design

Claron Style PWS Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a medium to heavy duty wiper and is precision moulded in Nitrile 90° rubber. The wiper is machine trimmed to provide a precise wiping lip.

The addition of sealing beads on this wiper provide positive sealing in the housing preventing moisture/contaminants from passing the outside of the wiper.

Operating Conditions

Temp. Range -30°C to 100°C

Max.Linear Speed m/sec 3.0

Optimum service conditions are affected by temperature, speed and surface finish.

Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.

Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style PWS may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

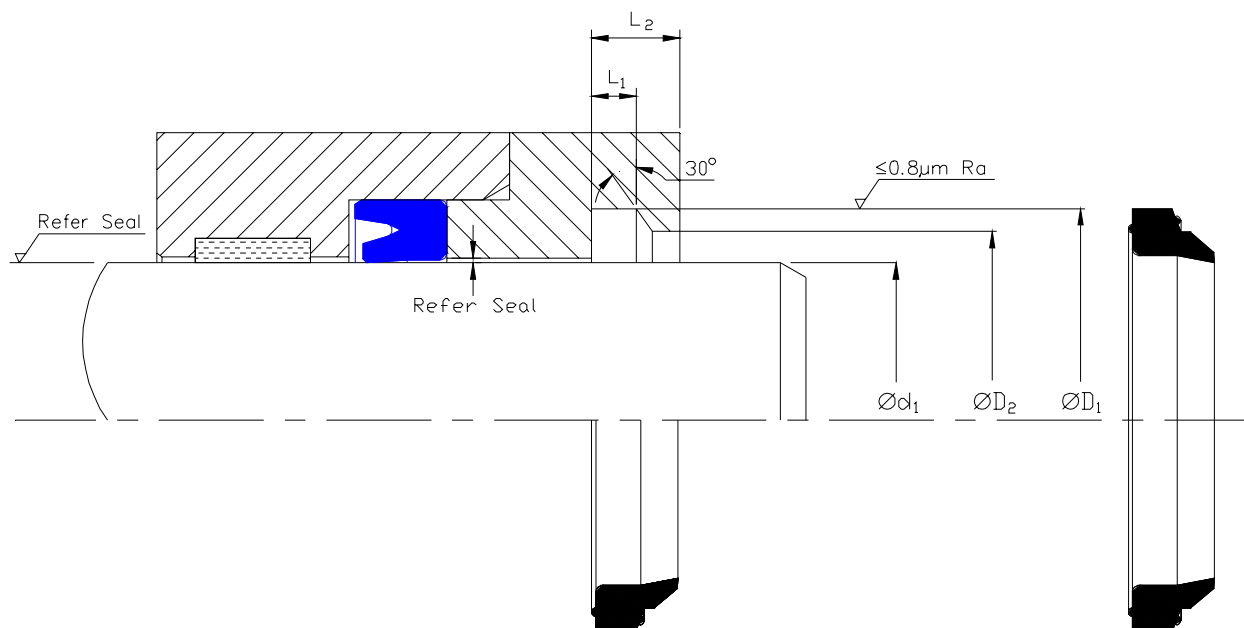



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød ₁ | +0.20 -0.00 ØD ₁ | +0.20 -0.00 ØD ₂ | +0.20 -0.00 L ₁ | Nominal L ₂ |
|--------------------|---|-----------------------------------|-----------------------------------|----------------------------------|---------------------------|
| PWS 074106 | 19.00 | 27.00 | 23.00 | 3.40 | 7.00 |
| PWS 098148 | 25.00 | 37.70 | 31.40 | 5.30 | 8.90 |
| PWS 118168 | 30.00 | 42.70 | 36.40 | 5.30 | 8.90 |
| PWS 125157 | 32.00 | 40.00 | 36.00 | 3.40 | 7.00 |
| PWS 137187 | 35.00 | 47.70 | 41.40 | 5.30 | 8.90 |
| PWS 157207 | 40.00 | 52.70 | 46.40 | 5.30 | 8.90 |
| PWS 196228 | 50.00 | 58.00 | 54.00 | 3.40 | 7.00 |
| PWS 220270 | 56.00 | 68.70 | 62.40 | 5.30 | 8.90 |
| PWS 236286 | 60.00 | 72.70 | 66.40 | 5.30 | 8.90 |
| PWS 248298 | 63.00 | 75.70 | 69.40 | 5.30 | 8.90 |
| PWS 255305 | 65.00 | 77.70 | 71.40 | 5.30 | 8.90 |
| PWS 295345 | 75.00 | 87.70 | 81.40 | 5.30 | 8.90 |
| PWS 315365 | 80.00 | 92.70 | 86.40 | 5.30 | 8.90 |
| PWS 334384 | 85.00 | 97.70 | 91.40 | 5.30 | 8.90 |
| PWS 393443 | 100.00 | 112.70 | 106.40 | 5.30 | 8.90 |

PWS

Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød_1 | +0.008 -0.000 ØD_1 | +0.008 -0.000 ØD_2 | +0.008 -0.000 L_1 | Nominal L_2 |
|-----------------------|--|-----------------------------------|-----------------------------------|---------------------------|------------------|
| PWS 100150 | 1.000 | 1.500 | 1.250 | 0.208 | 0.350 |
| PWS 112162 | 1.125 | 1.625 | 1.375 | 0.208 | 0.350 |
| PWS 125175 | 1.250 | 1.750 | 1.500 | 0.208 | 0.350 |
| PWS 137187 | 1.375 | 1.875 | 1.625 | 0.280 | 0.350 |
| PWS 150200 | 1.500 | 2.000 | 1.750 | 0.208 | 0.350 |
| PWS 162212 | 1.625 | 2.125 | 1.875 | 0.208 | 0.350 |
| PWS 175225 | 1.750 | 2.250 | 2.000 | 0.208 | 0.350 |
| PWS 187237 | 1.875 | 2.375 | 2.125 | 0.208 | 0.350 |
| PWS 200250 | 2.000 | 2.500 | 2.250 | 0.208 | 0.350 |
| PWS 212262 | 2.125 | 2.625 | 2.375 | 0.208 | 0.350 |
| PWS 225275 | 2.250 | 2.750 | 2.500 | 0.208 | 0.350 |
| PWS 250300 | 2.500 | 3.000 | 2.750 | 0.208 | 0.350 |
| PWS 275325 | 2.750 | 3.250 | 3.000 | 0.208 | 0.350 |
| PWS 300350 | 3.000 | 3.500 | 3.250 | 0.208 | 0.350 |
| PWS 325375 | 3.250 | 3.750 | 3.500 | 0.208 | 0.350 |
| PWS 337387 | 3.375 | 3.875 | 3.625 | 0.208 | 0.350 |
| PWS 350400 | 3.500 | 4.000 | 3.750 | 0.208 | 0.350 |
| PWS 362412 | 3.625 | 4.125 | 3.875 | 0.208 | 0.350 |
| PWS 400450 | 4.000 | 4.500 | 4.250 | 0.208 | 0.350 |
| PWS 437487 | 4.375 | 4.875 | 4.625 | 0.208 | 0.350 |
| PWS 450500 | 4.500 | 5.000 | 4.750 | 0.208 | 0.350 |
| PWS 462512 | 4.625 | 5.125 | 4.875 | 0.208 | 0.350 |
| PWS 475525 | 4.750 | 5.250 | 5.000 | 0.208 | 0.350 |
| PWS 512562 | 5.125 | 5.625 | 5.375 | 0.208 | 0.350 |
| PWS 537587 | 5.375 | 5.875 | 5.625 | 0.208 | 0.350 |
| PWS 562612 | 5.625 | 6.125 | 5.875 | 0.208 | 0.350 |

Design

Claron Style PWM Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a medium duty wiper and is precision moulded in Nitrile 90° rubber. The wiper is machine trimmed to provide a precise wiping lip.

Operating Conditions

Temp. Range -30°C to 100°C

Max.Linear Speed m/sec 3.0

Optimum service conditions are affected by temperature, speed and surface finish.

Refer to Appendix 1 section for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.

Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style PWM may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

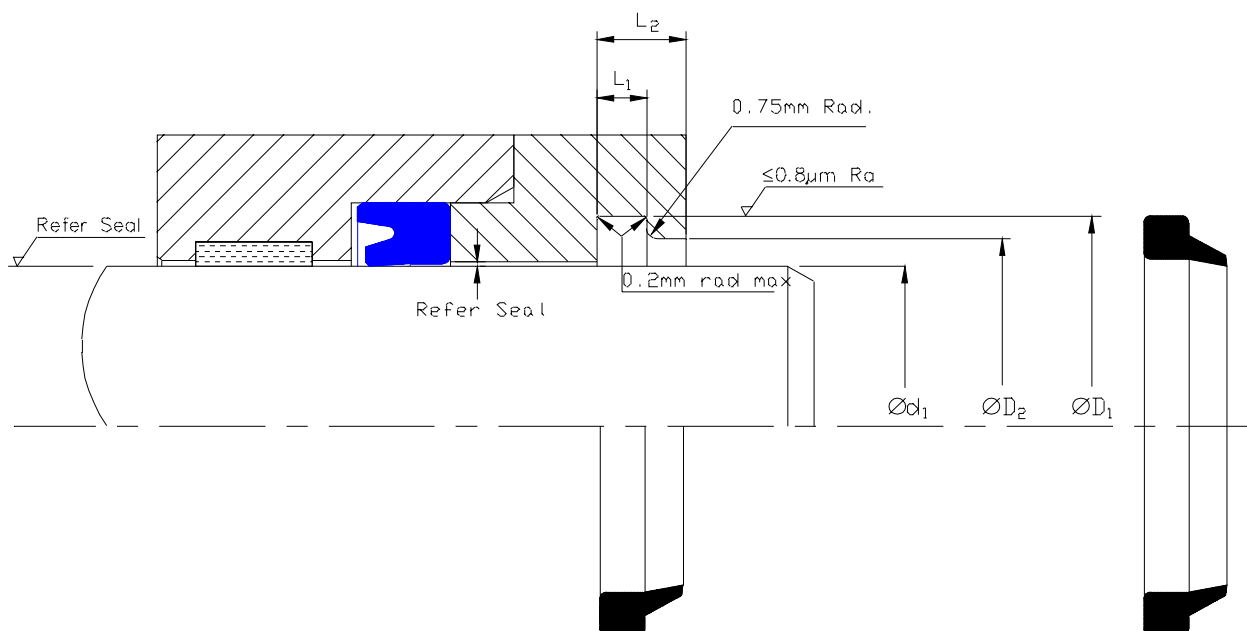


Single Acting Rod Wiper Seal

Metric

PWM

Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød_1 | +0.20 -0.00 ØD_1 | +0.20 -0.00 ØD_2 | +0.20 -0.00 L_1 | Nominal L_2 |
|-----------------------|--|---------------------------------|---------------------------------|-------------------------|------------------|
| PWM 070094 | 18 | 24.6 | 21 | 3.8 | 5.3 |
| PWM 070102 | 18 | 26.6 | 21 | 5.3 | 7.0 |
| PWM 078110 | 20 | 28.6 | 23 | 5.3 | 7.0 |
| PWM 086118 | 22 | 30.6 | 25 | 5.3 | 7.0 |
| PWM 098129 | 25 | 33.6 | 28 | 5.3 | 7.0 |
| PWM 110141 | 28 | 36.6 | 31 | 5.3 | 7.0 |
| PWM 118149 | 30 | 38.6 | 33 | 5.3 | 7.0 |
| PWM 125157 | 32 | 40.6 | 35 | 5.3 | 7.0 |
| PWM 137169 | 35 | 43.6 | 38 | 5.3 | 7.0 |
| PWM 141173 | 36 | 44.6 | 39 | 5.3 | 7.0 |
| PWM 157188 | 40 | 48.6 | 43 | 5.3 | 7.0 |
| PWM 177208 | 45 | 53.6 | 48 | 5.3 | 7.0 |
| PWM 196228 | 50 | 58.6 | 53 | 5.3 | 7.0 |
| PWM 216248 | 55 | 63.6 | 58 | 5.3 | 7.0 |
| PWM 220251 | 56 | 64.6 | 59 | 5.3 | 7.0 |
| PWM 236267 | 60 | 68.6 | 63 | 5.3 | 7.0 |
| PWM 248279 | 63 | 71.6 | 66 | 5.3 | 7.0 |
| PWM 275307 | 70 | 78.6 | 73 | 5.3 | 7.0 |
| PWM 295326 | 75 | 83.6 | 78 | 5.3 | 7.0 |
| PWM 314346 | 80 | 88.6 | 83 | 5.3 | 7.0 |
| PWM 354401 | 90 | 102.6 | 96 | 7.1 | 10.5 |
| PWM 362409 | 92 | 104.6 | 98 | 7.1 | 10.5 |
| PWM 393440 | 100 | 112.2 | 106 | 7.1 | 10.5 |
| PWM 464511 | 118 | 130.2 | 124 | 7.1 | 10.5 |
| PWM 9631043 | 245 | 266.0 | 259 | 11.0 | 14.5 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection $\text{Ø}d_1$ | +0.008 -0.000 $\text{Ø}D_1$ | +0.008 -0.000 $\text{Ø}D_2$ | +0.008 -0.000 L_1 | Nominal L_2 |
|--------------------|---------------------------------------|-----------------------------------|-----------------------------------|---------------------------|------------------|
| PWM 075100 | 0.750 | 1.026 | 0.875 | 0.156 | 0.210 |
| PWM 100137 | 1.000 | 1.398 | 1.187 | 0.230 | 0.300 |
| PWM 137175 | 1.375 | 1.773 | 1.562 | 0.230 | 0.300 |
| PWM 150187 | 1.500 | 1.898 | 1.678 | 0.230 | 0.300 |
| PWM 175206 | 1.750 | 2.085 | 1.875 | 0.218 | 0.280 |
| PWM 200237 | 2.000 | 2.398 | 2.187 | 0.230 | 0.300 |
| PWM 225262 | 2.250 | 2.648 | 2.437 | 0.230 | 0.300 |
| PWM 250287 | 2.500 | 2.898 | 2.687 | 0.230 | 0.300 |
| PWM 300337 | 3.000 | 3.398 | 3.187 | 0.230 | 0.300 |
| PWM 350400 | 3.500 | 4.008 | 3.750 | 0.295 | 0.450 |
| PWM 400450 | 4.000 | 4.508 | 4.250 | 0.295 | 0.450 |
| PWM 437487 | 4.375 | 4.883 | 4.625 | 0.295 | 0.450 |
| PWM 500550 | 5.000 | 5.508 | 5.250 | 0.295 | 0.450 |

Design

Claron Style WM Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a medium duty wiper and is precision moulded in Nitrile 90° rubber. The wiper is machine trimmed to provide a precise wiping lip.

Operating Conditions

Temp.Range -30°C to 100°C

Max Linear Speed m/sec 3.0

Optimum service conditions are affected by temperature, speed and surface finish.

Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.

Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style WM may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

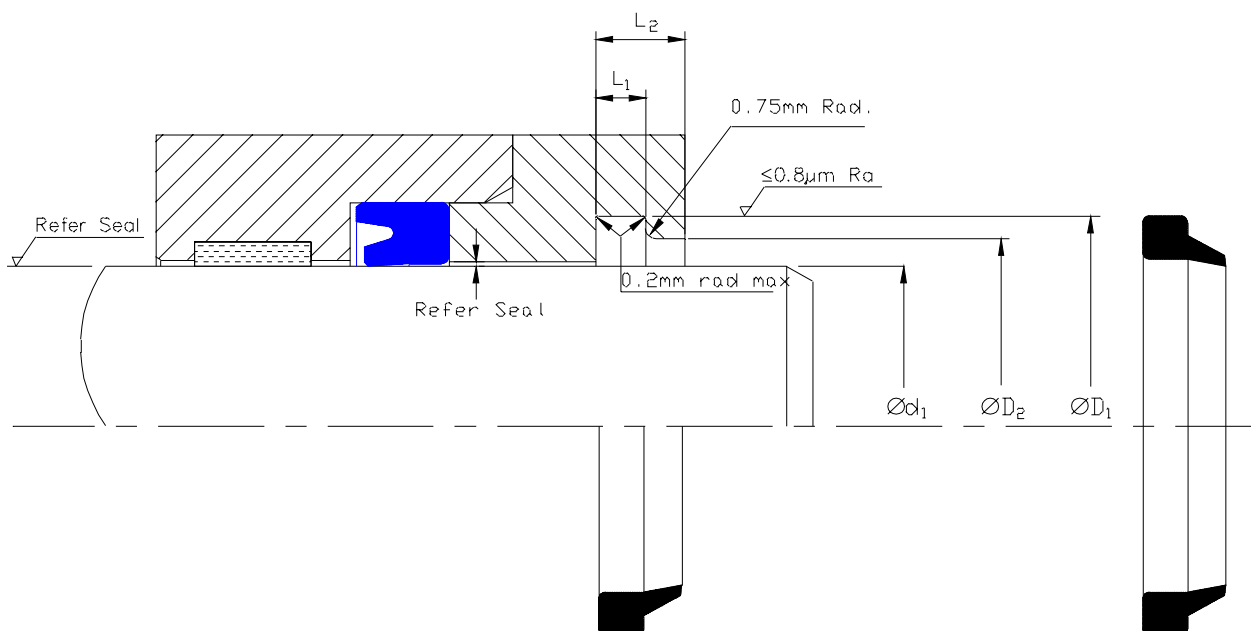

WM

Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød ₁ | +0.20 | +0.20 | +0.20 | Nominal L ₂ |
|-----------------------|--|--------------------------|--------------------------|-------------------------|---------------------------|
| | | -0.00 ØD ₁ | -0.00 ØD ₂ | -0.00 L ₁ | |
| WM 078110 | 20 | 28.0 | 24 | 4.0 | 6 |
| WM 098129 | 25 | 33.0 | 29 | 4.0 | 6 |
| WM 110141 | 28 | 36.0 | 32 | 4.0 | 6 |
| WM 118165 | 30 | 42.0 | 36 | 6.0 | 9 |
| WM 125173 | 32 | 44.0 | 38 | 6.0 | 9 |
| WM 141188 | 36 | 48.0 | 42 | 6.0 | 9 |
| WM 157204 | 40 | 52.0 | 46 | 6.0 | 9 |
| WM 177224 | 45 | 57.0 | 51 | 6.0 | 9 |
| WM 196244 | 50 | 62.0 | 55 | 6.0 | 9 |
| WM 216255 | 55 | 65.6 | 58 | 5.3 | 7 |
| WM 248295 | 63 | 75.0 | 69 | 6.0 | 9 |
| WM 314362 | 80 | 92.2 | 86 | 7.1 | 12 |

Double Acting Rod Wiper Seal Imperial

PWE

Design

Claron **Style PWE** double acting Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke and to assist sealing by collecting the fluid film on the positive stroke. It is classified as a medium to heavy duty wiper and is precision moulded in Nitrile 90° rubber. The wiper is machine trimmed to provide a precise wiping lip. The wipers ability to assist sealing make it ideal for use where zero leakage is required. Claron Wiper Seals Style PWE should not be utilised in combination with double-acting Rod seals unless the housing design allows for pressure relief between the wiper and the seal.

Operating Conditions

| | |
|------------------------|----------------|
| Temp. range | -30°C to 100°C |
| Max Linear Speed m/sec | 3.0 |

Optimum service conditions are affected by temperature, speed and surface finish.
Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids


| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.
Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style PWE may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.
For a detailed checklist, refer to Appendix 3.


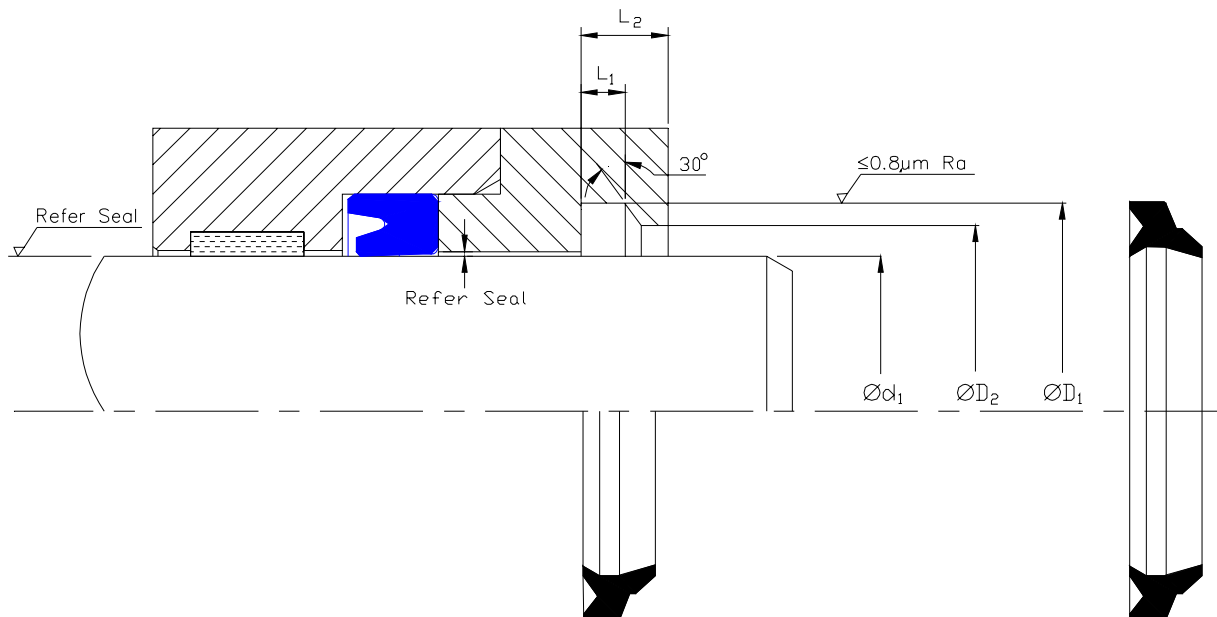


PWE



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød ₁ | +0.005 -0.000 ØD ₁ | +0.005 -0.000 ØD ₂ | +0.005 - 0.000 L ₁ | Nominal L ₂ |
|--------------------|---|-------------------------------------|-------------------------------------|-------------------------------------|---------------------------|
| PWE 100137 | 1.000 | 1.385 | 1.082 | 0.195 | 0.343 |
| PWE 125162 | 1.250 | 1.635 | 1.332 | 0.195 | 0.343 |
| PWE 137175 | 1.375 | 1.760 | 1.457 | 0.195 | 0.343 |
| PWE 150187 | 1.500 | 1.885 | 1.582 | 0.195 | 0.343 |
| PWE 162200 | 1.625 | 2.010 | 1.707 | 0.195 | 0.343 |
| PWE 175212 | 1.750 | 2.135 | 1.832 | 0.195 | 0.343 |
| PWE 200237 | 2.000 | 2.385 | 2.082 | 0.195 | 0.343 |
| PWE 250287 | 2.500 | 2.885 | 2.582 | 0.195 | 0.343 |
| PWE 300350 | 3.000 | 3.510 | 3.157 | 0.255 | 0.468 |
| PWE 362412 | 3.625 | 4.135 | 3.782 | 0.255 | 0.468 |
| PWE 400450 | 4.000 | 4.510 | 4.157 | 0.255 | 0.468 |
| PWE 475525 | 4.750 | 5.260 | 4.907 | 0.255 | 0.468 |



Design

Claron Style CSW Rod wiper is designed to remove more tenacious mud and ice from a reciprocating rod during the negative stroke. It is classified as a heavy duty scraper. The scraper is precision moulded in Nylon (PA) with a filter of MOS_2 to improve the friction and wear characteristics of the material. The materials high modulus (stiffness) allow it to aggressively scrape larger debris from the rod. the wiper is designed with an outside sealing lip providing positive sealing on the housing thus preventing dirt and moisture from entering the system around the outside of the wiper.

Operating Conditions

Continuous operating temp. in various fluids

Temp. range -40°C to 100°C

Max Linear Speed m/sec 5

Optimum service conditions are affected by temperature, speed and surface finish.
Refer to Appendix 1 for further information.


| PA Nylon | | |
|----------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 120 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 120 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 120 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 120 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 120 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | 80 |
| HFD S | Chlorinated hydrocarbon based | 80 |
| HFD T | Mixtures of HFD R and HFD S | 80 |
| HEPG | Polyglycol based | 100 |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 100 |

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.
Refer to Appendix 4 for value of tolerance symbols.

Fitting



Styles CSW & CSWM are designed to snap fit into its housing. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.
For a detailed checklist, refer to Appendix 3.

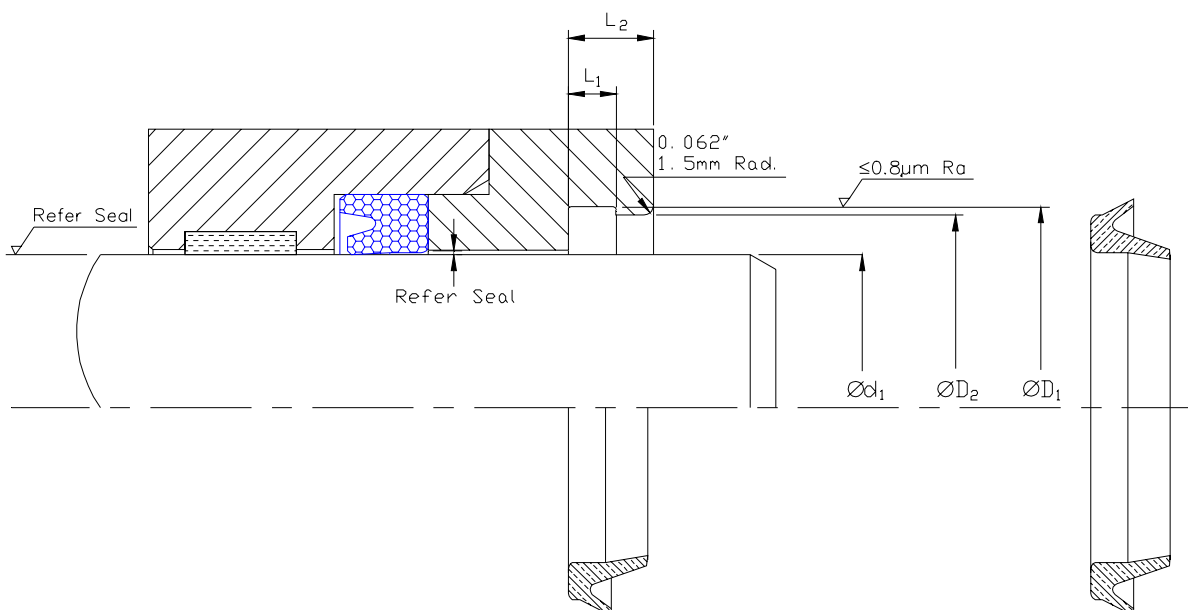

ClaronPolyseal®
Single Acting Rod Wiper Seal



Metric

CSWM



Nominal Dimensions & Machining Tolerances



| Claron Part Number | Refer Seal Selection $\varnothing d_1$ | +0.20 -0.00 $\varnothing D_1$ | +0.20 -0.00 $\varnothing D_2$ | +0.20 -0.00 L_1 | Nominal L_2 |
|--------------------|---|-------------------------------------|-------------------------------------|-------------------------|------------------|
| CSWM 016 | 16 | 26 | 24.5 | 4.5 | 6.5 |
| CSWM 018 | 18 | 28 | 26.5 | 4.5 | 6.5 |
| CSWM 020 | 20 | 33 | 31.5 | 6.0 | 8.5 |
| CSWM 022 | 22 | 35 | 33.5 | 6.0 | 8.5 |
| CSWM 025 | 25 | 38 | 36.5 | 6.0 | 8.5 |
| CSWM 028 | 28 | 41 | 39.5 | 6.0 | 8.5 |
| CSWM 030 | 30 | 43 | 41.5 | 6.0 | 8.5 |
| CSWM 032 | 32 | 45 | 43.5 | 6.0 | 8.5 |
| CSWM 036 | 36 | 49 | 47.5 | 6.0 | 8.5 |
| CSWM 040 | 40 | 53 | 51.5 | 6.0 | 8.5 |
| CSWM 045 | 45 | 58 | 56.5 | 6.0 | 8.5 |
| CSWM 050 | 50 | 63 | 61.5 | 6.0 | 8.5 |
| CSWM 055 | 55 | 68 | 66.5 | 6.0 | 8.5 |
| CSWM 056 | 56 | 69 | 67.5 | 6.0 | 8.5 |
| CSWM 060 | 60 | 73 | 71.5 | 6.0 | 8.5 |
| CSWM 063 | 63 | 76 | 74.5 | 6.0 | 8.5 |
| CWSM 065 | 65 | 78 | 76.5 | 6.0 | 8.5 |
| CSWM 070 | 70 | 83 | 81.5 | 6.0 | 8.5 |
| CSWM 080 | 80 | 93 | 91.5 | 6.0 | 8.5 |
| CSWM 090 | 90 | 103 | 101.5 | 6.0 | 8.5 |
| CSWM 100 | 100 | 113 | 111.5 | 6.0 | 8.5 |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection $\text{Ø}d_1$ | +0.008 -0.000 $\text{Ø}D_1$ | +0.008 -0.000 $\text{Ø}D_2$ | +0.008 -0.000 L_1 | Nominal L_2 |
|-----------------------|--|-----------------------------------|-----------------------------------|---------------------------|------------------|
| CSW 050 | 0.500 | 0.875 | 0.812 | 0.172 | 0.250 |
| CSW 062 | 0.625 | 1.000 | 0.938 | 0.172 | 0.250 |
| CSW 075 | 0.750 | 1.250 | 1.187 | 0.234 | 0.345 |
| CSW 087 | 0.875 | 1.375 | 1.312 | 0.234 | 0.345 |
| CSW 100 | 1.000 | 1.500 | 1.437 | 0.234 | 0.345 |
| CSW 112 | 1.125 | 1.625 | 1.562 | 0.234 | 0.345 |
| CSW 125 | 1.250 | 1.750 | 1.687 | 0.234 | 0.345 |
| CSW 137 | 1.375 | 1.875 | 1.812 | 0.234 | 0.345 |
| CSW 150 | 1.500 | 2.000 | 1.937 | 0.234 | 0.345 |
| CSW 162 | 1.625 | 2.125 | 2.062 | 0.234 | 0.345 |
| CSW 175 | 1.750 | 2.250 | 2.187 | 0.234 | 0.345 |
| CSW 200 | 2.000 | 2.500 | 2.437 | 0.234 | 0.345 |
| CSW 212 | 2.125 | 2.625 | 2.562 | 0.234 | 0.345 |
| CSW 225 | 2.250 | 2.750 | 2.687 | 0.234 | 0.345 |
| CSW 250 | 2.500 | 3.000 | 2.937 | 0.234 | 0.345 |
| CSW 275 | 2.750 | 3.250 | 3.187 | 0.234 | 0.345 |
| CSW 300 | 3.000 | 3.500 | 3.437 | 0.234 | 0.345 |
| CSW 325 | 3.250 | 3.750 | 3.687 | 0.234 | 0.345 |
| CSW 350 | 3.500 | 4.000 | 3.937 | 0.234 | 0.345 |
| CSW 375 | 3.750 | 4.250 | 4.187 | 0.234 | 0.345 |
| CSW 400 | 4.000 | 4.500 | 4.437 | 0.234 | 0.345 |

Claron Polyseal® Single Acting Rod Wiper Seal Imperial PMW



Design

Claron Style PMW metal cased Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a medium to heavy duty rod wiper/scrapper. The wiper is precision moulded in 98° Shore Polyurethane with an accurately machined lip. The high modulus (stiffness) of this material allows the wiper to scrape tenacious mud and dirt from the rod. The wiper has a metal case designed to press fit in the housing thus retaining the wiper. The metal case is coated with a corrosion resistant yellow Zinc plating. The press fit design of this wiper allows it to be used in simple 'open ended' housing.

Operating Conditions

| | |
|------------------------|----------------|
| Temp. range | -40°C to 110°C |
| Max Linear Speed m/sec | 3.0 |

Optimum service conditions are affected by temperature, speed and surface finish.
Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

Housing



For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.
Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style PMW is designed to press fit into an open ended housing. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.
For a detailed checklist, refer to Appendix 3.

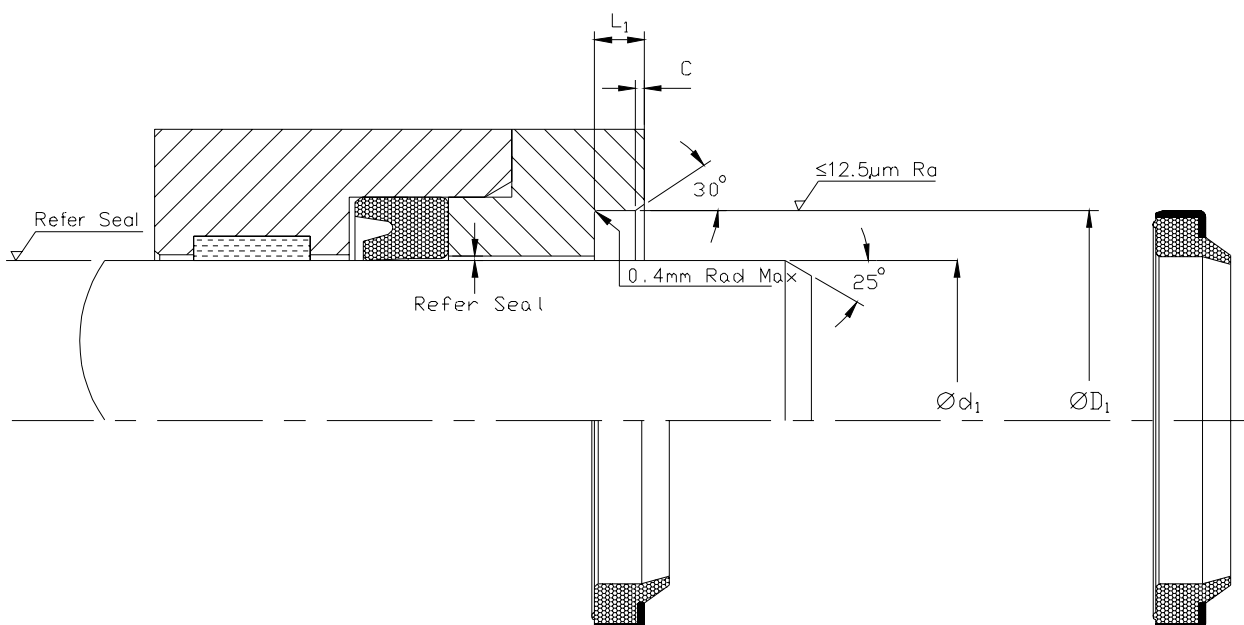


ClaronPolyseal®
Single Acting Rod Wiper Seal Imperial
PMW



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection $\text{Ø}d_1$ | H8 $\text{Ø}D_1$ | +0.020 -0.000 L_1 | Nominal L_2 |
|-----------------------|--|---------------------|---------------------------|------------------|
| PMW 1000 | 1.000 | 1.375 | 0.218 | 0.281 |
| PMW 1250 | 1.250 | 1.625 | 0.218 | 0.281 |
| PMW 1500 | 1.500 | 1.875 | 0.218 | 0.281 |



PFB



Design

Claron **Style PFB** double acting Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke and to assist sealing by collecting the fluid film on the positive stroke. It is classified as a medium to heavy duty rod wiper. The wiper is precision moulded in 80° Shore Nitrile Rubber with an accurately machined lip. The wiper has a metal case designed to press fit in the housing thus retaining the wiper. The press fit design of this wiper allows it to be used in a simple open ended housing. The sizes are to common Japanese housing standards.

Claron Wiper Seals **Style PFB** should not be utilised in combination with double-acting Rod seals unless the housing design allows for pressure relief between the wiper and the seal.

Operating Conditions

Temp. range -30°C to 100°C

Max. Linear Speed m/sec 3.0

Optimum service conditions are affected by temperature, speed and surface finish.

Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids

| NBR Rubber | | |
|------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | NS |
| HFD S | Chlorinated hydrocarbon based | NS |
| HFD T | Mixtures of HFD R and HFD S | NS |
| HEPG | Polyglycol based | NS |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | NS |

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.


Refer to Appendix 4 for value of tolerance symbols.

Fitting


Style PFB is designed to press fit into the open ended housings. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.

For a detailed checklist, refer to Appendix 3.

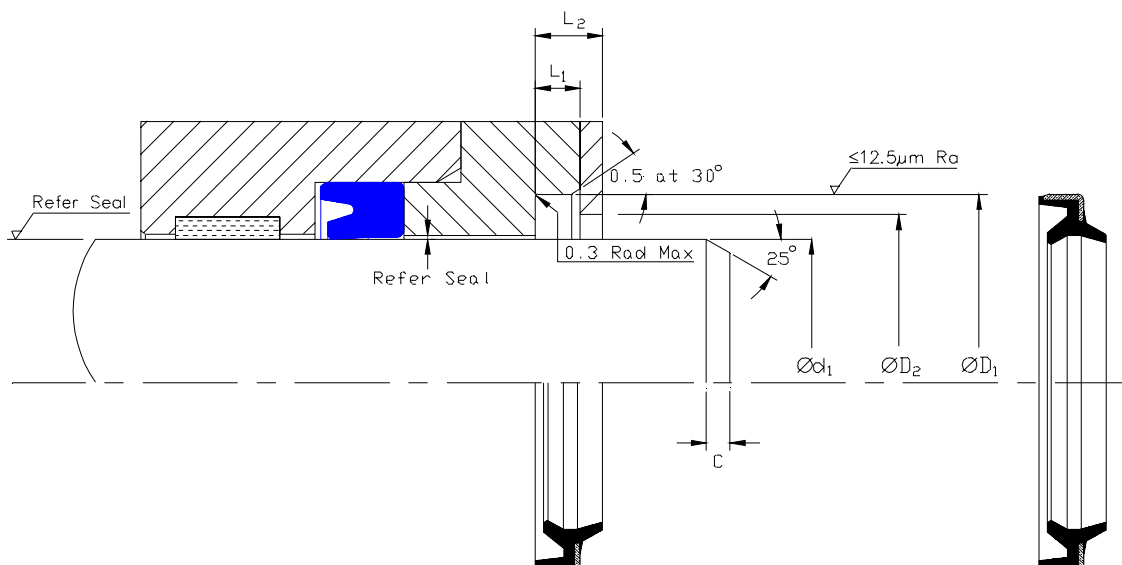





PFB



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød_1 | H8 ØD_1 | +0.30 -0.00 ØD_2 | +0.60 +0.40 L_1 | Nominal L_2 |
|-----------------------|--|---------------------|---------------------------------|-------------------------|------------------|
| PFB 022033 | 22 | 33 | 28 | 6 | 9 |
| PFB 025037 | 25 | 37 | 31 | 6 | 9 |
| PFB 030042 | 30 | 42 | 36 | 6 | 9 |
| PFB 035047 | 35 | 47 | 41 | 6 | 9 |
| PFB 040052 | 40 | 52 | 46 | 7 | 10 |
| PFB 045057 | 45 | 57 | 51 | 7 | 10 |
| PFB 050062 | 50 | 62 | 56 | 7 | 10 |
| PFB 055069 | 55 | 69 | 62 | 8 | 11 |
| PFB 060074 | 60 | 74 | 67 | 8 | 11 |
| PFB 065079 | 65 | 79 | 72 | 8 | 11 |
| PFB 070084 | 70 | 84 | 77 | 8 | 11 |
| PFB 075089 | 75 | 89 | 82 | 8 | 11 |
| PFB 080094 | 80 | 94 | 87 | 8 | 11 |
| PFB 085099 | 85 | 99 | 92 | 8 | 11 |
| PFB 090104 | 90 | 104 | 97 | 8 | 11 |
| PFB 095109 | 95 | 109 | 102 | 8 | 11 |
| PFB 100114 | 100 | 114 | 107 | 8 | 11 |
| PFB 110126 | 110 | 126 | 118 | 9 | 12 |
| PFB 120136 | 120 | 136 | 128 | 9 | 12 |
| PFB 130146 | 130 | 146 | 138 | 9 | 12 |
| PFB 140160 | 140 | 160 | 150 | 10 | 14 |
| PFB 155175 | 155 | 175 | 165 | 10 | 14 |
| PFB 160180 | 160 | 180 | 170 | 10 | 14 |
| PFB 170190 | 170 | 190 | 180 | 10 | 14 |



Design

Claron **Style PFP** double acting Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke and to assist sealing by collecting the fluid film on the positive stroke. It is classified as a heavy duty rod wiper. The wiper is precision moulded in 92° Shore A Polyurethane with an accurately machined lip. The wiper has a metal case designed to press fit in the housing thus retaining the wiper. The press fit design of this wiper allows it to be used in a simple open ended housing. The sizes are to common Japanese housing standards. Claron Wiper Seals Style PFP should not be utilised in combination with double-acting Rod seals unless the housing design allows for pressure relief between the wiper and the seal.

Operating Conditions

| | |
|------------------------|----------------|
| Temp. range | -40°C to 110°C |
| Max Linear Speed m/sec | 3.0 |

Optimum service conditions are affected by temperature, speed and surface finish. Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to appendix 4 for value of tolerance symbols.


Fitting

Style PFP is designed to press fit into the open ended housings. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

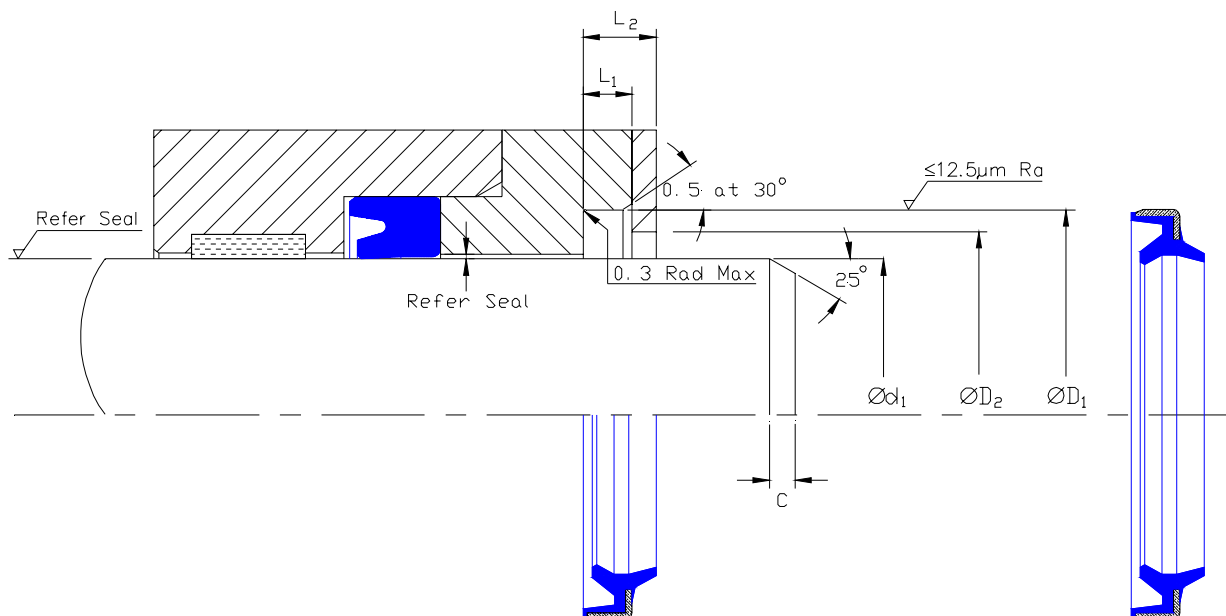



PFP



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection $\text{Ø}d_1$ | H8 $\text{Ø}D_1$ | +0.30 -0.00 $\text{Ø}D_2$ | +0.30 -0.00 L_1 | Nominal L_2 |
|-----------------------|--|---------------------|---------------------------------|-------------------------|------------------|
| PFP 020033 | 20 | 33 | 28 | 6 | 9 |
| PFP 025037 | 25 | 37 | 32 | 6 | 9 |
| PFP 030042 | 30 | 42 | 37 | 6 | 9 |
| PFP 035047 | 35 | 47 | 42 | 7 | 10 |
| PFP 035047/1 | 35 | 47 | 47 | 7 | 10 |
| PFP 040050/1 | 40 | 50 | 47 | 7 | 10 |
| PFP 040052 | 40 | 52 | 47 | 7 | 10 |
| PFP 040052/1 | 40 | 52 | 47 | 7 | 10 |
| PFP 045057 | 45 | 57 | 52 | 7 | 10 |
| PFP 045057/1 | 45 | 57 | 52 | 7 | 10 |
| PFP 050062 | 50 | 62 | 57 | 7 | 10 |
| PFP 050062/1 | 50 | 62 | 57 | 7 | 10 |
| PFP 055069 | 55 | 69 | 62 | 8 | 11 |
| PFP 060074 | 60 | 74 | 67 | 8 | 11 |
| PFP 065079 | 65 | 79 | 72 | 8 | 11 |
| PFP 070084 | 70 | 84 | 77 | 8 | 11 |
| PFP 075089 | 75 | 89 | 82 | 8 | 11 |
| PFP 080094 | 80 | 94 | 87 | 8 | 12 |
| PFP 085099 | 85 | 99 | 92 | 8 | 11 |
| PFP 090104 | 90 | 104 | 97 | 8 | 11 |
| PFP 095109 | 95 | 109 | 102 | 8 | 12 |
| PFP 100114 | 100 | 114 | 107 | 8 | 11 |
| PFP 110126 | 110 | 126 | 118 | 9 | 12 |
| PFP 120136 | 120 | 136 | 128 | 9 | 12 |
| PFP 130146 | 130 | 146 | 138 | 9 | 12 |
| PFP 140160 | 140 | 160 | 150 | 10 | 14 |
| PFP 150170 | 150 | 170 | 160 | 10 | 14 |
| PFP 160180 | 160 | 180 | 170 | 10 | 14 |
| PFP 200225 | 200 | 225 | 212 | 12 | 17 |

ClaronPolyseal®
Single Acting Rod Wiper Seal
UPWM

Metric

Design

Claron Style UPWM Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a medium to heavy duty wiper and is precision moulded in 92rd Shore A Polyurethane. The wiper is machine trimmed to provide a precise wiping lip.

Operating Conditions

| | |
|------------------------|----------------|
| Temp. range | -40°C to 110°C |
| Max Linear Speed m/sec | 3.0 |

Optimum service conditions are affected by temperature, speed and surface finish.
Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.
Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style UPWM may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.
For a detailed checklist, refer to Appendix 3.

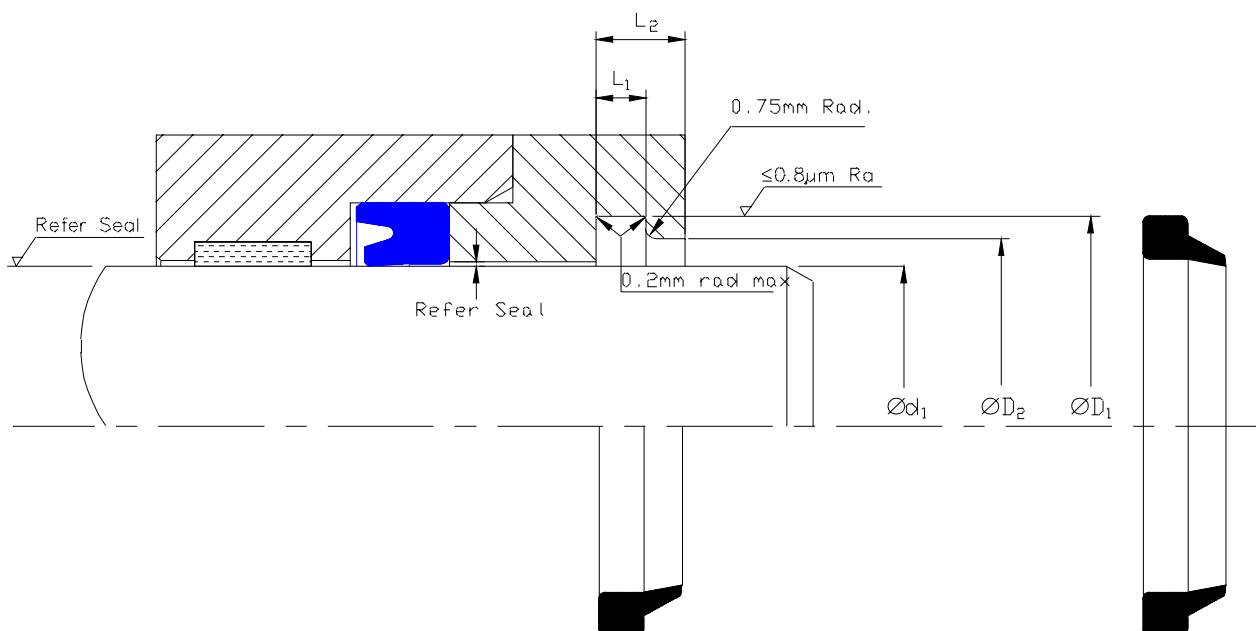

ClaronPolyseal®
Single Acting Rod Wiper Seal

Metric

UPWM



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection $\varnothing d_1$ | H11 $\varnothing D_1$ | H11 $\varnothing D_2$ | +0.20 -0.00 L_1 | Nominal L_2 |
|--------------------|---|--------------------------|--------------------------|-------------------------|------------------|
| UPWM 30 | 30.00 | 38.60 | 33.00 | 5.30 | 7.00 |
| UPWM 40 | 40.00 | 50.00 | 45.00 | 7.10 | 12.00 |
| UPWM 50 | 50.00 | 60.00 | 55.00 | 7.10 | 12.00 |
| UPWM 60 | 60.00 | 70.00 | 65.00 | 7.10 | 12.00 |
| UPWM 65 | 65.00 | 75.00 | 70.00 | 7.10 | 12.00 |

Claron Polyseal® Double Acting Rod Wiper Seal

Metric

PWD



Design

Designed to preclude the ingress of contaminants into the system as well as assist in sealing the Rod. Produced in Polyurethane, the wiper is designed to fit into closed housings with pre-loading of the static face providing stability and sealing. The wiper is profiled such that the lip facing the media collects fluid passing the rod seal. The use of Polyurethane with its excellent properties combined with the proportioned design of the wiper will extend the service life of the rod seal. Claron Wiper Seals **Style PWD** should not be utilised in combination with double-acting Rod seals unless the housing design allows for pressure relief between the wiper and the seal.

Operating Conditions

| | |
|--------------------|----------------|
| Temp. Range | -40°C to 110°C |
| Linear Speed m/sec | 3.0 |

Optimum service conditions are affected by temperature, speed and surface finish.
Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.
Refer to Appendix 4 for value of tolerance symbols.
Style PWD may be deformed and fitted into a closed groove.


Fitting

For the wiper to function correctly, it is important that care be taken in fitting the wiper within its housing.
For a detailed checklist, refer to Appendix 3.

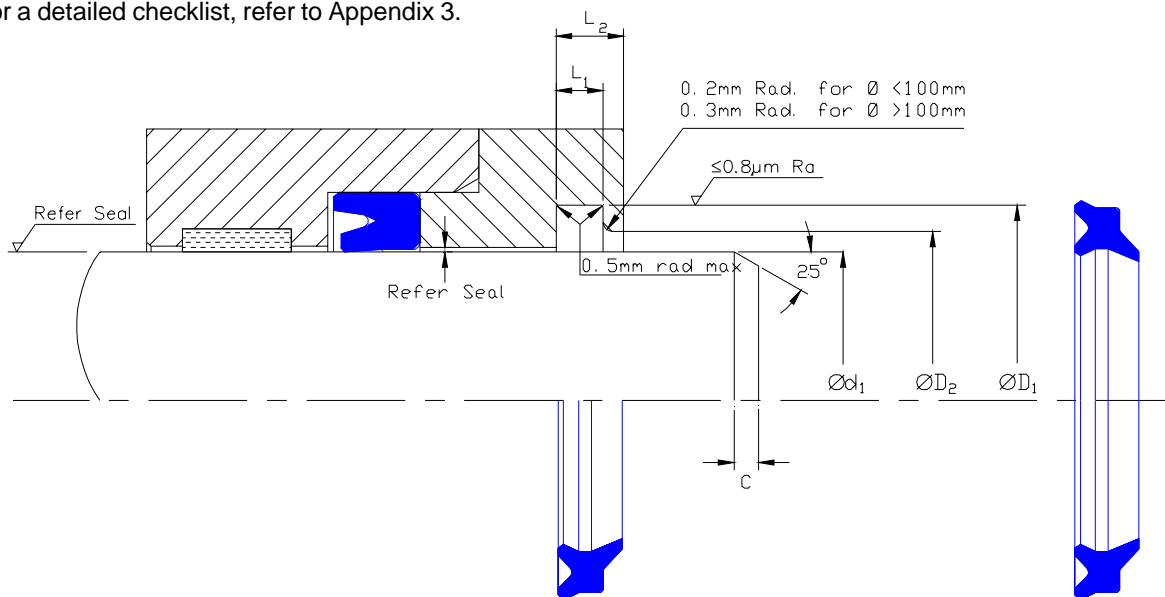



PWD



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection $\text{Ø}d_1$ | H11 | H11 | +0.10 -0.00 L_1 | Min. L_2 |
|-----------------------|--|---------------|---------------|-------------------------|---------------|
| | | $\text{Ø}D_1$ | $\text{Ø}D_2$ | | |
| PWD 018 | 18 | 24.0 | 20.5 | 4.0 | 7 |
| PWD 025/1 | 25 | 33.6 | 28.0 | 5.3 | 7 |
| PWD 030 | 30 | 38.0 | 33.0 | 5.2 | 6 |
| PWD 030/2 | 30 | 40.0 | 35.0 | 7.0 | 10 |
| PWD 035/1 | 35 | 43.6 | 38.0 | 5.3 | 7 |
| PWD 040 | 40 | 48.0 | 43.0 | 5.2 | 6 |
| PWD 042/1 | 42 | 50.6 | 45.0 | 5.3 | 7 |
| PWD 045/2 | 45 | 55.6 | 48.0 | 5.3 | 7 |
| PWD 048/1 | 48 | 56.6 | 51.0 | 5.3 | 7 |
| PWD 050 | 50 | 58.0 | 53.0 | 5.2 | 6 |
| PWD 055/2 | 55 | 65.6 | 58.0 | 5.3 | 7 |
| PWD 060 | 60 | 70.0 | 63.0 | 6.2 | 7 |
| PWD 065 | 65 | 75.0 | 68.0 | 6.2 | 7 |
| PWD 070 | 70 | 80.0 | 73.0 | 6.2 | 7 |
| PWD 075 | 75 | 85.0 | 78.0 | 6.2 | 7 |
| PWD 080 | 80 | 90.0 | 83.0 | 6.2 | 7 |
| PWD 085 | 85 | 95.0 | 88.0 | 6.2 | 7 |
| PWD 090 | 90 | 100.0 | 93.0 | 6.2 | 7 |
| PWD 095 | 95 | 105.0 | 98.0 | 6.2 | 7 |
| PWD 100 | 100 | 110.0 | 103.0 | 6.2 | 7 |

ClaronPolyseal® Single Acting Rod Wiper Seal

Imperial

EW

Design

Claron Style EW Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a medium to heavy duty wiper and is precision moulded in 98°Shore A Polyurethane. The wiper is machine trimmed to provide a precise wiping lip.

Operating Conditions

Temp. range -40°C to 110°

Max Linear Speed m/sec 3.0

Optimum service conditions are affected by temperature, speed and surface finish.
Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.
Refer to Appendix 4 for value of tolerance symbols.

Fitting



Style EW may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.
For a detailed checklist, refer to Appendix 3.

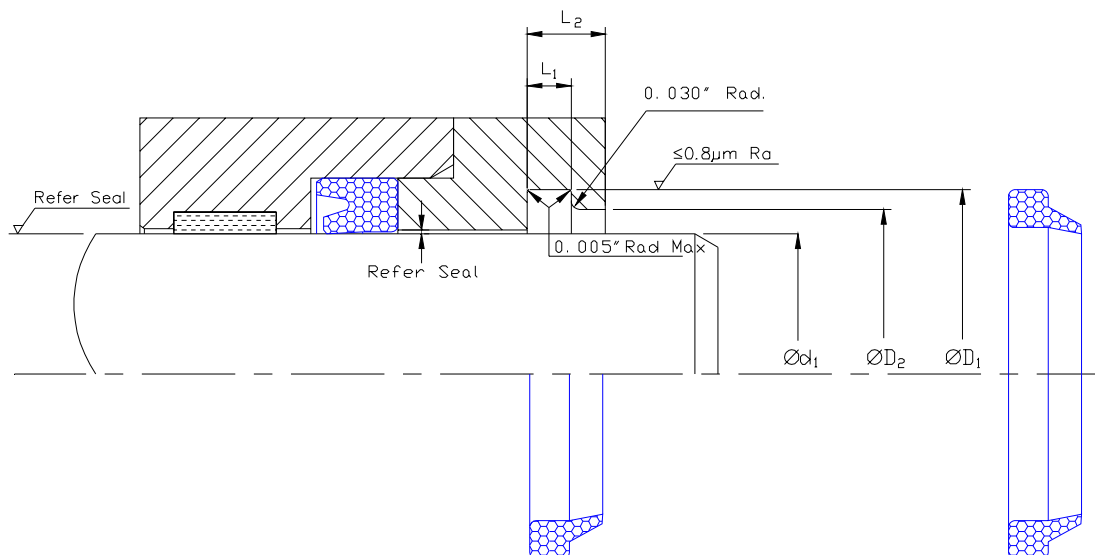

ClaronPolyseal®
Single Acting Rod Wiper Seal


EW

Imperial



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection $\varnothing d_1$ | +0.008 -0.000 $\varnothing D_1$ | +0.008 -0.000 $\varnothing D_2$ | +0.004 -0.000 L_1 | Nominal L_2 |
|-----------------------|--|---------------------------------------|---------------------------------------|---------------------------|------------------|
| EW 275 | 2.750 | 3.187 | 2.980 | 0.187 | 0.437 |
| EW 300 | 3.000 | 3.500 | 3.278 | 0.187 | 0.500 |
| EW 350 | 3.500 | 4.062 | 3.850 | 0.187 | 0.582 |
| EW 362 | 3.625 | 4.187 | 3.950 | 0.187 | 0.562 |
| EW 437 | 4.375 | 4.908 | 4.697 | 0.187 | 0.533 |
| EW 525 | 5.250 | 5.844 | 5.602 | 0.187 | 0.594 |
| EW 631 | 6.312 | 6.906 | 6.665 | 0.187 | 0.594 |
| EW 731 | 7.312 | 7.906 | 7.665 | 0.187 | 0.594 |
| EW 837 | 8.375 | 8.969 | 8.665 | 0.187 | 0.594 |




931
941
951

Single & Double Acting Rod Wiper Seals

Metric

931 941 951



Design

Claron Wiper Seals **Style 941** and **951** are designed as low friction **Double-acting** seals to assist the sealing capability of single-acting Rod seal arrangements in arduous conditions. Double Acting Wiper Seals **Style 941** and **951** should not be utilised in combination with double-acting Rod seals unless the housing design allows for pressure relief between the wiper and the seal.

Claron Wiper Seals **Style 931** are designed as low friction **Single-acting** Rod wiper seals for use with other single or double-acting Rod seals in hydraulic and pneumatic cylinders. This style does not offer any assistance to the sealing capability of the Rod seal and therefore would not be recommended for use where **Style 941** and **951** could be utilised. Housing sizes and tolerances for **Style 931** are identical to **Style 941**. **Style 951** utilises a separate range of installation sizes.

Materials

Standard materials are Virgin Modified P.T.F.E with a Nitrile O-Ring Energiser but both the inner wiper element and the energiser are available in a wide range of high performance materials to suit a variety of applications. The application parameters should be carefully considered prior to selecting suitable materials from the tables shown in Appendix 2-3. Consult Claron for further advise.

Operating Range

Temp. -50°C to 200°C, (Dependent upon O-Ring Material used see Appendix 2.)

Velocity upto 15m/s linear, 5m/s Rotary or Oscillating

These range parameters are maximum conditional values.

Optimum service conditions are affected by temperature, speed and surface finish.

Refer to Appendix 1 section for further information.

Range Of Installation Dimensions

The full range of diameters applicable to the "Standard", "Light" and "Heavy" Duty Sections are shown in the table below.


STYLES 931 and 941

| Housing | | Rod Dia. | | |
|---------|-------|----------------|----------------|----------------|
| Section | Width | Standard Duty | Light Duty | Heavy Duty |
| 2.4 | 3.7 | 6.0 to 11.9 | 12.0 to 64.9 | |
| 3.4 | 5.0 | 12.0 to 64.9 | 65.0 to 250.9 | 6.0 to 11.9 |
| 4.4 | 6.0 | 65.0 to 250.9 | 251.0 to 420.9 | 12.0 to 64.9 |
| 6.1 | 8.4 | 251.0 to 420.9 | 421.0 to 580.0 | 65.0 to 250.9 |
| 8.0 | 11.0 | 421.0 to 580.0 | | 251.0 to 420.9 |

STYLE 951

| Housing | | Rod Dia. | | |
|---------|-------|---------------|--------------|--------------|
| Section | Width | Standard Duty | Light Duty | Heavy Duty |
| 3.8 | 4.2 | 8.0 to 39.9 | 40 to 69.9 | |
| 4.4 | 6.3 | 40 to 69.9 | 70 to 139.9 | |
| 6.1 | 8.1 | 70 to 139.9 | 140 to 350.0 | |
| 8.0 | 9.5 | 140 to 399.9 | 400 to 580.0 | 100 to 139.9 |
| 12.0 | 14.0 | 400 to 580.0 | | 200 to 399.9 |

For Standard and Light Duty Sections split grooves should be utilised for Rod Diameters < 30mm
For Heavy Duty Sections use split grooves for Rod Diameters <40mm



How To Order

When ordering, prefix the size reference with the style required and use the suffix shown in the material application tables.


- e.g. 931 Standard section in Virgin Modified material for 70mm Rod **931-0700/VM**
- 941 Light duty section in Virgin Modified material for 70 mm Rod **941-0700/1VM**
- 941 Heavy duty section in Carbon filled material for 70 mm Rod **941-0700/2C**
- 951 Standard section in Virgin Modified material for 70mm Rod **951-0700/VM**

For O-Ring energiser materials other than Nitrile, use suffix shown in material table
e.g. Flourocarbon material (FKM), **941-0700/VM/FKM**

Housing

For surface finish and lead in chamfers refer to the illustration below.

For Housing dimensions and tolerances refer to the table of recommended sizes.

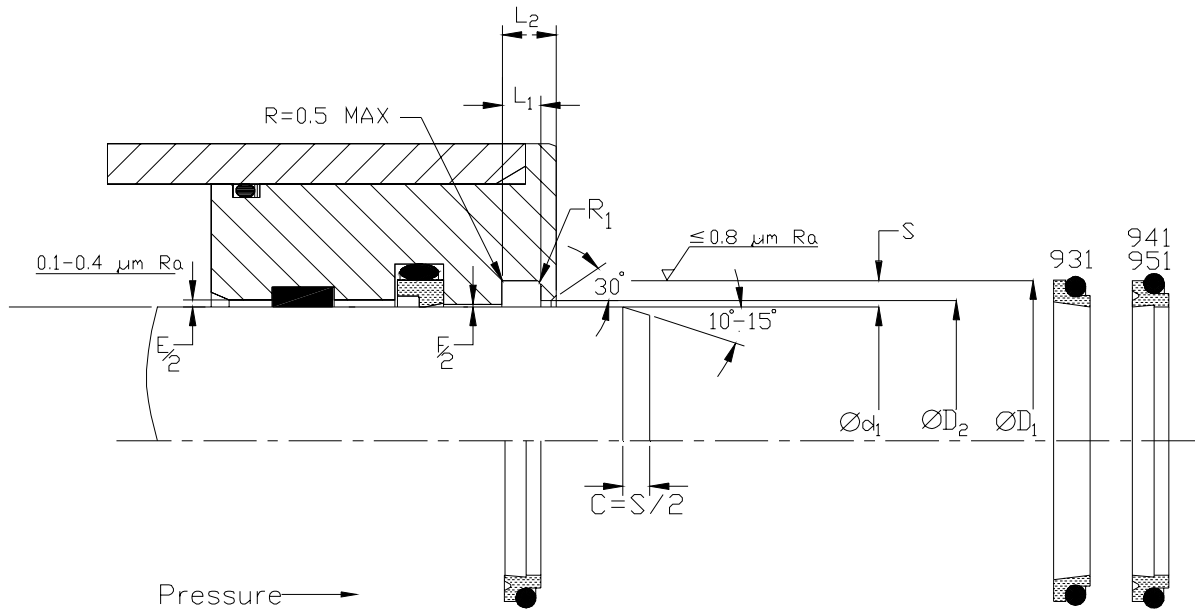


For F/2 values see note and tables

For E/2 values refer to P.T.F.E. Guide Tape

For Standard and Light Duty Sections split grooves should be utilised for Rod Diameters < 30mm
For Heavy Duty Sections use split grooves for Rod Diameters <40mm

Fitting

For the seal to function correctly it is important that care is taken during fitting.
For details refer to Appendix 3.




931

941

941


931



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 d ₁ | H9 D ₁ | +0.20 -0.00 D ₂ | +0.20 -0.00 L ₁ | Min L ₂ | SECT S | MAX R ₁ |
|--------------------|----------------------|----------------------|----------------------------------|----------------------------------|-----------------------|-----------|-----------------------|
| 941-0060/VM | 6.00 | 10.80 | 7.50 | 3.70 | 5.70 | 2.40 | 0.40 |
| 941-0063/VM | 6.35 | 11.15 | 7.85 | 3.70 | 5.70 | 2.40 | 0.40 |
| 941-0080/VM | 8.00 | 12.80 | 9.50 | 3.70 | 5.70 | 2.40 | 0.40 |
| 941-0100/VM | 10.00 | 14.80 | 11.50 | 3.70 | 5.70 | 2.40 | 0.40 |
| 941-0120/VM | 12.00 | 18.80 | 13.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0140/VM | 14.00 | 20.80 | 15.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0150/VM | 15.00 | 21.80 | 16.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0160/VM | 16.00 | 22.80 | 17.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0180/VM | 18.00 | 24.80 | 19.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0200/VM | 20.00 | 26.80 | 21.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0220/VM | 22.00 | 28.80 | 23.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0250/VM | 25.00 | 31.80 | 26.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0280/VM | 28.00 | 34.80 | 29.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0300/VM | 30.00 | 36.80 | 31.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0320/VM | 32.00 | 38.80 | 33.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0350/VM | 35.00 | 41.80 | 36.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0360/VM | 36.00 | 42.80 | 37.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0400/VM | 40.00 | 46.80 | 41.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0420/VM | 42.00 | 48.80 | 43.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0450/VM | 45.00 | 51.80 | 46.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0480/VM | 48.00 | 54.80 | 49.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0500/VM | 50.00 | 56.80 | 51.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0520/VM | 52.00 | 58.80 | 53.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0550/VM | 55.00 | 61.80 | 56.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0560/VM | 56.00 | 62.80 | 57.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0600/VM | 60.00 | 66.80 | 61.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0630/VM | 63.00 | 69.80 | 64.50 | 5.00 | 7.00 | 3.40 | 0.70 |
| 941-0650/VM | 65.00 | 73.80 | 66.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-0700/VM | 70.00 | 78.80 | 71.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-0750/VM | 75.00 | 83.80 | 76.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-0762/VM | 76.20 | 85.00 | 77.70 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-0800/VM | 80.00 | 88.80 | 81.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-0850/VM | 85.00 | 93.80 | 86.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-0900/VM | 90.00 | 98.80 | 91.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-0950/VM | 95.00 | 103.80 | 96.50 | 6.00 | 9.00 | 4.40 | 1.00 |


Dimensions in bold type conform to ISO 3320 :1987



931

Single & Double Acting Rod Wiper Seals

Metric



941


941

931

Nominal Dimensions & Machining Tolerances


| Claron Part Number | f8 d ₁ | H9 D ₁ | +0.20 -0.00 D ₂ | +0.20 -0.00 L ₁ | Min L ₂ | SECT S | MAX R ₁ |
|--------------------|----------------------|----------------------|----------------------------------|----------------------------------|-----------------------|-----------|-----------------------|
| 941-1000/VM | 100.00 | 108.80 | 101.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1050/VM | 105.00 | 113.80 | 106.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1100/VM | 110.00 | 118.80 | 111.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1150/VM | 115.00 | 123.80 | 116.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1200/VM | 120.00 | 128.80 | 121.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1250/VM | 125.00 | 133.80 | 126.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1300/VM | 130.00 | 138.80 | 131.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1350/VM | 135.00 | 143.80 | 136.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1400/VM | 140.00 | 148.80 | 141.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1500/VM | 150.00 | 158.80 | 151.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1600/VM | 160.00 | 168.80 | 161.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1700/VM | 170.00 | 178.80 | 171.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1800/VM | 180.00 | 188.80 | 181.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-1900/VM | 190.00 | 198.80 | 191.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-2000/VM | 200.00 | 208.80 | 201.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-2100/VM | 210.00 | 218.80 | 211.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-2200/VM | 220.00 | 228.80 | 221.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-2300/VM | 230.00 | 238.80 | 231.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-2400/VM | 240.00 | 248.80 | 241.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-2500/VM | 250.00 | 258.80 | 251.50 | 6.00 | 9.00 | 4.40 | 1.00 |
| 941-2800/VM | 280.00 | 292.20 | 282.00 | 8.40 | 11.40 | 6.10 | 1.20 |
| 941-3000/VM | 300.00 | 312.20 | 302.00 | 8.40 | 11.40 | 6.10 | 1.20 |
| 941-3200/VM | 320.00 | 332.20 | 322.00 | 8.40 | 11.40 | 6.10 | 1.20 |
| 941-3500/VM | 350.00 | 362.20 | 352.00 | 8.40 | 11.40 | 6.10 | 1.20 |
| 941-3600/VM | 360.00 | 372.20 | 362.00 | 8.40 | 11.40 | 6.10 | 1.20 |
| 941-4000/VM | 400.00 | 412.20 | 402.00 | 8.40 | 11.40 | 6.10 | 1.20 |
| 941-4200/VM | 420.00 | 432.20 | 422.00 | 8.40 | 11.40 | 6.10 | 1.20 |
| 941-4500/VM | 450.00 | 466.00 | 452.00 | 11.00 | 15.00 | 8.00 | 1.50 |
| 941-4800/VM | 480.00 | 496.00 | 482.00 | 11.00 | 15.00 | 8.00 | 1.50 |
| 941-5000/VM | 500.00 | 516.00 | 502.00 | 11.00 | 15.00 | 8.00 | 1.50 |

Dimensions in bold type conform to ISO 3320 :1987
 All intermediate sizes upto 580mm are available, incl. Imperial



951



951



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 d ₁ | H9 D ₁ | +0.20 -0.20 D ₂ | +0.20 -0.00 L ₁ | Min L ₂ | SECT S | MAX R ₁ |
|--------------------|----------------------|----------------------|----------------------------------|----------------------------------|-----------------------|-----------|-----------------------|
| 951-0080/VM | 8.00 | 15.60 | 9.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0100/VM | 10.00 | 17.60 | 11.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0120/VM | 12.00 | 19.60 | 13.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0140/VM | 14.00 | 21.60 | 15.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0150/VM | 15.00 | 22.60 | 16.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0160/VM | 16.00 | 23.60 | 17.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0180/VM | 18.00 | 25.60 | 19.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0200/VM | 20.00 | 27.60 | 21.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0220/VM | 22.00 | 29.60 | 23.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0250/VM | 25.00 | 32.60 | 26.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0280/VM | 28.00 | 35.60 | 29.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0300/VM | 30.00 | 37.60 | 31.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0320/VM | 32.00 | 39.60 | 33.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0350/VM | 35.00 | 42.60 | 36.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0360/VM | 36.00 | 43.60 | 37.00 | 4.20 | 7.20 | 3.80 | 0.70 |
| 951-0400/VM | 40.00 | 48.80 | 41.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0420/VM | 42.00 | 50.80 | 43.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0450/VM | 45.00 | 53.80 | 46.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0480/VM | 48.00 | 56.80 | 49.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0500/VM | 50.00 | 58.80 | 51.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0520/VM | 52.00 | 60.80 | 53.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0550/VM | 55.00 | 63.80 | 56.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0560/VM | 56.00 | 64.80 | 57.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0600/VM | 60.00 | 68.80 | 61.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0630/VM | 63.00 | 71.80 | 64.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0650/VM | 65.00 | 73.80 | 66.50 | 6.30 | 9.30 | 4.40 | 0.70 |
| 951-0700/VM | 70.00 | 82.20 | 72.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-0750/VM | 75.00 | 87.20 | 77.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-0762/VM | 76.20 | 88.40 | 78.20 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-0800/VM | 80.00 | 92.20 | 82.00 | 8.10 | 12.10 | 6.10 | 1.00 |



Dimensions in bold type conform to ISO 3320 :1987



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | H9 | +0.20 -0.20 | +0.20 -0.00 | Min | SECT | MAX |
|-----------------------|----------------|----------------|----------------|----------------|----------------|-------|----------------|
| | d ₁ | D ₁ | D ₂ | L ₁ | L ₂ | S | R ₁ |
| 951-0850/VM | 85.00 | 97.20 | 87.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-0900/VM | 90.00 | 102.20 | 92.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-0950/VM | 95.00 | 107.20 | 97.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-1000/VM | 100.00 | 112.20 | 102.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-1050/VM | 105.00 | 117.20 | 105.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-1100/VM | 110.00 | 122.20 | 112.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-1150/VM | 115.00 | 127.20 | 117.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-1200/VM | 120.00 | 132.20 | 122.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-1250/VM | 125.00 | 137.20 | 127.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-1300/VM | 130.00 | 142.20 | 132.00 | 8.10 | 12.10 | 6.10 | 1.00 |
| 951-1350/VM | 135.00 | 147.20 | 137.00 | 8.10 | 12.10 | 8.00 | 1.00 |
| 951-1400/VM | 140.00 | 156.00 | 142.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-1500/VM | 150.00 | 166.00 | 152.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-1600/VM | 160.00 | 176.00 | 162.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-1700/VM | 170.00 | 186.00 | 172.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-1800/VM | 180.00 | 196.00 | 182.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-1900/VM | 190.00 | 206.00 | 192.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-2000/VM | 200.00 | 216.00 | 202.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-2100/VM | 210.00 | 226.00 | 212.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-2200/VM | 220.00 | 236.00 | 222.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-2300/VM | 230.00 | 246.00 | 232.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-2400/VM | 240.00 | 256.00 | 242.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-2500/VM | 250.00 | 266.00 | 252.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-2800/VM | 280.00 | 296.00 | 282.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-3000/VM | 300.00 | 316.00 | 302.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-3200/VM | 320.00 | 336.00 | 322.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-3500/VM | 350.00 | 366.00 | 352.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-3600/VM | 360.00 | 376.00 | 362.50 | 9.50 | 14.50 | 8.00 | 1.20 |
| 951-4000/VM | 400.20 | 424.00 | 402.50 | 14.00 | 22.00 | 12.00 | 1.50 |
| 951-4200/VM | 420.00 | 444.00 | 422.50 | 14.00 | 22.00 | 12.00 | 1.50 |
| 951-4500/VM | 450.00 | 474.00 | 452.50 | 14.00 | 22.00 | 12.00 | 1.50 |
| 951-4800/VM | 480.00 | 504.00 | 482.50 | 14.00 | 22.00 | 12.00 | 1.50 |
| 951-5000/VM | 500.00 | 524.00 | 502.50 | 14.00 | 22.00 | 12.00 | 1.50 |
| 951-5500/VM | 550.00 | 574.00 | 552.50 | 14.00 | 22.00 | 12.00 | 1.50 |

Dimensions in bold type conform to ISO 3320 :1987
 All intermediate sizes upto 580mm are available, incl. Imperial



Design

Designed to prevent the ingress of contaminants into the system thus extending the service life of the cylinder in applications where there is a risk of large accumulations of dirt on the Rod such as earth moving equipment. The Wiper is designed with positive seating of the outside face and beads on the inside diameter. These features provide sealing on the static face as well as stability in the housing. The Wiper is produced in 98° Shore A Polyurethane which offers a high level of stiffness providing the Wiper with the ability to remove dried on mud from the Rod. The material also has excellent wear properties for a long service life even under arduous conditions. The Wiper is designed to fit into closed housings.

Operating Conditions

Temp. Range -40°C to 110°C

Max Linear Speed m/sec 3.0

Optimum service conditions are affected by temperature, speed and surface finish.

Refer to Appendix 1 for further information.

Continuous operating temperature for various fluids

| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.


Refer to Appendix 4 for value of tolerance symbols.

Style PWC Wiper maybe deformed and fitted into a closed groove housing.



Fitting

For the wiper to function correctly, it is important that care be taken in fitting the wiper within its housing.

For a detailed checklist, refer to Appendix 3.

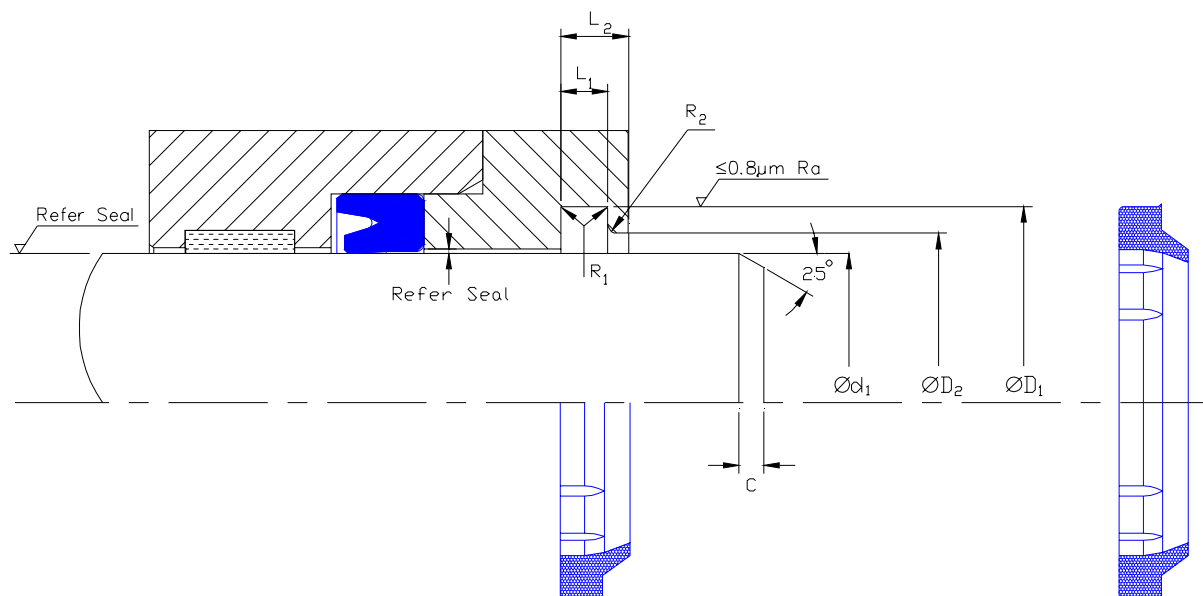

PWC



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød ₁ | H11 | H11 | +0.20 -0.00 L ₁ | Min. | Nominal. | Nominal. |
|-----------------------|--|-----------------|-----------------|----------------------------------|----------------|----------------|----------------|
| | | ØD ₁ | ØD ₂ | | L ₂ | R ₁ | R ₂ |
| PWC 045 | 45 | 53 | 50.5 | 5 | 8 | 0.4 | 0.2 |
| PWC 050 | 50 | 58 | 55.5 | 5 | 8 | 0.4 | 0.2 |

Single Acting Rod Wiper Seal Imperial PWK

Design

Claron **Style PWK** Rod wiper is designed to remove potential system contaminants from a reciprocating rod during the negative stroke. It is classified as a medium to heavy duty wiper and is precision moulded in 92° shore Polyurethane. The wiper is machine trimmed to provide a precise wiping lip. The design incorporates ribs on the heel working face to ensure concentricity and stability.

Operating Conditions

| | |
|------------------------|----------------|
| Temp. range | -40°C to 110°C |
| Max Linear Speed m/sec | 3.0 |

Optimum service conditions are affected by temperature, speed and surface finish.
Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |

Housing



For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.
Refer to Appendix 4 for value of tolerance symbols.

Fitting

Style PWK may be deformed and fitted into a closed groove housing as shown below. For the seal to function correctly, it is important that care be taken in fitting the seal within its housing.
For a detailed checklist, refer to Appendix 3.

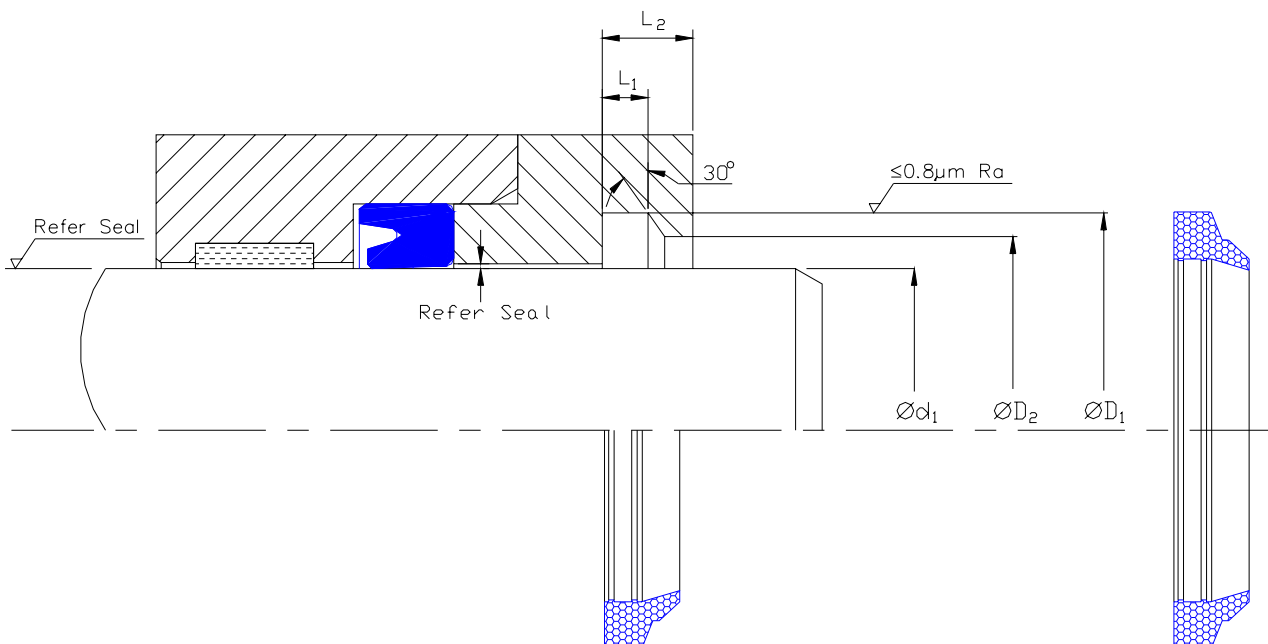


PWK



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Refer Seal Selection Ød ₁ | +0.005 -0.000 ØD ₁ | +0.005 -0.000 ØD ₂ | +0.005 - 0.000 L ₁ | Nominal L ₂ |
|--------------------|---|-------------------------------------|-------------------------------------|-------------------------------------|---------------------------|
| PWK 1000 | 1.000 | 1.385 | 1.082 | 0.195 | 0.343 |
| PWK 1250 | 1.250 | 1.635 | 1.332 | 0.195 | 0.343 |
| PWK 1375 | 1.375 | 1.760 | 1.457 | 0.195 | 0.343 |
| PWK 1500 | 1.500 | 1.885 | 1.582 | 0.195 | 0.343 |
| PWK 1500A | 1.500 | 1.760 | 1.582 | 0.183 | 0.295 |
| PWK 1750 | 1.750 | 2.135 | 1.832 | 0.195 | 0.343 |
| PWK 1875 | 1.875 | 2.260 | 1.957 | 0.195 | 0.343 |
| PWK 2000 | 2.000 | 2.385 | 2.082 | 0.195 | 0.343 |
| PWK 2000A | 2.000 | 2.260 | 2.082 | 0.183 | 0.295 |
| PWK 2250 | 2.250 | 2.760 | 2.405 | 0.255 | 0.468 |
| PWK 2500 | 2.500 | 3.010 | 2.657 | 0.255 | 0.468 |
| PWK 2750 | 2.750 | 3.260 | 2.905 | 0.255 | 0.468 |
| PWK 3000 | 3.000 | 3.510 | 3.157 | 0.255 | 0.468 |

SECTION E POLYMERIC PLAIN BEARINGS



Bearing selection

Claron produce four main types of polymer bearings for use in hydraulic cylinder applications. Each has a varying set of properties to cover a wide range of applications. The following tables are designed to help select the correct type for a given application.

Table 1 shows the properties for each type of bearing. Values shown as low/high should be interpreted as relative to each other.

| | BGF | BT | EBR | PBR |
|------------------------------|----------------------|--------------------|--------|---------------------|
| Material | Modified & Filled PA | Bronze Filled PTFE | POM | Reinforced Phenolic |
| Max Operating Temp °C | 110 | 200 | 110 | 120 |
| Max Linear Velocity m/s | 1.5 | 15 | 1 | 3 |
| Coefficient of friction | 0.15 | 0.06 | 0.14 | 0.12 |
| Load Capacity | High | Low | Normal | High |
| Sevice Life | High | High | Normal | Normal |
| Relative Cost factor | 1.5 | 3 | 1 | 3.5 |
| Production of contamination | Normal | V.Low | Normal | High |
| Modification of metal finish | High | V.Low | Normal | High |
| Chemical resistance | Normal | V.High | Normal | Normal |

Table 2 shows a summary of recommended uses.

| Type | Recommended Uses |
|-------|---|
| BGF | Applications requiring high bearing capacity and long service life. |
| BT/CT | All applications utilising PTFE based seals. Applications requiring smooth low friction operation. Applications with poor lubrication, or high speeds. Type CT should be used for pneumatic applications or for non-ferrous metals. |
| EBR | Standard applications requiring a low cost but efficient bearing. |
| PBR | Applications requiring high bearing capacity at high temperatures, or where the 'dieseling effect' (ignition of vapour) may take place. |

To calculate the maximum allowable bearing load in Newtons for a Claron bearing ring used in standard hydraulic cylinder applications, multiply the projected area by the load capacity as follows:-

1) To calculate the projected area multiply the ID of the bearing by its width:-

$$\text{Projected area} = ID(mm) \times W(mm)$$


2) Multiply the projected area by the load capacity taken from figure 2 for the required maximum operating temperature.

$$\text{Bearing Load} = \text{Projected Area} \times \text{Load capacity}$$


Calculation of maximum allowable bearing Load

Note:

Figure 1 shows that the load distribution is not even along the projected area, this however has already been taken into account in the calculation of load capacity in figure 2.

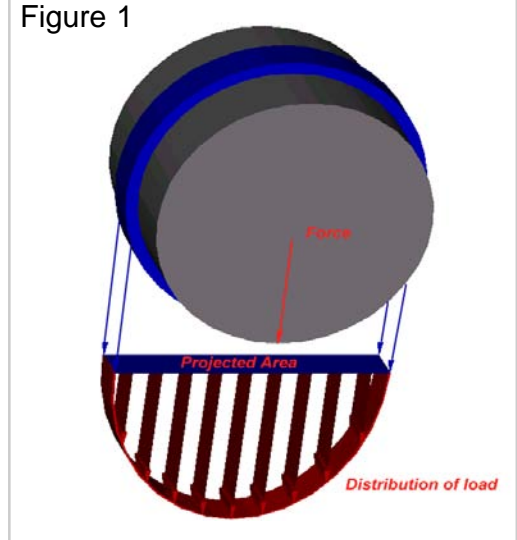

Lubricated applications.
Load Capacity as a function of Temperature

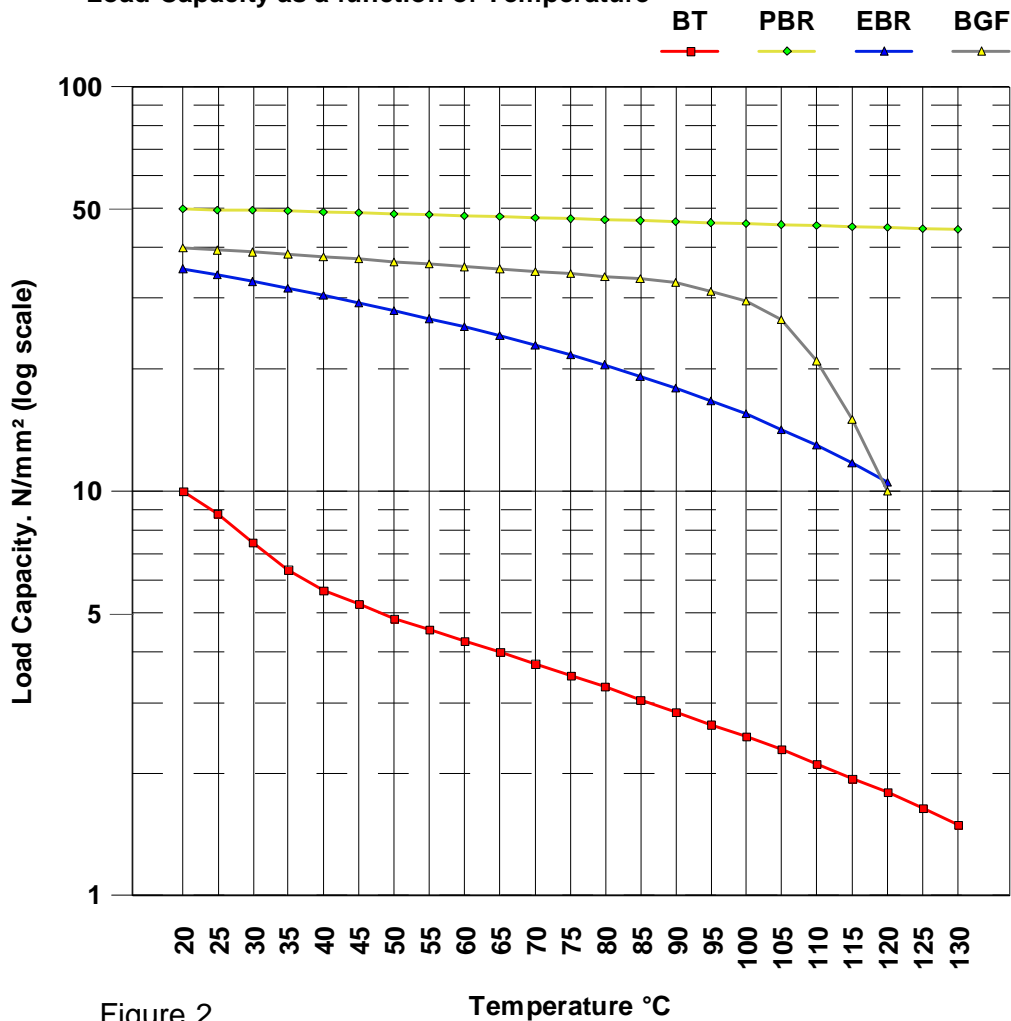

For unlubricated applications Claron recommends the use of Carbon bearing tape CT. See section E2

Design

Claron EBR & IBR bearing rings are designed for use on Pistons or Rods to align Rod and Piston and to prevent metal to metal contact. This bearing is precision moulded from a high performance grade of Polyacetal. These bearing rings are Butt split to facilitate assembly, and to allow the passage of fluid. See the 'selection of bearing rings' at the beginning of this section for further application details.

Operating Conditions

| | |
|----------------------|---------|
| Max. Operating Temp | 110°C |
| Max. Linear Velocity | 1 m/sec |


See graph at the beginning of this section for load capacity values

Continuos operating temperature for various fluids

| POM Polyacetal | | |
|----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | 80 |
| HFD S | Chlorinated hydrocarbon based | 80 |
| HFD T | Mixtures of HFD R and HFD S | 80 |
| HEPG | Polyglycol based | 100 |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 100 |

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

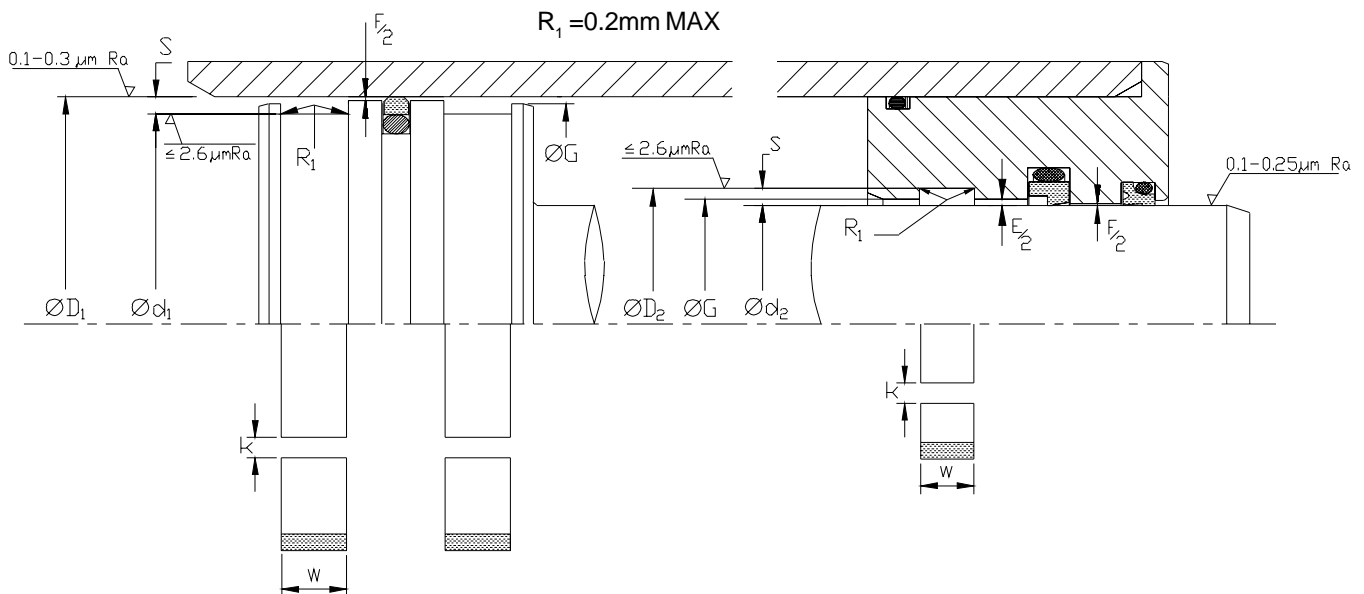

Fitting

For the bearing to function correctly, it is important that care be taken in fitting the bearing within its housing. For a detailed checklist, refer to Appendix 3.

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | $\leq 100\text{mm} +0.0-0.05$ $>100\text{mm} +0.0-0.08$ | ± 0.20 | ± 0.40 |
|-----------------------|---------------|--|------------|-------------|
| | ØD_1 | Ød_1 | L_1 | ØG |
| EBR 25 | 25 | 19 | 10.0 | 22 |
| EBR 32 | 32 | 26 | 10.0 | 29 |
| EBR 40 | 40 | 34 | 10.0 | 37 |
| EBR 46 | 46 | 40 | 10.0 | 43 |
| EBR 50 | 50 | 44 | 10.0 | 47 |
| EBR 50/1 | 50 | 44 | 13.0 | 47 |
| EBR 55 | 55 | 49 | 13.0 | 52 |
| EBR 60 | 60 | 54 | 13.0 | 57 |
| EBR 63 | 63 | 57 | 13.0 | 60 |
| EBR 65 | 65 | 59 | 13.0 | 62 |
| EBR 70 | 70 | 64 | 13.0 | 67 |
| EBR 75 | 75 | 69 | 13.0 | 72 |
| EBR 80 | 80 | 74 | 13.0 | 77 |
| EBR 90 | 90 | 84 | 13.0 | 87 |
| EBR 100 | 100 | 94 | 13.0 | 97 |
| EBR 110 | 110 | 104 | 13.0 | 107 |
| EBR 115 | 115 | 109 | 13.0 | 112 |
| EBR 120 | 120 | 114 | 13.0 | 117 |
| EBR 120/1 | 120 | 114 | 19.5 | 117 |
| EBR 125 | 125 | 119 | 13.0 | 122 |
| EBR 125/1 | 125 | 119 | 19.5 | 122 |
| EBR 127 | 127 | 121 | 13.0 | 124 |
| EBR 130 | 130 | 124 | 13.0 | 127 |
| EBR 140 | 140 | 134 | 13.0 | 137 |
| EBR 150 | 150 | 144 | 13.0 | 147 |
| EBR 150/1 | 150 | 144 | 19.5 | 147 |
| EBR 160 | 160 | 154 | 19.5 | 157 |
| EBR 170 | 170 | 164 | 19.5 | 167 |
| EBR 180 | 180 | 174 | 19.5 | 177 |
| EBR 200 | 200 | 194 | 19.5 | 197 |
| EBR 220 | 220 | 214 | 19.5 | 217 |
| EBR 250 | 250 | 244 | 19.5 | 247 |

ClaronPolyseal®
Piston Bearing Rings

EBR

Imperial

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | $\leq 4.000'' + 0.000'' - 0.002''$ $> 4.000'' + 0.000'' - 0.003''$ | ± 0.004 | ± 0.010 |
|-----------------------|-------------------|---|-------------|-----------------|
| | $\varnothing d_1$ | $\varnothing D_1$ | L_1 | $\varnothing G$ |
| EBR 1000 | 1.000 | 0.764 | 0.393 | 0.882 |
| EBR 1250 | 1.250 | 1.014 | 0.393 | 1.132 |
| EBR 1500 | 1.500 | 1.264 | 0.393 | 1.382 |
| EBR 1750 | 1.750 | 1.514 | 0.393 | 1.632 |
| EBR 2000 | 2.000 | 1.764 | 0.393 | 1.882 |
| EBR 2001/1 | 2.000 | 1.764 | 0.512 | 1.882 |
| EBR 2250 | 2.250 | 2.014 | 0.512 | 2.132 |
| EBR 2500 | 2.500 | 2.264 | 0.512 | 2.382 |
| EBR 2625 | 2.625 | 2.389 | 0.512 | 2.507 |
| EBR 2750 | 2.750 | 2.514 | 0.512 | 2.632 |
| EBR 3000 | 3.000 | 2.764 | 0.512 | 2.882 |
| EBR 3250 | 3.250 | 3.014 | 0.512 | 3.132 |
| EBR 3500 | 3.500 | 3.264 | 0.512 | 3.382 |
| EBR 3750 | 3.750 | 3.514 | 0.512 | 3.632 |
| EBR 4000 | 4.000 | 3.764 | 0.512 | 3.882 |
| EBR 4500 | 4.500 | 4.264 | 0.512 | 4.382 |
| EBR 4500/1 | 4.500 | 4.264 | 0.768 | 4.382 |
| EBR 5000 | 5.000 | 4.764 | 0.512 | 4.882 |
| EBR 5500 | 5.500 | 5.264 | 0.512 | 5.382 |
| EBR 6000 | 6.000 | 5.764 | 0.512 | 5.882 |
| EBR 6500 | 6.500 | 6.264 | 0.768 | 6.382 |
| EBR 7000 | 7.000 | 6.764 | 0.768 | 6.882 |
| EBR 7250 | 7.250 | 7.014 | 0.768 | 7.132 |
| EBR 7500 | 7.500 | 7.264 | 0.768 | 7.382 |
| EBR 8000 | 8.000 | 7.764 | 0.768 | 7.882 |
| EBR 8250/1 | 8.250 | 8.014 | 0.512 | 8.132 |
| EBR 8500 | 8.500 | 8.264 | 0.768 | 8.382 |
| EBR 9000 | 9.000 | 8.764 | 0.768 | 8.882 |
| EBR 9500 | 9.500 | 9.264 | 0.768 | 9.382 |


IBR

Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | $\leq 115\text{mm} +0.05-0.00$ $> 115\text{mm} +0.08-0.00$ | ± 0.20 | ± 0.40 |
|-----------------------|---------------|---|------------|-------------|
| | $\text{Ø}d_2$ | $\text{Ø}D_2$ | L_1 | $\text{Ø}G$ |
| IBR 020 | 20 | 26 | 10.0 | 23 |
| IBR 022 | 22 | 28 | 10.0 | 25 |
| IBR 025 | 25 | 31 | 10.0 | 28 |
| IBR 028 | 28 | 34 | 10.0 | 31 |
| IBR 032 | 32 | 38 | 10.0 | 35 |
| IBR 036 | 36 | 42 | 10.0 | 39 |
| IBR 040 | 40 | 46 | 10.0 | 43 |
| IBR 045 | 45 | 51 | 13.0 | 48 |
| IBR 045/2 | 45 | 51 | 10.0 | 48 |
| IBR 050 | 50 | 56 | 13.0 | 53 |
| IBR 056 | 56 | 62 | 13.0 | 59 |
| IBR 060 | 60 | 66 | 13.0 | 63 |
| IBR 063 | 63 | 69 | 13.0 | 66 |
| IBR 070 | 70 | 76 | 13.0 | 73 |
| IBR 075 | 75 | 81 | 13.0 | 78 |
| IBR 080 | 80 | 86 | 13.0 | 83 |
| IBR 090 | 90 | 96 | 13.0 | 93 |
| IBR 095 | 95 | 101 | 13.0 | 98 |
| IBR 100 | 100 | 106 | 13.0 | 103 |
| IBR 100/1 | 100 | 106 | 20.5 | 103 |
| IBR 110 | 110 | 116 | 13.0 | 113 |
| IBR 120 | 120 | 126 | 13.0 | 123 |
| IBR 125 | 125 | 131 | 13.0 | 128 |
| IBR 125/1 | 125 | 131 | 25.5 | 128 |
| IBR 130 | 130 | 136 | 13.0 | 133 |
| IBR 140 | 140 | 146 | 13.0 | 143 |
| IBR 145 | 145 | 151 | 13.0 | 148 |



ClaronPolyseal®
Rod Bearing Rings
IBR Imperial



Nominal Dimensions & Machining Tolerances

| Claron Part Number | f8 | $\leq 4.500'' + 0.002'' - 0.000''$ $> 4.500'' + 0.002'' - 0.000''$ | ± 0.004 | ± 0.010 |
|-----------------------|-------------------|---|-------------|-----------------|
| | $\varnothing d_2$ | $\varnothing D_2$ | L_1 | $\varnothing G$ |
| IBR 1000 | 1.000 | 1.236 | 0.393 | 1.118 |
| IBR 1125 | 1.125 | 1.361 | 0.393 | 1.243 |
| IBR 1250 | 1.250 | 1.486 | 0.393 | 1.368 |
| IBR 1375 | 1.375 | 1.611 | 0.393 | 1.493 |
| IBR 1500 | 1.500 | 1.736 | 0.393 | 1.618 |
| IBR 1750 | 1.750 | 1.986 | 0.393 | 1.868 |
| IBR 1750/1 | 1.750 | 1.986 | 0.512 | 1.868 |
| IBR 2000 | 2.000 | 2.236 | 0.512 | 2.118 |
| IBR 2125/1 | 2.125 | 2.361 | 0.512 | 2.243 |
| IBR 2250 | 2.250 | 2.486 | 0.512 | 2.368 |
| IBR 2375 | 2.375 | 2.611 | 0.512 | 2.493 |
| IBR 2500 | 2.500 | 2.736 | 0.512 | 2.618 |
| IBR 2625 | 2.625 | 2.861 | 0.512 | 2.743 |
| IBR 2750 | 2.750 | 2.986 | 0.512 | 2.868 |
| IBR 3000 | 3.000 | 3.236 | 0.512 | 3.118 |
| IBR 3250 | 3.250 | 3.486 | 0.512 | 3.368 |
| IBR 3375 | 3.375 | 3.611 | 0.512 | 3.493 |
| IBR 3500 | 3.500 | 3.736 | 0.512 | 3.618 |
| IBR 3625 | 3.625 | 3.861 | 0.512 | 3.743 |
| IBR 3750 | 3.750 | 3.986 | 0.512 | 3.868 |
| IBR 4000 | 4.000 | 4.236 | 0.512 | 4.118 |
| IBR 4250 | 4.250 | 4.486 | 0.512 | 4.368 |
| IBR 4375 | 4.375 | 4.611 | 0.512 | 4.493 |
| IBR 4500 | 4.500 | 4.736 | 0.512 | 4.618 |
| IBR 4750 | 4.750 | 4.986 | 0.512 | 4.868 |
| IBR 5000 | 5.000 | 5.236 | 0.512 | 5.118 |
| IBR 5500 | 5.500 | 5.736 | 0.512 | 5.618 |
| IBR 5750 | 5.750 | 5.986 | 0.512 | 5.868 |
| IBR 6000 | 6.000 | 6.236 | 0.767 | 6.118 |
| IBR 6750 | 6.750 | 6.986 | 0.767 | 6.868 |



Design

This range of products is designed for use in hydraulic and pneumatic piston and gland applications to minimise the problems of metal to metal contact by inexpensive means. Produced from wear resistant filled grades of PTFE with its known properties of low friction, these products eliminate 'stiction' between moving parts, reduce 'nibbling' of the seal at high pressures due to radial movement and are easily assembled.

Materials

For hydraulic applications we recommend CLARON P.T.F.E. bearing tape with a **Bronze filling**. Style **BT...**
 For pneumatic applications we recommend CLARON P.T.F.E. bearing tape with a **Carbon filling**. Style **CT...**
 Other materials are available and the table in Appendix 2 should be carefully considered.
 Consult CLARON for further advice on alternative materials.


Operating Range

Temp. -60°C to 200°C
 Velocity 15m/sec
 These range parameters are maximum conditional values.
 Refer to "Bearing Selection" page E0-1 and "Bearing Materials" in Appendix 1.

How To Order

Example:

Hydraulic application, section 2mm, width 9.7mm, Bore 100mm,
 Reciprocating application.(R cut): **BT 20097/304/R**

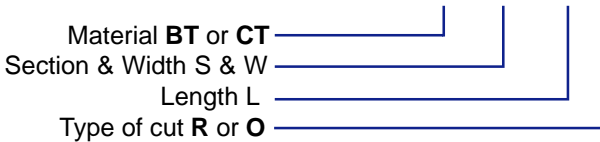


TAPE LENGTH 'L'

(For Temperatures upto 120°C)

Piston Application (mm)
 $L = \pi(0.99\phi D_1 - S) - 1$


Rod Application (mm)
 $L = \pi(0.99\phi d_2 + S) - 1$




For rolls of tape, quote length required and material / size code. e.g. 15m **BT 25097**

TYPE OF CUT

Reciprocating Application Suffix **R**



Rotary or Oscillating Application Suffix **O**



TAPE WIDTH 'W'


In new designs, the choice of tape width 'W' is determined by formula based upon load, diameter and material capability under the given operating conditions.

Note:

Refer also to "Bearing Selection" page E0-1.

Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

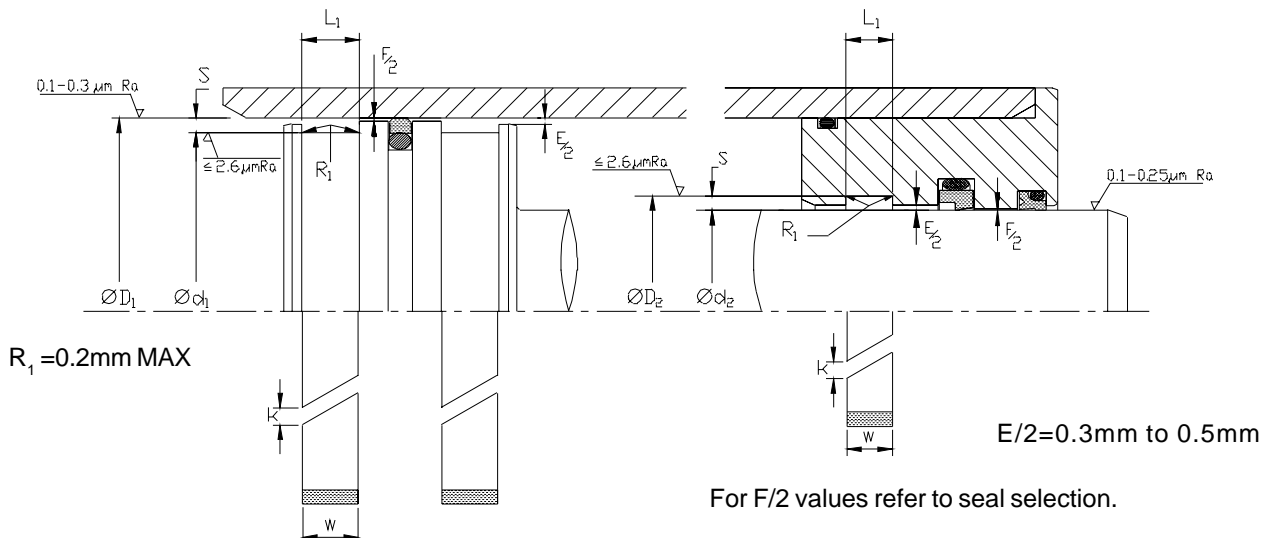

Bearing Material

Claron P.T.F.E. Bearing Tape is specifically designed for use with P.T.F.E. Composite Seals. The nature of P.T.F.E. allows for a manufactured size giving a tighter fit than 'harder' materials such as Phosphor-Bronze, Meehanite or Polyester Fabric. This reduction in radial clearance gives a marginal improvement to the pressure capability of the seal but, more importantly, protects the seal from contaminant particles within the system. A combination of the design of the bearing and the characteristics of P.T.F.E. allow the particles to become embedded in the P.T.F.E. on the non-working face, thus also protecting the steel counterface from scoring. During use, bearing materials wear, causing debris and contamination of the fluid. Extensive tests have shown that particulate contamination >15µm within the fluid, increases with the use of Phosphor-Bronze or Meehanite, and tends to decrease with the use of P.T.F.E. The harder debris created

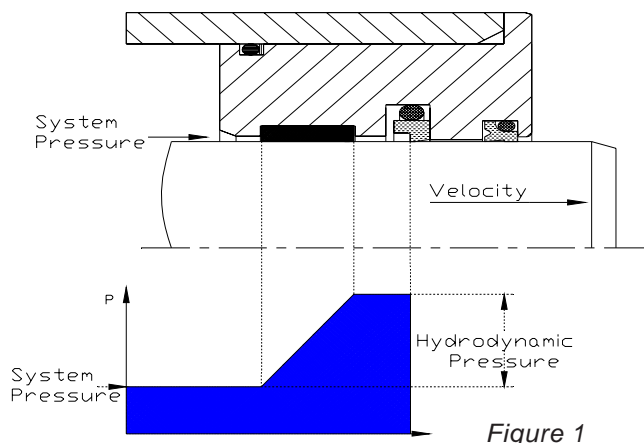


Figure 1

by these bearings also has a greater effect upon seal performance. Particulate contamination in the fluid surrounding the seal can be over 100 times that in the main system due to the bearing preventing flushing of the seal space. Increased contamination in this area will increase the probability of a large enough particle gaining access to the seal interface, causing damage and leakage. **Claron P.T.F.E. Bearing Tape** is designed to allow pressure relief to the seal by use of the expansion gap (k). This avoids the possibility of a pressure lock between the seal and the bearing, as well as eliminating the possibility of Hydrodynamic pressure build-up (shown in Figure 1) causing premature destruction of the seal.

This relief also avoids the presence of excess pressure during the return stroke which can prevent the transfer of the fluid film back to the pressure side of the seal, so creating the effect of a leaking seal. Pressure relief should be incorporated within the design of continuous bearings, particularly for fast cycling applications. The advantages of **Claron P.T.F.E. Bearing Tape** are not restricted to **Composite Seals** but apply to Nitrile and Polyurethane Seals.

Consideration of Radial Load

The maximum radial load applied to the bearings will determine both the width 'W' of the tape and number of bearings to be used. This can be calculated based on the radial force and the maximum permissible load capacity of the material at a given temperature. In the case of either lubricated dynamic, or unlubricated static applications **BRONZE filled P.T.F.E.** tape should be used and the value of 'P' should be taken from graph 1 shown below.

In the case of unlubricated Dynamic applications, friction has a much greater effect on the material which reduces the permissible load capacity of the material as the velocity increases. Therefore to allow for the effect of velocity, the load capacity P taken from graph 1 for **CARBON filled P.T.F.E.** should be reduced by multiplying it by a factor f taken from graph 2.

Lubricated Dynamic Conditions

$$W = \frac{F \max}{P \times n \times d}$$

Where:-

W=Minimum Required Tape Width (mm)

n=Number of Bearings

F=Maximum Radial Force (Kp)



d=Inside diameter of tape(mm)

P=Permissible load capacity N/mm²)

f=Reduction Factor



Unlubricated Dynamic Conditions

$$W = \frac{F \max}{P \times f \times n \times d}$$

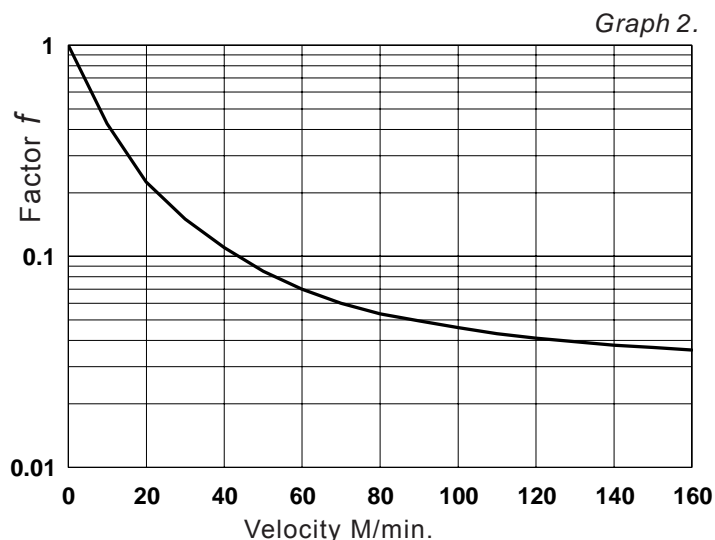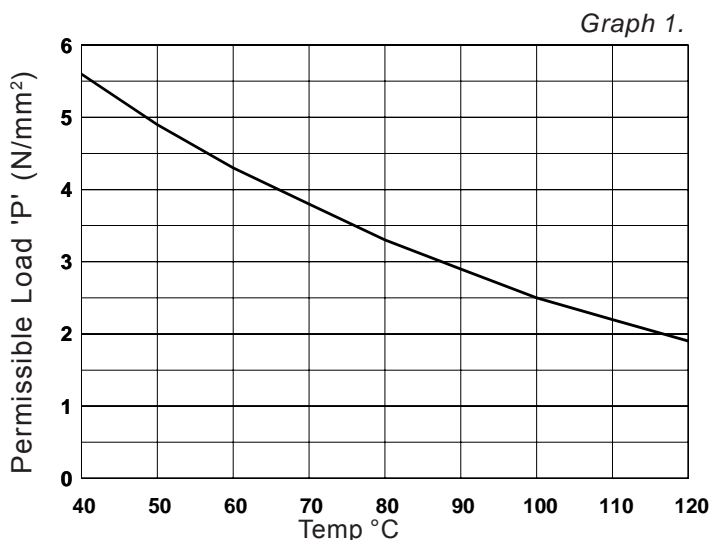

Nominal Dimensions & Machining Tolerances

| Claron Part Number Prefix BT CT | S | W MAX | Min Ø Ød1 | Min Ø ØD2 | ≤100mm +0.00 -0.05 | ≤115mm +0.05 -0.00 | +0.20 |
|---------------------------------------|-----|----------|--------------|--------------|---------------------|---------------------|----------------|
| | | | | | >100mm +0.00 -0.08 | >115mm +0.08 -0.00 | -0.00 |
| | | | | | Ød ₁ | ØD ₂ | L ₁ |
| 15032 | 1.5 | 3.0 | 10 | 10 | D ₁ -3.0 | d ₂ +3.0 | 3.2 |
| 15063 | 1.5 | 6.1 | 15 | 10 | D ₁ -3.0 | d ₂ +3.0 | 6.3 |
| 15097 | 1.5 | 9.5 | 30 | 25 | D ₁ -3.0 | d ₂ +3.0 | 9.7 |
| 15150 | 1.5 | 14.8 | 45 | 35 | D ₁ -3.0 | d ₂ +3.0 | 15.0 |
| 15200 | 1.5 | 19.5 | 50 | 40 | D ₁ -3.0 | d ₂ +3.0 | 20.0 |
| 15250 | 1.5 | 24.5 | 100 | 80 | D ₁ -3.0 | d ₂ +3.0 | 25.0 |
| 15300 | 1.5 | 29.5 | 110 | 110 | D ₁ -3.0 | d ₂ +3.0 | 30.0 |
| 15400 | 1.5 | 39.5 | 110 | 110 | D ₁ -3.0 | d ₂ +3.0 | 40.0 |
| 20063 | 2.0 | 6.1 | 20 | 15 | D ₁ -4.0 | d ₂ +4.0 | 6.3 |
| 20081 | 2.0 | 7.9 | 30 | 25 | D ₁ -4.0 | d ₂ +4.0 | 8.1 |
| 20097 | 2.0 | 9.5 | 35 | 30 | D ₁ -4.0 | d ₂ +4.0 | 9.7 |
| 20100 | 2.0 | 9.8 | 35 | 30 | D ₁ -4.0 | d ₂ +4.0 | 10.0 |
| 20150 | 2.0 | 14.8 | 50 | 40 | D ₁ -4.0 | d ₂ +4.0 | 15.0 |
| 20200 | 2.0 | 19.5 | 75 | 60 | D ₁ -4.0 | d ₂ +4.0 | 20.0 |
| 20250 | 2.0 | 24.5 | 120 | 100 | D ₁ -4.0 | d ₂ +4.0 | 25.0 |
| 20300 | 2.0 | 29.5 | 130 | 130 | D ₁ -4.0 | d ₂ +4.0 | 30.0 |
| 20350 | 2.0 | 34.5 | 150 | 150 | D ₁ -4.0 | d ₂ +4.0 | 35.0 |
| 25056 | 2.5 | 5.4 | 25 | 20 | D ₁ -5.0 | d ₂ +5.0 | 5.6 |
| 25063 | 2.5 | 6.1 | 25 | 20 | D ₁ -5.0 | d ₂ +5.0 | 6.3 |
| 25081 | 2.5 | 7.9 | 35 | 30 | D ₁ -5.0 | d ₂ +5.0 | 8.1 |
| 25097 | 2.5 | 9.5 | 40 | 35 | D ₁ -5.0 | d ₂ +5.0 | 9.7 |
| 25100 | 2.5 | 9.8 | 40 | 35 | D ₁ -5.0 | d ₂ +5.0 | 10.0 |
| 25150 | 2.5 | 14.8 | 60 | 50 | D ₁ -5.0 | d ₂ +5.0 | 15.0 |
| 25200 | 2.5 | 19.5 | 90 | 75 | D ₁ -5.0 | d ₂ +5.0 | 20.0 |
| 25250 | 2.5 | 24.5 | 140 | 120 | D ₁ -5.0 | d ₂ +5.0 | 25.0 |
| 25300 | 2.5 | 29.5 | 150 | 150 | D ₁ -5.0 | d ₂ +5.0 | 30.0 |
| 30063 | 3.0 | 6.1 | 30 | 25 | D ₁ -6.0 | d ₂ +6.0 | 6.3 |
| 30081 | 3.0 | 7.9 | 45 | 40 | D ₁ -6.0 | d ₂ +6.0 | 8.1 |
| 30097 | 3.0 | 9.5 | 45 | 40 | D ₁ -6.0 | d ₂ +6.0 | 9.7 |
| 30100 | 3.0 | 9.8 | 45 | 40 | D ₁ -6.0 | d ₂ +6.0 | 10.0 |
| 30127 | 3.0 | 12.5 | 70 | 60 | D ₁ -6.0 | d ₂ +6.0 | 12.7 |
| 30150 | 3.0 | 14.8 | 70 | 60 | D ₁ -6.0 | d ₂ +6.0 | 15.0 |
| 30200 | 3.0 | 19.5 | 120 | 100 | D ₁ -6.0 | d ₂ +6.0 | 20.0 |
| 30250 | 3.0 | 24.5 | 160 | 140 | D ₁ -6.0 | d ₂ +6.0 | 25.0 |
| 30300 | 3.0 | 29.5 | 170 | 170 | D ₁ -6.0 | d ₂ +6.0 | 30.0 |
| 32056 | 3.2 | 5.4 | 35 | 30 | D ₁ -6.4 | d ₂ +6.4 | 5.6 |
| 32127 | 3.2 | 12.5 | 70 | 60 | D ₁ -6.4 | d ₂ +6.4 | 12.7 |
| 32190 | 3.2 | 18.8 | 120 | 100 | D ₁ -6.4 | d ₂ +6.4 | 19.0 |
| 32254 | 3.2 | 24.9 | 160 | 140 | D ₁ -6.4 | d ₂ +6.4 | 25.4 |
| 40063 | 4.0 | 6.1 | 45 | 35 | D ₁ -8.0 | d ₂ +8.0 | 6.3 |
| 40081 | 4.0 | 7.9 | 50 | 40 | D ₁ -8.0 | d ₂ +8.0 | 8.1 |
| 40097 | 4.0 | 9.5 | 60 | 50 | D ₁ -8.0 | d ₂ +8.0 | 9.7 |
| 40150 | 4.0 | 14.8 | 80 | 70 | D ₁ -8.0 | d ₂ +8.0 | 15.0 |
| 40200 | 4.0 | 19.5 | 130 | 110 | D ₁ -8.0 | d ₂ +8.0 | 20.0 |
| 40250 | 4.0 | 24.5 | 180 | 160 | D ₁ -8.0 | d ₂ +8.0 | 25.0 |



Design

Claron BGF bearing rings are designed for use on pistons or rods to align rod and piston and to prevent metal to metal contact. This bearing is precision moulded from a reinforced and heat stabilised grade of Nylon. The reinforcing fibres allows a higher than normal load capability and life span for this type of material. All Claron bearing rings are split to facilitate assembly, and to allow the passing of fluid. See the 'selection of bearing rings' at the beginning of this section for further application details.

Operating Conditions

| | |
|----------------------|-----------|
| Max. Operating Temp | 110°C |
| Max. Linear Velocity | 1.5 m/sec |

Continuous operating temperature for various fluids

| PA Nylon | | |
|----------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 120 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 120 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 120 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 120 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 120 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 55 |
| HFA S | Synthetic oil in water. Water content 80-95% | 55 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 60 |
| HFC | Aqueous polymer solutions. Water content 35% | 60 |
| HFD R | Phosphoric acid ester based | 80 |
| HFD S | Chlorinated hydrocarbon based | 80 |
| HFD T | Mixtures of HFD R and HFD S | 80 |
| HEPG | Polyglycol based | 100 |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 100 |

See graph at the beginning of this section for load capacity values

How To Order

Order using the part number shown followed by a suffix denoting the type of cut required:-


| Type | Suffix |
|--------------|---|
| Straight cut | /O |
| Angle cut | /R60 (where the number represents the angle required) |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the bearing to function correctly, it is important that care be taken in fitting the bearing within its housing. For a detailed checklist, refer to Appendix 3.

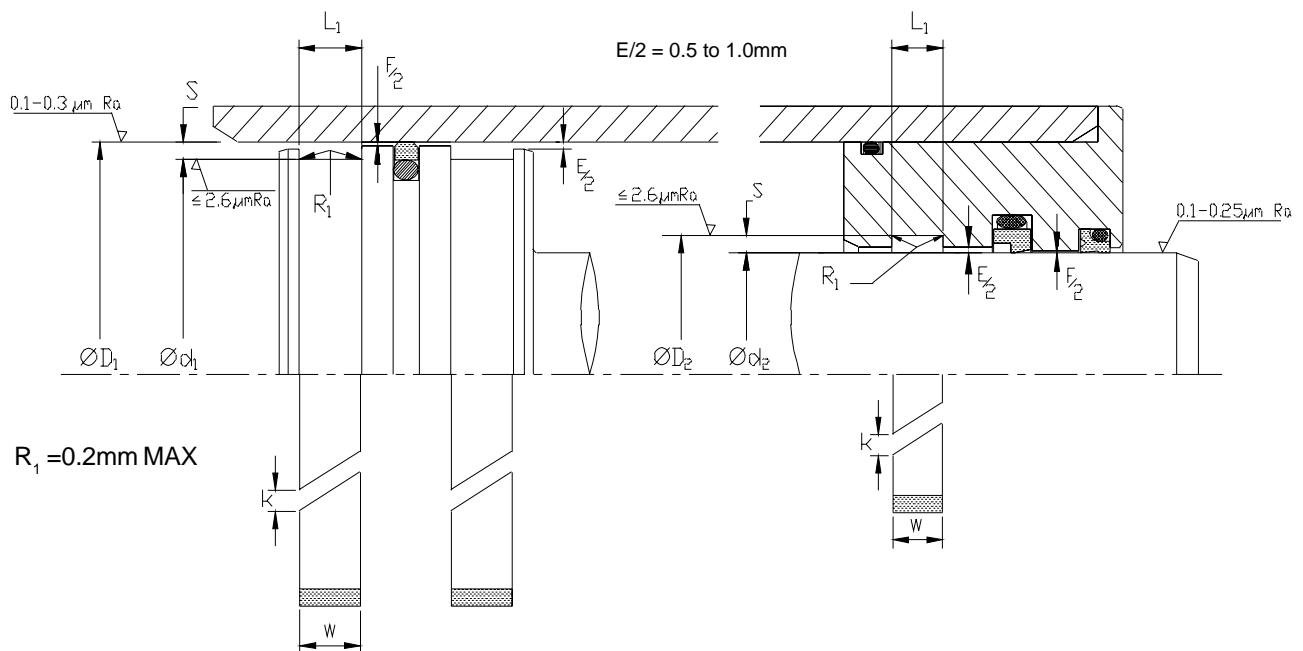



Claron Polyseal®
Piston & Rod Bearing Rings




BGF

Metric

Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | $\leq 115\text{mm}$ +0.05 -0.00 | $\leq 100\text{mm}$ +0.00 -0.05 | f8 | +0.20 | E |
|-----------------------|---------------|--|--|---------------|----------------|---|
| | ØD_1 | $> 115\text{mm}$ +0.08 -0.00 ØD_2 | $> 100\text{mm}$ +0.00 -0.08 Ød_1 | Ød_2 | -0.00 L_1 | |
| BGF 032028960/ | 32.0 | | 28.0 | | 9.6 | |
| BGF 044040300/ | 44.0 | | 40.0 | | 30.0 | |
| BGF 050044090/ | 50.0 | | 44.0 | | 9.0 | |
| BGF 055040010/ | 55.0 | | 40.0 | | 10.0 | |
| BGF 055049125/ | 55.0 | | 49.0 | | 12.5 | |
| BGF 062057198/ | 62.18 | | 57.18 | | 19.8 | |
| BGF 063058055/ | 63.0 | | 58.0 | | 5.5 | |
| BGF 065050010/ | 65.0 | | 50.0 | | 10.0 | |
| BGF 065061080/ | 65.0 | | 61.0 | | 8.0 | |
| BGF 065061100/ | 65.0 | | 61.0 | | 10.0 | |
| BGF 068064100/ | 68.0 | | 64.0 | | 10.0 | |
| BGF 070065070/ | 70.0 | | 65.0 | | 7.0 | |
| BGF 070065205/ | 70.0 | | 65.0 | | 20.5 | |
| BGF 071066055/ | 71.0 | | 66.0 | | 5.5 | |
| BGF 075060010/ | 75.0 | | 60.0 | | 10.0 | |
| BGF 075070057/ | 75.0 | | 70.0 | | 5.7 | |
| BGF 075071100/ | 75.0 | | 71.0 | | 10.0 | |
| BGF 080074097/ | 80.0 | | 74.0 | | 9.7 | |
| BGF 080075097/ | 80.0 | | 75.0 | | 9.7 | |
| BGF 080076100/ | 80.0 | | 76.0 | | 10.0 | |
| BGF 085081100/ | 85.0 | | 81.0 | | 10.0 | |
| BGF 090085097/ | 90.0 | | 85.0 | | 9.7 | |
| BGF 094089198/ | 93.9 | | 88.9 | | 19.8 | |
| BGF 100095150/ | 100.0 | | 95.0 | | 15.0 | |
| BGF 105101150/ | 105.0 | | 101.0 | | 15.0 | |
| BGF 110105150/ | 110.0 | | 105.0 | | 15.0 | |
| BGF 115111150/ | 115.0 | | 111.0 | | 15.0 | |
| BGF 120116150/ | 120.0 | | 116.0 | | 15.0 | |
| BGF 130125150/ | 130.0 | | 125.0 | | 15.0 | |

1.0 to 2.0



PBR

Design

Claron PBR bearing rings are designed for use on pistons or rods to align rod and piston and to prevent metal to metal contact. This bearing is precision machined from a reinforced grade of Phenolic resin. The thermoset properties of this material allows a high load capability even at higher temperatures. All Claron bearing rings are split to facilitate assembly, and to allow the passage of fluid.

See the 'selection of bearing rings' at the beginning of this section for further application details.

Operating Conditions

| | |
|-------------------------------------|--------|
| Max. Operating Temp. (Intermittent) | 150°C |
| Max. Operating Temp. (Continuous) | 120°C |
| Max. Linear Velocity | 3m/sec |

See graph at the beginning of this section for load capacity values

How To Order

Order using the part number shown followed by a suffix denoting the type of cut required:-

| Type | Suffix |
|--------------|---|
| Straight cut | /O |
| Angle cut | /R60 (where the number represents the angle required) |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.

Refer to Appendix 4 for value of tolerance symbols.

Fitting

For the bearing to function correctly, it is important that care be taken in fitting the bearing within its housing. For a detailed checklist, refer to Appendix 3.

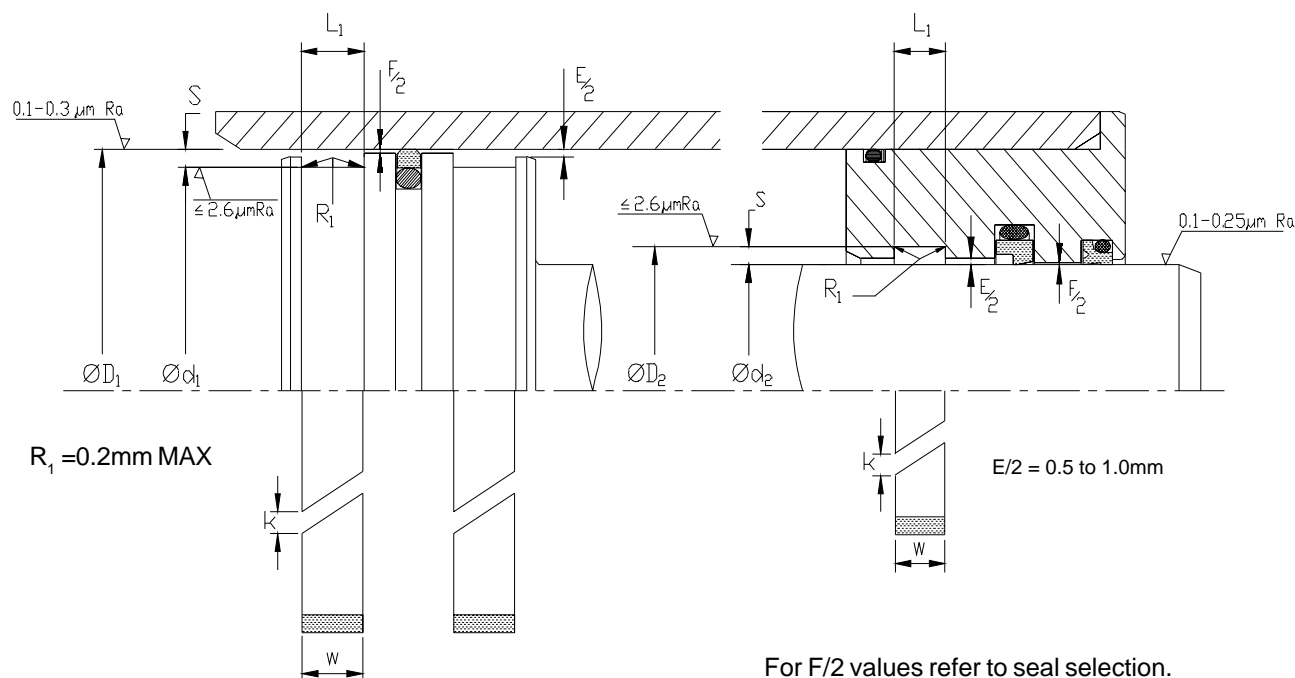

Claron[®] Polyseal[®]
Piston & Rod Bearing Rings

PBR

Metric

Nominal Dimensions & Machining Tolerances


| Claron Part Number | H9 | $\leq 115\text{mm}$ +0.05 -0.00 >115mm +0.08 -0.00 | $\leq 100\text{mm}$ +0.00 -0.05 >100mm +0.00 -0.08 | f8 | +0.20 -0.00 | Nom. Sec. | E |
|-----------------------|-------------------|---|---|-------------------|----------------|-------------|---|
| | $\varnothing D_1$ | $\varnothing D_2$ | $\varnothing d_1$ | $\varnothing d_2$ | L_1 | S | |
| PBR 016011056 | 16 | | 11.0 | | 5.6 | 2.5 | |
| PBR 020017040 | 20 | | 16.9 | | 4.0 | 1.55 | |
| PBR 020016080 | 20 | | 16.0 | | 8.0 | 2.0 | |
| PBR 020015056 | 20 | | 15.0 | | 5.6 | 2.5 | |
| PBR 025022040 | 25 | | 21.9 | | 4.0 | 1.55 | |
| PBR 025021080 | 25 | | 21.0 | | 8.0 | 2.0 | |
| PBR 025020056 | 25 | | 20.0 | | 5.6 | 2.5 | |
| PBR 025020097 | 25 | | 20.0 | | 9.7 | 2.5 | |
| PBR 030027040 | 30 | | 26.9 | | 4.0 | 1.55 | |
| PBR 030026080 | 30 | | 26.0 | | 8.0 | 2.0 | |
| PBR 030025056 | 30 | | 25.0 | | 5.6 | 2.5 | |
| PBR 030025097 | 30 | | 25.0 | | 9.7 | 2.5 | |
| PBR 032029040 | 32 | | 28.9 | | 4.0 | 1.55 | |
| PBR 032027056 | 32 | | 27.0 | | 5.6 | 2.5 | |
| PBR 032027097 | 32 | | 27.0 | | 9.7 | 2.5 | |
| PBR 035032040 | 35 | | 31.9 | | 4.0 | 1.55 | |
| PBR 035031010 | 35 | | 31.0 | | 10.0 | 2.0 | |
| PBR 035030056 | 35 | | 30.0 | | 5.6 | 2.5 | |
| PBR 035030097 | 35 | | 30.0 | | 9.7 | 2.5 | |
| PBR 040037040 | 40 | | 36.9 | | 4.0 | 1.55 | |
| PBR 040036010 | 40 | | 36.0 | | 10.0 | 2.0 | |
| PBR 040035056 | 40 | | 35.0 | | 5.6 | 2.5 | |
| PBR 040035097 | 40 | | 35.0 | | 9.7 | 2.5 | |
| PBR 045042040 | 45 | | 41.9 | | 4.0 | 1.55 | |
| PBR 045040080 | 45 | | 40.0 | | 8.0 | 2.5 | |
| PBR 045040056 | 45 | | 40.0 | | 5.6 | 2.5 | |
| PBR 045040097 | 45 | | 40.0 | | 9.7 | 2.5 | |
| PBR 045040150 | 45 | | 40.0 | | 15.0 | 2.5 | |
| PBR 050047040 | 50 | | 46.9 | | 4.0 | 1.55 | |
| PBR 050045056 | 50 | | 45.0 | | 5.6 | 2.5 | |
| PBR 050045063 | 50 | | 45.0 | | 6.3 | 2.5 | |
| PBR 050045080 | 50 | | 45.0 | | 8.0 | 2.5 | |
| PBR 050045097 | 50 | | 45.0 | | 9.7 | 2.5 | |
| PBR 050045150 | 50 | | 45.0 | | 15.0 | 2.5 | |
| PBR 050044125 | 50 | | 44.0 | | 12.5 | 3.0 | |
| PBR 055050056 | 55 | | 50.0 | | 5.6 | 2.5 | |
| PBR 055050080 | 55 | | 50.0 | | 8.0 | 2.5 | |
| PBR 055050097 | 55 | | 50.0 | | 9.7 | 2.5 | |
| PBR 055050150 | 55 | | 50.0 | | 15.0 | 2.5 | |
| PBR 060055056 | 60 | | 55.0 | | 5.6 | 2.5 | |
| PBR 060055080 | 60 | | 55.0 | | 8.0 | 2.5 | |
| PBR 060055097 | 60 | | 55.0 | | 9.7 | 2.5 | |
| PBR 060055150 | 60 | | 55.0 | | 15.0 | 2.5 | |
| PBR 060054125 | 60 | | 54.0 | | 12.5 | 3.0 | |
| PBR 063058056 | 63 | | 58.0 | | 5.6 | 2.5 | |

1.0 to 2.0

Claron Polyseal®
Piston & Rod Bearing Rings

PBR



Metric



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | $\leq 115\text{mm}$ $+0.05-0.00$ $> 115\text{mm}$ $+0.08-0.00$ | $\leq 100\text{mm}$ $+0.00-0.05$ $> 100\text{mm}$ $+0.00-0.08$ | f8 | $+0.20$ -0.00 | Nom. Sec. | E |
|-----------------------|-------------------|---|---|-------------------|--------------------|------------|---|
| | $\varnothing D_1$ | $\varnothing D_2$ | $\varnothing d_1$ | $\varnothing d_2$ | L_1 | S | |
| PBR 063058063 | 63 | | 58.0 | | 6.3 | 2.5 | |
| PBR 063058097 | 63 | | 58.0 | | 9.7 | 2.5 | |
| PBR 065060056 | 65 | | 60.0 | | 5.6 | 2.5 | |
| PBR 065060097 | 65 | | 60.0 | | 9.7 | 2.5 | |
| PBR 065060100 | 65 | | 60.0 | | 10.0 | 2.5 | |
| PBR 065060150 | 65 | | 60.0 | | 15.0 | 2.5 | |
| PBR 065060200 | 65 | | 60.0 | | 20.0 | 2.5 | |
| PBR 068063063 | 68 | | 63.0 | | 6.3 | 2.5 | |
| PBR 070065056 | 70 | | 65.0 | | 5.6 | 2.5 | |
| PBR 070065097 | 70 | | 65.0 | | 9.7 | 2.5 | |
| PBR 070065010 | 70 | | 65.0 | | 10.0 | 2.5 | |
| PBR 070065150 | 70 | | 65.0 | | 15.0 | 2.5 | |
| PBR 070065200 | 70 | | 65.0 | | 20.0 | 2.5 | |
| PBR 070064125 | 70 | | 64.0 | | 12.5 | 3.0 | |
| PBR 075070056 | 75 | | 70.0 | | 5.6 | 2.5 | |
| PBR 075070063 | 75 | | 70.0 | | 6.3 | 2.5 | |
| PBR 075070097 | 75 | | 70.0 | | 9.7 | 2.5 | |
| PBR 075070100 | 75 | | 70.0 | | 10.0 | 2.5 | |
| PBR 075070150 | 75 | | 70.0 | | 15.0 | 2.5 | |
| PBR 080075056 | 80 | | 75.0 | | 5.6 | 2.5 | |
| PBR 080075097 | 80 | | 75.0 | | 9.7 | 2.5 | |
| PBR 080075100 | 80 | | 75.0 | | 10.0 | 2.5 | |
| PBR 080075100 | 80 | | 75.0 | | 10.0 | 2.5 | |
| PBR 080075150 | 80 | | 75.0 | | 15.0 | 2.5 | |
| PBR 080075200 | 80 | | 75.0 | | 20.0 | 2.5 | |
| PBR 080074125 | 80 | | 74.0 | | 12.5 | 3.0 | |
| PBR 085080056 | 85 | | 80.0 | | 5.6 | 2.5 | |
| PBR 085080063 | 85 | | 80.0 | | 6.3 | 2.5 | |
| PBR 085080097 | 85 | | 80.0 | | 9.7 | 2.5 | |
| PBR 085080150 | 85 | | 80.0 | | 15.0 | 2.5 | |
| PBR 085079150 | 85 | | 79.0 | | 15.0 | 3.0 | |
| PBR 085079250 | 85 | | 79.0 | | 25.0 | 3.0 | |
| PBR 090085056 | 90 | | 85.0 | | 5.6 | 2.5 | |
| PBR 090085097 | 90 | | 85.0 | | 9.7 | 2.5 | |
| PBR 090085150 | 90 | | 85.0 | | 15.0 | 2.5 | |
| PBR 090084125 | 90 | | 84.0 | | 12.5 | 3.0 | |
| PBR 090084150 | 90 | | 84.0 | | 15.0 | 3.0 | |
| PBR 090084250 | 90 | | 84.0 | | 25.0 | 3.0 | |
| PBR 095090056 | 95 | | 90.0 | | 5.6 | 2.5 | |
| PBR 095090097 | 95 | | 90.0 | | 9.7 | 2.5 | |
| PBR 095090150 | 95 | | 90.0 | | 15.0 | 2.5 | |
| PBR 095089150 | 95 | | 89.0 | | 15.0 | 3.0 | |
| PBR 095089250 | 95 | | 89.0 | | 25.0 | 3.0 | |
| PBR 100095056 | 100 | | 95.0 | | 5.6 | 2.5 | |
| PBR 100095097 | 100 | | 95.0 | | 9.7 | 2.5 | |



1.0 to 2.0



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 | ≤115mm +0.05-0.00 >115mm +0.08-0.00 | ≤100mm +0.00-0.05 >100mm +0.00-0.08 | f8 | +0.20 -0.00 | Nom. sec. | E |
|-----------------------|-----------------|--|--|-----------------|----------------|------------|------------|
| | ØD ₁ | ØD ₂ | Ød ₁ | Ød ₂ | L ₁ | S | |
| PBR 100095150 | 100 | | 95.0 | | 15.0 | 2.5 | |
| PBR 100094125 | 100 | | 94.0 | | 12.5 | 3.0 | |
| PBR 100094150 | 100 | | 94.0 | | 15.0 | 3.0 | |
| PBR 100094250 | 100 | | 94.0 | | 25.0 | 3.0 | |
| PBR 105100056 | 105 | | 100.0 | | 5.6 | 2.5 | |
| PBR 105100097 | 105 | | 100.0 | | 9.7 | 2.5 | |
| PBR 105100150 | 105 | | 100.0 | | 15.0 | 2.5 | |
| PBR 105099250 | 105 | | 99.0 | | 25.0 | 3.0 | |
| PBR 110105056 | 110 | | 105.0 | | 5.6 | 2.5 | |
| PBR 110105097 | 110 | | 105.0 | | 9.7 | 2.5 | |
| PBR 110105150 | 110 | | 105.0 | | 15.0 | 2.5 | |
| PBR 110104125 | 110 | | 104.0 | | 12.5 | 3.0 | |
| PBR 110104150 | 110 | | 104.0 | | 15.0 | 3.0 | |
| PBR 110104250 | 110 | | 104.0 | | 25.0 | 3.0 | |
| PBR 115110056 | 115 | | 110.0 | | 5.6 | 2.5 | |
| PBR 115110097 | 115 | | 110.0 | | 9.7 | 2.5 | |
| PBR 115110150 | 115 | | 110.0 | | 15.0 | 2.5 | |
| PBR 115109300 | 115 | | 109.0 | | 30.0 | 3.0 | 1.0 to 2.0 |
| PBR 115109300 | 115 | | 109.0 | | 30.0 | 3.0 | 1.0 to 2.0 |
| PBR 12015056 | 120 | | 115.0 | | 5.6 | 2.5 | |
| PBR 120115097 | 120 | | 115.0 | | 9.7 | 2.5 | |
| PBR 12015150 | 120 | | 115.0 | | 15.0 | 2.5 | |
| PBR 120114125 | 120 | | 114.0 | | 12.5 | 3.0 | |
| PBR 120114150 | 120 | | 114.0 | | 15.0 | 3.0 | |
| PBR 120114300 | 120 | | 114.0 | | 30.0 | 3.0 | |
| PBR 125120056 | 125 | | 120.0 | | 5.6 | 2.5 | |
| PBR 125120097 | 125 | | 120.0 | | 9.7 | 2.5 | |
| PBR 125120150 | 125 | | 120.0 | | 15.0 | 2.5 | |
| PBR 125119150 | 125 | | 119.0 | | 15.0 | 3.0 | |
| PBR 125119300 | 125 | | 119.0 | | 30.0 | 3.0 | |
| PBR 130125097 | 130 | | 125.0 | | 9.7 | 2.5 | |
| PBR 130125150 | 130 | | 125.0 | | 15.0 | 2.5 | |
| PBR 130124125 | 130 | | 124.0 | | 12.5 | 3.0 | |
| PBR 130123150 | 130 | | 123.0 | | 15.0 | 3.5 | |
| PBR 130123300 | 130 | | 123.0 | | 30.0 | 3.5 | |
| PBR 135130097 | 135 | | 130.0 | | 9.7 | 2.5 | |
| PBR 135130150 | 135 | | 130.0 | | 15.0 | 2.5 | |
| PBR 140135097 | 140 | | 135.0 | | 9.7 | 2.5 | |
| PBR 140135150 | 140 | | 135.0 | | 15.0 | 2.5 | |
| PBR 140132080 | 140 | | 132.0 | | 8.0 | 4.0 | |
| PBR 140133200 | 140 | | 133.0 | | 20.0 | 3.5 | |
| PBR 140133350 | 140 | | 133.0 | | 35.0 | 3.5 | |
| PBR 150145097 | 150 | | 145.0 | | 9.7 | 2.5 | |
| PBR 150145150 | 150 | | 145.0 | | 15.0 | 2.5 | |
| PBR 150143200 | 150 | | 143.0 | | 20.0 | 3.5 | |




| Claron Part Number | Nominal Dimensions & Machining Tolerances | | | | | Nom. Sec. | E |
|----------------------|---|---|---|-----------------------|----------------------------------|------------|------------|
| | H9 ØD ₁ | ≤115mm +0.05-0.00 >115mm +0.08-0.00 ØD ₂ | ≤100mm +0.00-0.05 >100mm +0.00-0.08 Ød ₁ | f8 Ød ₂ | +0.20 -0.00 L ₁ | | |
| PBR 150143350 | 150 | | 143 | | 35.0 | 3.5 | |
| PBR 160155097 | 160 | | 155 | | 9.7 | 2.5 | |
| PBR 160155150 | 160 | | 155 | | 15.0 | 2.5 | |
| PBR 160153200 | 160 | | 153 | | 20.0 | 3.5 | |
| PBR 160153400 | 160 | | 153 | | 40.0 | 3.5 | |
| PBR 170165097 | 170 | | 165 | | 9.7 | 2.5 | |
| PBR 170165150 | 170 | | 165 | | 15.0 | 2.5 | |
| PBR 170162250 | 170 | | 162 | | 25.0 | 4.0 | |
| PBR 170162450 | 170 | | 162 | | 45.0 | 4.0 | |
| PBR 180175097 | 180 | | 175 | | 9.7 | 2.5 | |
| PBR 180175150 | 180 | | 175 | | 15.0 | 2.5 | |
| PBR 180172250 | 180 | | 172 | | 25.0 | 4.0 | |
| PBR 180172450 | 180 | | 172 | | 45.0 | 4.0 | |
| PBR 190185097 | 190 | | 185 | | 9.7 | 2.5 | |
| PBR 190185150 | 190 | | 185 | | 15.0 | 2.5 | |
| PBR 190182250 | 190 | | 182 | | 25.0 | 4.0 | |
| PBR 190182450 | 190 | | 182 | | 45.0 | 4.0 | |
| PBR 200195097 | 200 | | 195 | | 9.7 | 2.5 | |
| PBR 200195150 | 200 | | 195 | | 15.0 | 2.5 | |
| PBR 200192250 | 200 | | 192 | | 25.0 | 4.0 | |
| PBR 200192450 | 200 | | 192 | | 45.0 | 4.0 | |
| PBR 210205097 | 210 | | 205 | | 9.7 | 2.5 | |
| PBR 210205150 | 210 | | 205 | | 15.0 | 2.5 | 1.0 to 2.0 |
| PBR 210202250 | 210 | | 202 | | 25.0 | 4.0 | |
| PBR 210202500 | 210 | | 202 | | 50.0 | 4.0 | |
| PBR 220215097 | 220 | | 215 | | 9.7 | 2.5 | |
| PBR 220215150 | 220 | | 215 | | 15.0 | 2.5 | |
| PBR 220212500 | 220 | | 212 | | 50.0 | 4.0 | |
| PBR 225217250 | 225 | | 217 | | 25.0 | 4.0 | |
| PBR 230225097 | 230 | | 225 | | 9.7 | 2.5 | |
| PBR 230225150 | 230 | | 225 | | 15.0 | 2.5 | |
| PBR 230225097 | 230 | | 222 | | 30.0 | 4.0 | |
| PBR 230222550 | 230 | | 222 | | 55.0 | 4.0 | |
| PBR 240235097 | 240 | | 235 | | 9.7 | 2.5 | |
| PBR 240235150 | 240 | | 235 | | 15.0 | 2.5 | |
| PBR 240232300 | 240 | | 232 | | 30.0 | 4.0 | |
| PBR 240232550 | 240 | | 232 | | 55.0 | 4.0 | |
| PBR 250245097 | 250 | | 245 | | 9.7 | 2.5 | |
| PBR 250245150 | 250 | | 245 | | 15.0 | 2.5 | |
| PBR 250242300 | 250 | | 242 | | 30.0 | 4.0 | |
| PBR 250242550 | 250 | | 242 | | 55.0 | 4.0 | |
| PBR 260255097 | 260 | | 255 | | 9.7 | 2.5 | |
| PBR 260255150 | 260 | | 255 | | 15.0 | 2.5 | |
| PBR 260252600 | 260 | | 252 | | 60.0 | 4.0 | |
| PBR 270265097 | 270 | | 265 | | 9.7 | 2.5 | |



Nominal Dimensions & Machining Tolerances

| Claron Part Number | H9 ØD ₁ | ≤115mm +0.05-0.00 >115mm +0.08-0.00 | ≤100mm +0.00-0.05 >100mm +0.00-0.08 | f8 | +0.20 -0.00 | Nom. Sec. | E |
|-----------------------|-----------------------|--|--|-----------------|----------------|------------|------------|
| | | ØD ₂ | Ød ₁ | Ød ₂ | L ₁ | S | |
| PBR 270265150 | 270 | | 265 | | 15.0 | 2.5 | 1.0 to 2.0 |
| PBR 270262600 | 270 | | 262 | | 60.0 | 4.0 | |
| PBR 280275150 | 280 | | 275 | | 15.0 | 2.5 | |
| PBR 280275250 | 280 | | 275 | | 25.0 | 2.5 | |
| PBR 280272250 | 280 | | 272 | | 25.0 | 4.0 | |
| | | | | | | | |
| PBR 320315150 | 320 | | 315 | | 15.0 | 2.5 | |
| PBR 320315250 | 320 | | 315 | | 25.0 | 2.5 | |
| PBR 320312250 | 320 | | 312 | | 25.0 | 4.0 | |
| PBR 360355150 | 360 | | 355 | | 15.0 | 2.5 | |
| PBR 360352250 | 360 | | 352 | | 25.0 | 4.0 | |
| | | | | | | | |
| PBR 400395150 | 400 | | 395 | | 15.0 | 2.5 | |
| PBR 400395250 | 400 | | 395 | | 25.0 | 2.5 | |
| PBR 400392250 | 400 | | 392 | | 25.0 | 4.0 | |
| PBR 450445150 | 450 | | 445 | | 15.0 | 2.5 | |
| PBR 450445250 | 450 | | 445 | | 25.0 | 2.5 | |
| | | | | | | | |
| PBR 450442250 | 450 | | 442 | | 25.0 | 4.0 | |
| PBR 500495150 | 500 | | 495 | | 15.0 | 2.5 | |
| PBR 500495250 | 500 | | 495 | | 25.0 | 2.5 | |
| PBR 500492250 | 500 | | 492 | | 25.0 | 4.0 | |

SECTION F Back-Up Rings



PTFE Back-Up Rings

Design

This range of products is designed to overcome the problems of 'O'-Ring extrusion when the system pressures are greater than the sealing capabilities of an unsupported 'O'-Ring. The use of P.T.F.E. for anti-extrusion rings has many advantages over 'hard rubber' materials, particularly at high system pressures. The cold flow characteristics of PTFE are used to full advantage in reducing the extrusion gaps to a minimum and allowing automatic compensation for wear. The capability of specialist compounding to suit extremes of duty combined with a high resistance to virtually all chemicals, low friction and wear rates render PTFE as the ideal material for anti-extrusion devices.

Variations

Spiral



The spiral back up ring is the most common style in use being effectively self adjusting to diametral tolerances. Spiral back up rings are manufactured from virgin PTFE only.

Manufactured to suit O-Rings to BS1806, BS4518, JISB2401, JW17000, MS28782 standards

Order as part number shown on table.e.g. BS 210 or as below...

| | |
|-------------------------|----------------------|
| BS1806 ... BS006 | JISB2401 ... JISP003 |
| BS4518 ... BS0031-16 | JW17000 ... SJWI7001 |
| MS28782 ... MS28782-001 | |

Endless




The endless back up ring is used where problems can occur with the rotation of a screwed endcaps which on assembly could cause a spiral type to unwind. Endless back up rings are normally manufactured from virgin PTFE.

Manufactured to suit O-Rings to BS1806, BS4518, JISB2401, MS27595 standards.

Order as part number shown on the table with suffix E, e.g. BS 210/E or as below...

| | |
|-----------------------|-------------------------|
| BS1806 ... BS006/E | BS4518 ... BS0031-16/E |
| JISB2401... JISP003/E | MS27595 ... MS27595-004 |

Endless Split



The endless split back up ring is manufactured as the endless style but is split at 30° to facilitate ease of assembly in certain applications. Endless split back up rings are normally manufactured from virgin PTFE.

Manufactured to suit O-Rings to BS1806, BS4518, JISB2401, MS28774, AS8791/1 standards.

Order as part number shown on the table with the suffix ES, e.g. BS 210/ES or as below...

| | |
|---------------------------|----------------------------|
| BS1806 ... BS006/ES | BS4518 ... BS0031-16/ES |
| JISB2401 ... JISP003/ES | MS28774 ... MS28774-004/ES |
| AS8791/1 ... M8791-004/ES | |

Materials


All the above can be supplied in a variety of PTFE materials including Virgin PTFE, Glass Filled PTFE and material specifications to MIL-R-8791/1.

The **Endless** and **Endless Split** Styles can also be supplied in Acetal, Nylon and Peek materials along with a variety of other filled PTFE grades such as Carbon and Bronze.

Housing


For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal. Refer to appendix 4 for value of tolerance symbols.

HOUSING DIMENSIONS (refer to following tables 1 & 2)

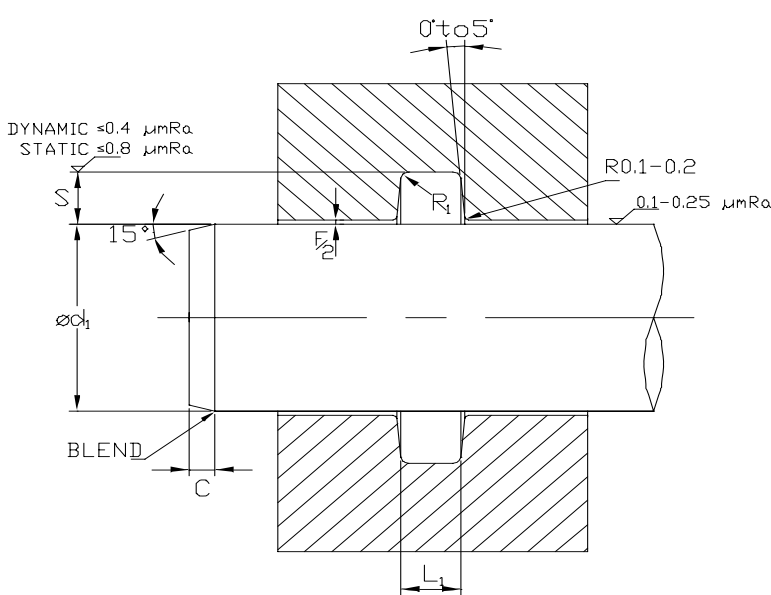

Gland housing arrangement


Max groove dia. = Shaft dia. d_1 min. + 2S max
Min groove dia. = Shaft dia. d_1 min. + 2S min.

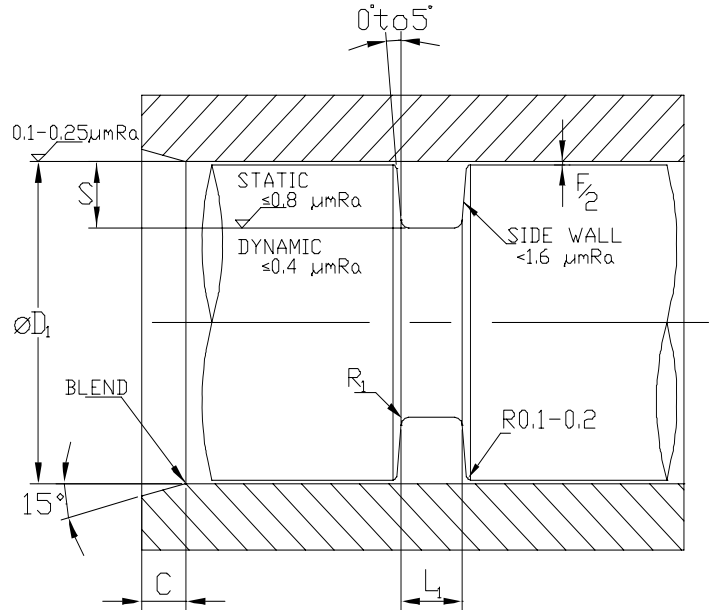

Piston housing arrangement

Max. groove dia. = Cylinder dia. D_1 min. - 2S min.
Min. groove dia. = Cylinder dia. D_1 max. - 2S max.

POSITIONING OF BACK-UP RINGS

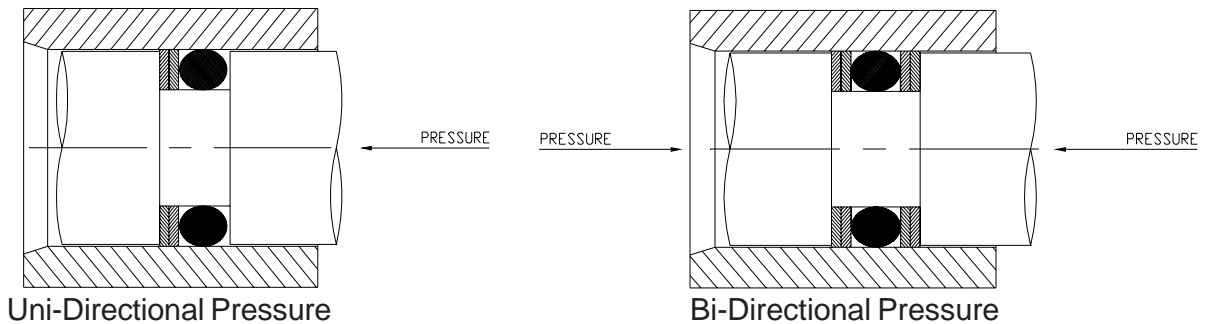


Fitting

For the back up ring to function correctly, it is important that care be taken in fitting the backup within its housing. For a detailed checklist, refer to Appendix 3.

Operating Conditions

Maximum Pressure Vs. Diametral Clearance 'F' for O-Rings & O-Rings with virgin PTFE Back up rings.
 If concentricity of mating diameters is assured, 'F' may be doubled for any given pressure.

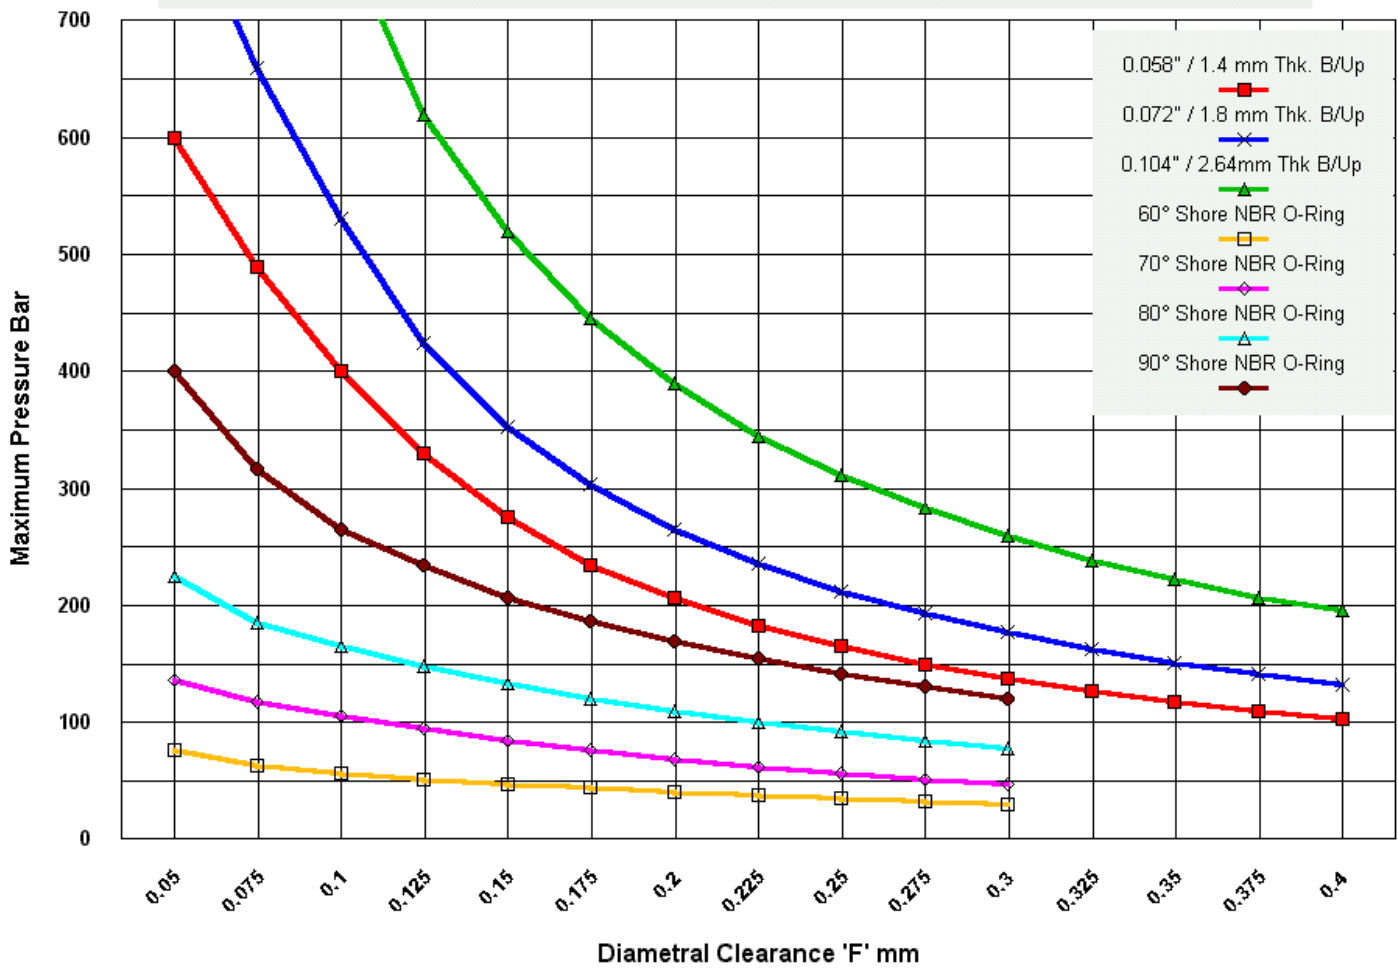

Where O-Rings are used in dynamic applications, an anti-extrusion ring is recommended for pressures >100bar and temperatures >100°C.

Housing groove dimensions for 'O'-Rings to BS1806 and BS4518 fitted with back-up rings in Dynamic and Static diametral applications.


Tables 1 & 2 refer to the housing drawings.

| IMPERIAL | | | | | | | | |
|---|------------------|--------|--------------------|--------|-------------------|--------|------------------|----------------|
| Housing groove dimensions for O-Rings to BS1806 fitted with back-up rings in Dynamic & Static diametral applications. | | | | | | | | |
| O-Ring Section | Radial Width 'S' | | Groove Width L_1 | | | | Radius 'R1' Max. | Cham. 'C' Min. |
| | | | One back-up ring | | Two back-up rings | | | |
| | Max. | Min. | Max. | Min. | Max. | Min. | | |
| 0.070" | 0.062" | 0.060" | 0.152" | 0.147" | 0.210" | 0.205" | 0.030" | 0.085" |
| 0.103" | 0.094" | 0.091" | 0.199" | 0.194" | 0.257" | 0.252" | 0.030" | 0.097" |
| 0.139" | 0.125" | 0.122" | 0.247" | 0.241" | 0.305" | 0.299" | 0.030" | 0.103" |
| 0.210" | 0.188" | 0.184" | 0.355" | 0.348" | 0.427" | 0.420" | 0.030" | 0.156" |
| 0.275" | 0.250" | 0.245" | 0.480" | 0.473" | 0.582" | 0.576" | 0.030" | 0.187" |


Table 1

| METRIC | | | | | | | | |
|---|------------------|---------|--------------------|--------|-------------------|---------|------------------|-----------------|
| Housing groove dimensions for O-Rings to BS4518 fitted with back-up rings in Dynamic & Static diametral applications. | | | | | | | | |
| O-Ring Section | Radial Width 'S' | | Groove Width L_1 | | | | Radius 'R1' Max. | Chamf. 'C' Min. |
| | | | One back-up ring | | Two back-up rings | | | |
| | Max. | Min. | Max. | Min. | Max. | Min. | | |
| 1.6 mm | 1.3 mm | 1.25 mm | 4.0 mm | 3.8 mm | 5.4 mm | 5.2 mm | 0.5 mm | 2.2 mm |
| 2.4 mm | 2.09 mm | 1.97 mm | 4.8 mm | 4.6 mm | 6.2 mm | 6.0 mm | 0.5 mm | 2.2 mm |
| 3.0 mm | 2.65 mm | 2.50 mm | 5.6 mm | 5.4 mm | 7.0 mm | 6.8 mm | 1.0 mm | 2.6 mm |
| 5.7 mm | 5.18 mm | 4.95 mm | 9.5 mm | 9.3 mm | 11.3 mm | 11.1 mm | 1.0 mm | 3.7 mm |

Table 2





PTFE Back-Up Rings
To Suit O-Rings to BS 1806

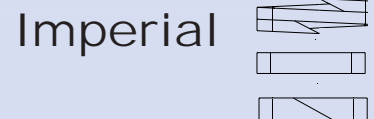

| Claron Part Number | Nominal Dimensions | | | | O-Ring Section | Claron Part Number | Nominal Dimensions | | | | O-Ring Section |
|--------------------|--------------------|-----------------|-------|--|----------------|--------------------|--------------------|-----------------|-------|--|----------------|
| | Ød ₁ | ØD ₁ | T | | | | Ød ₁ | ØD ₁ | T | | |
| BS 005 | 0.109 | 0.234 | | | | BS 113 | 0.562 | 0.750 | | | |
| BS 006 | 0.125 | 0.250 | | | | BS 114 | 0.625 | 0.812 | | | |
| BS 007 | 0.156 | 0.281 | | | | BS 115 | 0.687 | 0.875 | | | |
| BS 008 | 0.187 | 0.312 | | | | BS 116 | 0.750 | 0.937 | | | |
| BS 009 | 0.219 | 0.344 | | | | BS 117 | 0.812 | 1.000 | | | |
| BS 010 | 0.250 | 0.375 | | | | BS 118 | 0.875 | 1.062 | | | |
| BS 011 | 0.312 | 0.437 | | | | BS 119 | 0.937 | 1.125 | | | |
| BS 012 | 0.375 | 0.500 | | | | BS 120 | 1.000 | 1.187 | | | |
| BS 013 | 0.437 | 0.562 | | | | BS 121 | 1.062 | 1.250 | | | |
| BS 014 | 0.500 | 0.625 | | | | BS 122 | 1.125 | 1.312 | | | |
| BS 015 | 0.562 | 0.687 | | | | BS 123 | 1.187 | 1.375 | | | |
| BS 016 | 0.625 | 0.750 | | | | BS 124 | 1.250 | 1.437 | | | |
| BS 017 | 0.687 | 0.812 | | | | BS 125 | 1.312 | 1.500 | | | |
| BS 018 | 0.750 | 0.875 | | | | BS 126 | 1.375 | 1.562 | | | |
| BS 019 | 0.812 | 0.937 | | | | BS 127 | 1.437 | 1.625 | | | |
| BS 020 | 0.875 | 1.000 | | | | BS 128 | 1.500 | 1.687 | | | |
| BS 021 | 0.937 | 1.062 | | | | BS 129 | 1.562 | 1.750 | | | |
| BS 022 | 1.000 | 1.125 | | | | BS 130 | 1.625 | 1.812 | | | |
| BS 023 | 1.062 | 1.187 | | | | BS 131 | 1.687 | 1.875 | | | |
| BS 024 | 1.125 | 1.250 | | | | BS 132 | 1.750 | 1.937 | | | |
| BS 025 | 1.187 | 1.312 | | | | BS 133 | 1.812 | 2.000 | | | |
| BS 026 | 1.250 | 1.375 | | | | BS 134 | 1.875 | 2.062 | | | |
| BS 027 | 1.312 | 1.437 | 0.050 | | | BS 135 | 1.937 | 2.125 | 0.050 | | |
| BS 028 | 1.375 | 1.500 | to | | 0.070 | BS 136 | 2.000 | 2.187 | to | | 0.103 |
| BS 029 | 1.500 | 1.625 | 0.058 | | | BS 137 | 2.062 | 2.250 | 0.058 | | |
| BS 030 | 1.625 | 1.750 | | | | BS 138 | 2.125 | 2.312 | | | |
| BS 031 | 1.750 | 1.875 | | | | BS 139 | 2.187 | 2.375 | | | |
| BS 032 | 1.875 | 2.000 | | | | BS 140 | 2.250 | 2.437 | | | |
| BS 033 | 2.000 | 2.125 | | | | BS 141 | 2.312 | 2.500 | | | |
| BS 034 | 2.125 | 2.250 | | | | BS 142 | 2.375 | 2.562 | | | |
| BS 035 | 2.250 | 2.375 | | | | BS 143 | 2.437 | 2.625 | | | |
| BS 036 | 2.375 | 2.500 | | | | BS 144 | 2.500 | 2.687 | | | |
| BS 037 | 2.500 | 2.625 | | | | BS 145 | 2.562 | 2.750 | | | |
| BS 038 | 2.625 | 2.750 | | | | BS 146 | 2.625 | 2.812 | | | |
| BS 039 | 2.750 | 2.875 | | | | BS 147 | 2.687 | 2.875 | | | |
| BS 040 | 2.875 | 3.000 | | | | BS 148 | 2.750 | 2.937 | | | |
| BS 041 | 3.000 | 3.125 | | | | BS 149 | 2.812 | 3.000 | | | |
| BS 042 | 3.250 | 3.375 | | | | BS 150 | 2.875 | 3.062 | | | |
| BS 043 | 3.500 | 3.625 | | | | BS 151 | 3.000 | 3.187 | | | |
| BS 044 | 3.750 | 3.875 | | | | BS 152 | 3.250 | 3.437 | | | |
| BS 045 | 4.000 | 4.125 | | | | BS 153 | 3.500 | 3.687 | | | |
| BS 046 | 4.250 | 4.375 | | | | BS 154 | 3.750 | 3.937 | | | |
| BS 047 | 4.500 | 4.625 | | | | BS 155 | 4.000 | 4.187 | | | |
| BS 048 | 4.750 | 4.875 | | | | BS 156 | 4.250 | 4.437 | | | |
| BS 049 | 5.000 | 5.125 | | | | BS 157 | 4.500 | 4.687 | | | |
| BS 050 | 5.250 | 5.375 | | | | BS 158 | 4.750 | 4.937 | | | |
| BS 108 | 0.250 | 0.437 | | | | BS 159 | 5.000 | 5.187 | | | |
| BS 109 | 0.312 | 0.500 | 0.050 | | | BS 160 | 5.250 | 5.437 | | | |
| BS 110 | 0.375 | 0.562 | to | | 0.103 | BS 161 | 5.500 | 5.687 | | | |
| BS 111 | 0.437 | 0.625 | 0.058 | | | BS 162 | 5.750 | 5.937 | | | |
| BS 112 | 0.500 | 0.687 | | | | | | | | | |

PTFE Back-Up Rings
To Suit O-Rings to BS 1806

Imperial



| Claron Part Number | Nominal Dimensions | | | | Claron Part Number | Nominal Dimensions | | | |
|--------------------|--------------------|-----------------|----------------|----------------|--------------------|--------------------|-----------------|----------------|----------------|
| | Ød ₁ | ØD ₁ | T | O-Ring Section | | Ød ₁ | ØD ₁ | T | O-Ring Section |
| BS 206 | 0.500 | 0.750 | | | BS 256 | 5.750 | 6.000 | | |
| BS 207 | 0.562 | 0.812 | | | BS 257 | 5.875 | 6.125 | | |
| BS 208 | 0.625 | 0.875 | | | BS 258 | 6.000 | 6.250 | | |
| BS 209 | 0.687 | 0.937 | | | BS 259 | 6.250 | 6.500 | | |
| BS 210 | 0.750 | 1.000 | | | BS 260 | 6.500 | 6.750 | | |
| BS 211 | 0.812 | 1.062 | | | BS 261 | 6.750 | 7.000 | | |
| BS 212 | 0.875 | 1.125 | | | BS 262 | 7.000 | 7.250 | | |
| BS 213 | 0.937 | 1.187 | | | BS 263 | 7.250 | 7.500 | | |
| BS 214 | 1.000 | 1.250 | | | BS 264 | 7.500 | 7.750 | | |
| BS 215 | 1.062 | 1.312 | | | BS 265 | 7.750 | 8.000 | | |
| BS 216 | 1.125 | 1.375 | | | BS 266 | 8.000 | 8.250 | | |
| BS 217 | 1.187 | 1.437 | | | BS 267 | 8.250 | 8.500 | | |
| BS 218 | 1.250 | 1.500 | | | BS 268 | 8.500 | 8.750 | | |
| BS 219 | 1.312 | 1.562 | | | BS 269 | 8.750 | 9.000 | | |
| BS 220 | 1.375 | 1.625 | | | BS 270 | 9.000 | 9.250 | 0.050 to 0.058 | 0.139 |
| BS 221 | 1.437 | 1.687 | | | BS 271 | 9.250 | 9.500 | | |
| BS 222 | 1.500 | 1.750 | | | BS 272 | 9.500 | 9.750 | | |
| BS 223 | 1.625 | 1.875 | | | BS 273 | 9.750 | 10.000 | | |
| BS 224 | 1.750 | 2.000 | | | BS 274 | 10.000 | 10.250 | | |
| BS 225 | 1.875 | 2.125 | | | BS 275 | 10.500 | 10.750 | | |
| BS 226 | 2.000 | 2.250 | | | BS 276 | 11.000 | 11.250 | | |
| BS 227 | 2.125 | 2.375 | | | BS 277 | 11.500 | 11.750 | | |
| BS 228 | 2.250 | 2.500 | 0.050 to 0.058 | 0.139 | BS 278 | 12.000 | 12.250 | | |
| BS 229 | 2.375 | 2.625 | | | BS 279 | 13.000 | 13.250 | | |
| BS 230 | 2.500 | 2.750 | | | BS 280 | 14.000 | 14.250 | | |
| BS 231 | 2.625 | 2.875 | | | BS 281 | 15.000 | 15.250 | | |
| BS 232 | 2.750 | 3.000 | | | BS 282 | 16.000 | 16.250 | | |
| BS 233 | 2.875 | 3.125 | | | BS 283 | 17.000 | 17.250 | | |
| BS 234 | 3.000 | 3.250 | | | BS 284 | 18.000 | 18.250 | | |
| BS 235 | 3.125 | 3.375 | | | | | | | |
| BS 236 | 3.250 | 3.500 | | | BS 314 | 0.750 | 1.125 | | |
| BS 237 | 3.375 | 3.625 | | | BS 315 | 0.812 | 1.187 | | |
| BS 238 | 3.500 | 3.750 | | | BS 316 | 0.875 | 1.250 | | |
| BS 239 | 3.625 | 3.875 | | | BS 317 | 0.937 | 1.312 | | |
| BS 240 | 3.750 | 4.000 | | | BS 318 | 1.000 | 1.375 | | |
| BS 241 | 3.875 | 4.125 | | | BS 319 | 1.062 | 1.437 | | |
| BS 242 | 4.000 | 4.250 | | | BS 320 | 1.125 | 1.500 | | |
| BS 243 | 4.125 | 4.375 | | | BS 321 | 1.187 | 1.562 | | |
| BS 244 | 4.250 | 4.500 | | | BS 322 | 1.250 | 1.625 | | |
| BS 245 | 4.375 | 4.625 | | | BS 323 | 1.312 | 1.687 | | |
| BS 246 | 4.500 | 4.750 | | | BS 324 | 1.375 | 1.750 | | |
| BS 247 | 4.625 | 4.875 | | | BS 325 | 1.500 | 1.875 | 0.062 to 0.072 | 0.210 |
| BS 248 | 4.750 | 5.000 | | | BS 326 | 1.625 | 2.000 | | |
| BS 249 | 4.875 | 5.125 | | | BS 327 | 1.750 | 2.125 | | |
| BS 250 | 5.000 | 5.250 | | | BS 328 | 1.875 | 2.250 | | |
| BS 251 | 5.125 | 5.375 | | | BS 329 | 2.000 | 2.375 | | |
| BS 252 | 5.250 | 5.500 | | | BS 330 | 2.125 | 2.500 | | |
| BS 253 | 5.375 | 5.625 | | | BS 331 | 2.250 | 2.625 | | |
| BS 254 | 5.500 | 5.750 | | | BS 332 | 2.375 | 2.750 | | |
| BS 255 | 5.625 | 5.875 | | | BS 333 | 2.500 | 2.875 | | |
| | | | | | BS 334 | 2.625 | 3.000 | | |
| | | | | | BS 335 | 2.750 | 3.125 | | |
| | | | | | BS 336 | 2.875 | 3.250 | | |

PTFE Back-Up Rings
To Suit O-Rings to BS 1806


Imperial




Spiral




Solid. E




Solid Split. ES




| Claron Part Number | Nominal Dimensions | | | | Claron Part Number | Nominal Dimensions | | | |
|-----------------------|--------------------|-------------------|-------|-------------------|-----------------------|--------------------|-------------------|-------|-------------------|
| | $\varnothing d_1$ | $\varnothing D_1$ | T | O-Ring Section | | $\varnothing d_1$ | $\varnothing D_1$ | T | O-Ring Section |
| BS 337 | 3.000 | 3.375 | | | BS 425 | 4.500 | 5.000 | | |
| BS 338 | 3.125 | 3.500 | | | BS 426 | 4.625 | 5.125 | | |
| BS 339 | 3.250 | 3.625 | | | BS 427 | 4.750 | 5.250 | | |
| BS 340 | 3.375 | 3.750 | | | BS 428 | 4.875 | 5.375 | | |
| BS 341 | 3.500 | 3.875 | | | BS 429 | 5.000 | 5.500 | | |
| BS 342 | 3.625 | 4.000 | | | BS 430 | 5.125 | 5.625 | | |
| BS 343 | 3.750 | 4.125 | | | BS 431 | 5.250 | 5.750 | | |
| BS 344 | 3.875 | 4.250 | | | BS 432 | 5.375 | 5.875 | | |
| BS 345 | 4.000 | 4.375 | | | BS 433 | 5.500 | 6.000 | | |
| BS 346 | 4.125 | 4.500 | | | BS 434 | 5.625 | 6.125 | | |
| BS 347 | 4.250 | 4.625 | | | BS 435 | 5.750 | 6.250 | | |
| BS 348 | 4.375 | 4.750 | | | BS 436 | 5.875 | 6.375 | | |
| BS 349 | 4.500 | 4.875 | | | BS 437 | 6.000 | 6.500 | | |
| BS 350 | 4.625 | 5.000 | | | BS 438 | 6.250 | 6.750 | | |
| BS 351 | 4.750 | 5.125 | | | BS 439 | 6.500 | 7.000 | | |
| BS 352 | 4.875 | 5.250 | | | BS 440 | 6.750 | 7.250 | | |
| BS 353 | 5.000 | 5.375 | | | BS 441 | 7.000 | 7.500 | | |
| BS 354 | 5.125 | 5.500 | | | BS 442 | 7.250 | 7.750 | | |
| BS 355 | 5.250 | 5.625 | | | BS 443 | 7.500 | 8.000 | | |
| BS 356 | 5.375 | 5.750 | | | BS 444 | 7.750 | 8.250 | | |
| BS 357 | 5.500 | 5.875 | | | BS 445 | 8.000 | 8.500 | | |
| BS 358 | 5.625 | 6.000 | | | BS 445A | 8.250 | 8.750 | | |
| BS 359 | 5.750 | 6.125 | | | BS 446 | 8.500 | 9.000 | | |
| BS 360 | 5.875 | 6.250 | | | BS 446A | 8.750 | 9.250 | | |
| BS 361 | 6.000 | 6.375 | | | BS 447 | 9.000 | 9.500 | | |
| BS 362 | 6.250 | 6.625 | 0.062 | | BS 447A | 9.250 | 9.750 | 0.092 | |
| BS 363 | 6.500 | 6.875 | to | 0.210 | BS 448 | 9.500 | 10.000 | to | 0.275 |
| BS 364 | 6.750 | 7.125 | 0.072 | | BS 448A | 9.750 | 10.250 | 0.104 | |
| BS 365 | 7.000 | 7.375 | | | BS 449 | 10.000 | 10.500 | | |
| BS 366 | 7.250 | 7.625 | | | BS 449A | 10.250 | 10.750 | | |
| BS 367 | 7.500 | 7.875 | | | BS 450 | 10.500 | 11.000 | | |
| BS 368 | 7.750 | 8.125 | | | BS 450A | 10.750 | 11.250 | | |
| BS 369 | 8.000 | 8.375 | | | BS 451 | 11.000 | 11.500 | | |
| BS 370 | 8.250 | 8.625 | | | BS 451A | 11.250 | 11.750 | | |
| BS 371 | 8.500 | 8.875 | | | BS 452 | 11.500 | 12.000 | | |
| BS 372 | 8.750 | 9.125 | | | BS 452A | 11.750 | 12.250 | | |
| BS 373 | 9.000 | 9.375 | | | BS 453 | 12.000 | 12.500 | | |
| BS 374 | 9.250 | 9.625 | | | BS 454 | 12.500 | 13.000 | | |
| BS 375 | 9.500 | 9.875 | | | BS 455 | 13.000 | 13.500 | | |
| BS 376 | 9.750 | 10.125 | | | BS 456 | 13.500 | 14.000 | | |
| BS 377 | 10.000 | 10.375 | | | BS 457 | 14.000 | 14.500 | | |
| BS 378 | 10.500 | 10.875 | | | BS 458 | 14.500 | 15.000 | | |
| BS 379 | 11.000 | 11.375 | | | BS 459 | 15.000 | 15.500 | | |
| BS 380 | 11.500 | 11.875 | | | BS 460 | 15.500 | 16.000 | | |
| BS 381 | 12.000 | 12.375 | | | BS 461 | 16.000 | 16.500 | | |
| BS 382 | 13.000 | 13.375 | | | BS 462 | 16.500 | 17.000 | | |
| BS 383 | 14.000 | 14.375 | | | BS 463 | 17.000 | 17.500 | | |
| BS 384 | 15.000 | 15.375 | | | BS 464 | 17.500 | 18.000 | | |
| BS 385 | 16.000 | 16.375 | | | BS 465 | 18.000 | 18.500 | | |
| BS 386 | 17.000 | 17.375 | | | BS 466 | 18.500 | 19.000 | | |
| BS 387 | 18.000 | 18.375 | | | BS 467 | 19.000 | 19.500 | | |
| BS 388 | 19.000 | 19.375 | | | BS 468 | 19.500 | 20.000 | | |
| BS 389 | 20.000 | 20.375 | | | BS 469 | 20.000 | 20.500 | | |
| BS 390 | 21.000 | 21.375 | | | BS 470 | 21.000 | 21.500 | | |
| BS 391 | 22.000 | 22.375 | | | BS 471 | 22.000 | 22.500 | | |
| BS 392 | 23.000 | 23.375 | | | BS 472 | 23.000 | 23.500 | | |
| BS 393 | 24.000 | 24.375 | | | BS 473 | 24.000 | 24.500 | | |
| BS 394 | 25.000 | 25.375 | | | BS 474 | 25.000 | 25.500 | | |
| BS 395 | 26.000 | 26.375 | | | BS 475 | 26.000 | 26.500 | | |



PTFE Back-Up Rings
To Suit O-Rings to BS 4518




| Claron Part Number | Nominal Dimensions | | | | O-Ring Section | Claron Part Number | Nominal Dimensions | | | | O-Ring Section |
|--------------------|--------------------|-----------------|-----|-----|----------------|--------------------|--------------------|-----------------|-----|-----|----------------|
| | Ød ₁ | ØD ₁ | T | | | | Ød ₁ | ØD ₁ | T | | |
| BS 0031-16 | 3.5 | 6.0 | | | | BS 0195-30 | 20 | 25 | | | |
| BS 0041-16 | 4.5 | 7.0 | | | | BS 0215-30 | 22 | 27 | | | |
| BS 0051-16 | 5.5 | 8.0 | | | | BS 0225-30 | 23 | 28 | | | |
| BS 0061-16 | 6.5 | 9.0 | | | | BS 0245-30 | 25 | 30 | | | |
| BS 0071-16 | 7.5 | 10.0 | | | | BS 0255-30 | 26 | 31 | | | |
| BS 0081-16 | 8.5 | 11.0 | | | | BS 0265-30 | 27 | 32 | | | |
| BS 0091-16 | 9.5 | 12.0 | | | | BS 0275-30 | 28 | 33 | | | |
| BS 0101-16 | 10.5 | 13.0 | | | | BS 0295-30 | 30 | 35 | | | |
| BS 0111-16 | 11.5 | 14.0 | | | | BS 0315-30 | 32 | 37 | | | |
| BS 0121-16 | 12.5 | 15.0 | | | | BS 0325-30 | 33 | 38 | | | |
| BS 0131-16 | 13.5 | 16.0 | 1.2 | | | BS 0345-30 | 35 | 40 | | | |
| BS 0141-16 | 14.5 | 17.0 | to | 1.6 | | BS 0355-30 | 36 | 41 | | | |
| BS 0151-16 | 15.5 | 18.0 | 1.4 | | | BS 0365-30 | 37 | 42 | | | |
| BS 0161-16 | 16.5 | 19.0 | | | | BS 0375-30 | 38 | 43 | | | |
| BS 0171-16 | 17.5 | 20.0 | | | | BS 0395-30 | 40 | 45 | | | |
| BS 0181-16 | 18.5 | 21.0 | | | | BS 0415-30 | 42 | 47 | | | |
| BS 0191-16 | 19.5 | 22.0 | | | | BS 0425-30 | 43 | 48 | | | |
| BS 0221-16 | 22.5 | 25.0 | | | | BS 0445-30 | 45 | 50 | | | |
| BS 0251-16 | 25.5 | 28.0 | | | | BS 0495-30 | 50 | 55 | | | |
| BS 0271-16 | 27.5 | 30.0 | | | | BS 0545-30 | 55 | 60 | | | |
| BS 0291-16 | 29.5 | 32.0 | | | | BS 0555-30 | 56 | 61 | | | |
| BS 0321-16 | 32.5 | 35.0 | | | | BS 0575-30 | 58 | 63 | | | |
| BS 0351-16 | 35.5 | 38.0 | | | | BS 0595-30 | 60 | 65 | | | |
| BS 0371-16 | 37.5 | 40.0 | | | | BS 0635-30 | 64 | 69 | | | |
| BS 0036-24 | 4 | 8 | | | | BS 0645-30 | 65 | 70 | | | |
| BS 0046-24 | 5 | 9 | | | | BS 0695-30 | 70 | 75 | | | |
| BS 0056-24 | 6 | 10 | | | | BS 0745-30 | 75 | 80 | | | |
| BS 0066-24 | 7 | 11 | | | | BS 0795-30 | 80 | 85 | 1.2 | | |
| BS 0076-24 | 8 | 12 | | | | BS 0845-30 | 85 | 90 | to | 3.0 | |
| BS 0086-24 | 9 | 13 | | | | BS 0895-30 | 90 | 95 | 1.4 | | |
| BS 0096-24 | 10 | 14 | | | | BS 0945-30 | 95 | 100 | | | |
| BS 0106-24 | 11 | 15 | | | | BS 0995-30 | 100 | 105 | | | |
| BS 0116-24 | 12 | 16 | | | | BS 1045-30 | 105 | 110 | | | |
| BS 0126-24 | 13 | 17 | | | | BS 1095-30 | 110 | 115 | | | |
| BS 0136-24 | 14 | 18 | | | | BS 1145-30 | 115 | 120 | | | |
| BS 0146-24 | 15 | 19 | | | | BS 1195-30 | 120 | 125 | | | |
| BS 0156-24 | 16 | 20 | | | | BS 1245-30 | 125 | 130 | | | |
| BS 0166-24 | 17 | 21 | | | | BS 1295-30 | 130 | 135 | | | |
| BS 0176-24 | 18 | 22 | | | | BS 1345-30 | 135 | 140 | | | |
| BS 0186-24 | 19 | 23 | | | | BS 1395-30 | 140 | 145 | | | |
| BS 0196-24 | 20 | 24 | | | | BS 1445-30 | 145 | 150 | | | |
| BS 0206-24 | 21 | 25 | | | | BS 1495-30 | 150 | 155 | | | |
| BS 0216-24 | 22 | 26 | | | | BS 1545-30 | 155 | 160 | | | |
| BS 0246-24 | 25 | 29 | | | | BS 1595-30 | 160 | 165 | | | |
| BS 0276-24 | 28 | 32 | 1.2 | | | BS 1645-30 | 165 | 170 | | | |
| BS 0296-24 | 30 | 34 | to | 2.4 | | BS 1695-30 | 170 | 175 | | | |
| BS 0316-24 | 32 | 36 | 1.4 | | | BS 1745-30 | 175 | 180 | | | |
| BS 0346-24 | 35 | 39 | | | | BS 1795-30 | 180 | 185 | | | |
| BS 0356-24 | 36 | 40 | | | | BS 1845-30 | 185 | 190 | | | |
| BS 0376-24 | 38 | 42 | | | | BS 1895-30 | 190 | 195 | | | |
| BS 0396-24 | 40 | 44 | | | | BS 1945-30 | 195 | 200 | | | |
| BS 0416-24 | 42 | 46 | | | | BS 1995-30 | 200 | 205 | | | |
| BS 0446-24 | 45 | 49 | | | | BS 2045-30 | 205 | 210 | | | |
| BS 0456-24 | 46 | 50 | | | | BS 2095-30 | 210 | 215 | | | |
| BS 0476-24 | 48 | 52 | | | | BS 2195-30 | 220 | 225 | | | |
| BS 0496-24 | 50 | 54 | | | | BS 2295-30 | 230 | 235 | | | |
| BS 0516-24 | 52 | 56 | | | | BS 2395-30 | 240 | 245 | | | |
| BS 0536-24 | 54 | 58 | | | | BS 2495-30 | 250 | 255 | | | |
| BS 0546-24 | 55 | 59 | | | | | | | | | |
| BS 0576-24 | 58 | 62 | | | | | | | | | |
| BS 0586-24 | 59 | 63 | | | | | | | | | |
| BS 0596-24 | 60 | 64 | | | | | | | | | |
| BS 0616-24 | 62 | 66 | | | | | | | | | |
| BS 0626-24 | 63 | 67 | | | | | | | | | |
| BS 0646-24 | 65 | 69 | | | | | | | | | |
| BS 0676-24 | 68 | 72 | | | | | | | | | |
| BS 0696-24 | 70 | 74 | | | | | | | | | |



PTFE Back-Up Rings
To Suit O-Rings to BS 4518

Metric



| Claron Part Number | Nominal Dimensions | | | | O-Ring Section | Claron Part Number | Nominal Dimensions | | | | O-Ring Section |
|--------------------|--------------------|-----------------|------------------|-----|----------------|--------------------|--------------------|------------------|-----|--|----------------|
| | Ød ₁ | ØD ₁ | T | | | | Ød ₁ | ØD ₁ | T | | |
| BS 0443-57 | 45 | 55 | 1.6 to 1.8 | 5.7 | BS 1743-57 | 175 | 185 | 1.6 to 1.8 | 5.7 | | |
| BS 0453-57 | 46 | 56 | | | BS 1793-57 | 180 | 190 | | | | |
| BS 0493-57 | 50 | 60 | | | BS 1843-57 | 185 | 195 | | | | |
| BS 0523-57 | 53 | 63 | | | BS 1893-57 | 190 | 200 | | | | |
| BS 0543-57 | 55 | 65 | | | BS 1943-57 | 195 | 205 | | | | |
| BS 0553-57 | 56 | 66 | | | BS 1993-57 | 200 | 210 | | | | |
| BS 0593-57 | 60 | 70 | | | BS 2043-57 | 205 | 215 | | | | |
| BS 0623-57 | 63 | 73 | | | BS 2093-57 | 210 | 220 | | | | |
| BS 0643-57 | 65 | 75 | | | BS 2143-57 | 215 | 225 | | | | |
| BS 0693-57 | 70 | 80 | | | BS 2193-57 | 220 | 230 | | | | |
| BS 0743-57 | 75 | 85 | | | BS 2293-57 | 230 | 240 | | | | |
| BS 0793-57 | 80 | 90 | | | BS 2393-57 | 240 | 250 | | | | |
| BS 0843-57 | 85 | 95 | | | BS 2493-57 | 250 | 260 | | | | |
| BS 0893-57 | 90 | 100 | | | BS 2593-57 | 260 | 270 | | | | |
| BS 0943-57 | 95 | 105 | | | BS 2693-57 | 270 | 280 | | | | |
| BS 0993-57 | 100 | 110 | | | BS 2793-57 | 280 | 290 | | | | |
| BS 1043-57 | 105 | 115 | BS 2893-57 | 290 | 300 | | | | | | |
| BS 1093-57 | 110 | 120 | BS 2993-57 | 300 | 310 | | | | | | |
| BS 1143-57 | 115 | 125 | BS 3193-57 | 320 | 330 | | | | | | |
| BS 1193-57 | 120 | 130 | BS 3393-57 | 340 | 350 | | | | | | |
| BS 1243-57 | 125 | 135 | BS 3593-57 | 360 | 370 | | | | | | |
| BS 1293-57 | 130 | 140 | BS 3793-57 | 380 | 390 | | | | | | |
| BS 1343-57 | 135 | 145 | BS 3993-57 | 400 | 410 | | | | | | |
| BS 1393-57 | 140 | 150 | BS 4193-57 | 420 | 430 | | | | | | |
| BS 1443-57 | 145 | 155 | BS 4393-57 | 440 | 450 | | | | | | |
| BS 1493-57 | 150 | 160 | BS 4593-57 | 460 | 470 | | | | | | |
| BS 1543-57 | 155 | 165 | BS 4793-57 | 480 | 490 | | | | | | |
| BS 1593-57 | 160 | 170 | BS 4893-57 | 490 | 500 | | | | | | |
| BS 1643-57 | 165 | 175 | BS 4993-57 | 500 | 510 | | | | | | |
| BS 1693-57 | 170 | 180 | | | | | | | | | |

Imperial and Metric Back-Up Rings for Special Internal and External Static or Dynamic Applications.

| O-Ring Section mm | Groove Dimensions | | Nominal | Housing Diameters | | | | Groove Width | |
|-------------------------|---------------------|-------------|-------------|-------------------|----------|------------|----------|---------------|----------------|
| | Nom. Radial Depth S | | B/Up Ring | Static | Static | Dynamic | Dynamic | One B/Up Ring | Two B/Up Rings |
| | Static | Dynamic | Thickness | ID d1 h9 | OD D1 H9 | ID d1 h9 | OD D1 H9 | L1 +0.2 | L2 +0.2 |
| | S | S | T | D1-2S | d1+2S | D1-2S | d1+2S | mm | mm |
| 1.50 | 1.10 | 1.25 | 1.00 | D1-2.2 | d1+2.2 | D1-2.5 | d1+2.5 | 3.00 | 4.00 |
| 1.60 | 1.20 | 1.30 | 1.00 | D1-2.4 | d1+2.4 | D1-2.6 | d1+2.6 | 3.80 | 5.20 |
| 1.78 | 1.30 | 1.50 | 1.40 | D1-2.6 | d1+2.6 | N/A see F4 | d1+3.0 | 3.80 | 5.20 |
| 2.00 | 1.50 | 1.65 | 1.40 | D1-3.0 | d1+3.0 | D1-3.0 | d1+3.3 | 4.10 | 5.50 |
| 2.40 | 1.80 | 2.05 | 1.40 | D1-3.6 | d1+3.6 | N/A see F4 | d1+4.1 | 4.60 | 6.00 |
| 2.50 | 1.90 | 2.15 | 1.40 | D1-3.8 | d1+3.8 | D1-4.3 | d1+4.3 | 4.70 | 6.10 |
| 2.62 | 2.00 | 2.25 | 1.40 | D1-4.0 | d1+4.0 | N/A see F4 | d1+4.5 | 5.00 | 6.40 |
| 3.00 | 2.30 | 2.60 | 1.40 | D1-4.6 | d1+4.6 | N/A see F4 | d1+5.2 | 5.40 | 6.80 |
| 3.53 | 2.70 | 3.10 | 1.40 | D1-5.4 | d1+5.4 | N/A see F4 | d1+6.2 | 6.20 | 7.60 |
| 4.00 | 3.10 | 3.50 | 1.70 | D1-6.2 | d1+6.2 | D1-7.0 | d1+7.0 | 6.90 | 8.60 |
| 5.00 | 4.00 | 4.40 | 1.70 | D1-8.0 | d1+8.0 | D1-8.8 | d1+8.8 | 8.30 | 10.00 |
| 5.34 | 4.30 | 4.70 | 1.70 | D1-8.6 | d1+8.6 | N/A see F4 | d1+9.4 | 8.80 | 10.60 |
| 5.70 | 4.60 | 5.00 | 1.70 | D1-9.2 | d1+9.2 | N/A see F4 | d1+10.0 | 9.30 | 11.10 |
| 6.00 | 4.90 | 5.30 | 1.70 | D1-9.8 | d1+9.8 | D1-10.6 | d1+10.6 | 9.60 | 11.40 |
| 6.99 | 5.80 | 6.10 | 2.50 | D1-11.6 | d1+11.6 | N/A see F4 | d1+12.2 | 12.00 | 14.60 |
| 8.00 | 6.70 | 7.10 | 2.50 | D1-13.4 | d1+13.4 | D1-14.2 | d1+14.2 | 13.30 | 15.90 |
| 8.40 | 7.10 | 7.50 | 2.50 | D1-14.2 | d1+14.2 | D1-15.0 | d1+15.0 | 13.60 | 16.20 |

Claron Back-up Rings are manufactured for the above housing parameters in various Styles

| STYLE | Style and ISO 3601-4 Designation | Internal Static Ref. Virgin PTFE | External Static and Dynamic Ref. Virgin PTFE | BS STANDARD Internal Dynamic Ref. Virgin PTFE | NON BS STANDARD Internal Dynamic Ref. Virgin PTFE |
|-----------------|----------------------------------|----------------------------------|--|---|---|
| Spiral | no suffix (T1) | CBI(S)-(d1) | CBE(S)-(D1) | BS ref. Eg BS010 | CBI(S)-(d1) |
| Endless Split | ES (T2) | CBI(S)-(d1)/ES | CBE(S)-(D1)/ES | BS ref. Eg BS010/ES | CBI(S)-(d1)/ES |
| Endless | E (T3) | CBI(S)-(d1)/E | CBE(S)-(D1)/E | BS ref. Eg BS010/E | CBI(S)-(d1)/E |
| Contoured Split | PB/S (T4) | CBI(S)-(d1)/PB/S | CBE(S)-(D1)/PB/S | BS ref. Eg BS010/PB/S | CBI(S)-(d1)/PB/S |
| Contoured | PB (T5) | CBI(S)-(d1)/PB | CBE(S)-(D1)/PB | BS ref. Eg BS010/PB | CBI(S)-(d1)/PB |

The above tables are intended for Internal and External Back-up Rings for specific Static and Dynamic Applications.

How to order

Internal Sealing

For **Internal Static** sealing use **CBI** prefix followed by radial section (S) and internal diameter (d1) followed by style and material code where applicable.

eg. Endless Style, static ID sealing for 1.6mm O-ring, 10mm Id. Ref. **CBI12-0100/E**

eg. Spiral Style, static ID sealing for 1.6mm O-ring, 10mm Id. Ref. **CBI12-0100**

eg. Contoured Style, static ID sealing for 1.6mm O-ring, 10mm Id. Ref. **CBI12-0100/PB**

For **Internal Dynamic** sealing for **Non-BS Standard** sizes use **CBI** prefix followed by radial section (S) and internal diameter (d1) style and material code where applicable.

eg. Endless Style, Dynamic ID sealing for 2.0mm O-ring, 20mm Id. Ref. **CBI165-0200/E**

All O-ring sections Highlighted **Bold** are **British Standard** sizes to **BS1806** or **BS5106**.

British Standard sizes are manufactured using the nominal ID dimension for General Purpose Dynamic applications

See Catalogue pages **F4-4** to **F4-9** for the housing detail and reference numbers for **BS standard** sizes. eg. Spiral Style BS010

External Sealing

For **External** sealing use **CBE** prefix followed by radial section (S) and external diameter (D1) style and material code where applicable

eg. Endless Split Style, static OD sealing for 1.6mm O-ring, 20mm OD. Ref. **CBE12-0200/ES**

eg. Endless Split Style, Dynamic OD sealing for 1.6mm O-ring, 20mm OD. Ref. **CBE13-0020/ES**

eg. Spiral Style, Dynamic OD sealing for 1.6mm O-ring, 20mm od. Ref. **CBE13-0200**

eg. Contoured Style, static OD sealing for 1.6mm O-ring, 10mm Id. Ref. **CBE12-0100/PB**

Imperial and Metric Back-Up Rings for Special Internal and External Static or Dynamic Applications.

Materials

Claron Back-up Rings are manufactured as Standard in Virgin PTFE. Other materials are also utilised to enhance performance. (Spiral Back-up Rings are only manufactured in Virgin PTFE and 15% Glass)


Claron Virgin PTFE meets FDA regulation code 21CFR sec 177.1550 and EU directive 10/2011 EC for contact with food, also meets WRAS Approval.

| Materials | Material / Style Availability | | | |
|---|-------------------------------|--------------------|--------------------|---------------------|
| | Material Code | Spiral (T1) | Endless (T2 & T3) | Contoured (T4 & T5) |
| Virgin PTFE | Suffix | Standard Material | Standard Material | Available to order |
| Standard material for all styles, requires no material suffix | | | | |
| Virgin PTFE Norsok M-710 | /V/M710 | Available to order | Available to order | Available to order |
| 15% GLASS PTFE | /GC | Available to order | Available to order | Available to order |
| 25% GLASS PTFE | /GE | N/A | Available to order | Available to order |
| 15% GRAPHITE PTFE | /R | N/A | Available to order | Available to order |
| 10% CARBON FIBRE PTFE | /CF | N/A | Available to order | Available to order |
| 20% CARBON PTFE | /C | N/A | Available to order | Available to order |
| 46% Bronze MoS2 PTFE | /B | N/A | Available to order | Available to order |
| Acetal (POM) | /A | N/A | Available to order | Available to order |
| Peek 450G | /P | N/A | Available to order | Available to order |
| Peek PVX | /P/PVX | N/A | Available to order | Available to order |

See page F4-3 of the Claron Catalogue
for the maximum Operating conditions of the various thicknesses of Virgin PTFE.

Claron also manufacture Back-up Rings to other standards, Contact **Claron** for details

| | |
|------------------------|---|
| BS1806 | Spiral, Endless/Split & Contoured/Split, See Section F4 |
| BS5106 (BS4518) | Spiral, Endless/Split & Contoured/Split, See Section F4 |
| MS27595 | Endless MS27595-***E to AMS3678 Type 1 Grade B, unless specified as Grade A |
| MS28773 | Endless Split MS28773-** Inactive for designs after 1997, material AMS3678 Type 1 Grade B |
| MS28774 | Endless Split MS28774-***ES to AMS3678 Type 1 Grade B, unless specified as Grade A |
| MS28782 | Spiral MS28782-** to AMS3678 Type 1 Grade B, unless specified as Grade A |
| MS28783 | Spiral MS28783-** to AMS3678 Type 1 Grade B, unless specified as Grade A |
| MIL-R-8791/1 | Endless Split M8791/1-*** Superceded by SAE AS8791, order as M8791/1-*** |
| AS8791 | Endless Split M8791/1-*** to AMS3678 Type 1 Grade B, unless specified as Grade A |
| JIS B 2407 | Spiral JISG*** Virgin PTFE only |
| JIS B 2407 | Endless JISP***/Mat'l/E Various PTFE materials including Virgin and Bronze filled |
| JIS B 2407 | Endless Split JISP***/Mat'l/ES Various PTFE materials including Virgin and Bronze filled |



Claron Polyseal® Static Flange Seal CFS



Design

Claron style CFS flange seal is designed to suit the SAE J518 range of flanges, and common metric flange sizes. The seal is manufactured in Claron's high performance grade of Polyurethane with excellent resistance to extrusion and compression set over a wide temperature range. The design offers many performance advantages over common o-ring, or rubber based flange seals, including the elimination of the 'pumping effect'.

Operating Conditions

| Max. Pressure | Temp Range |
|---------------|--------------|
| 400 Bar | -40 to 110°C |

These range parameters are Maximum simultaneous conditions. Optimum service conditions are affected by temperature, pressure, surface finish and extrusion gaps. Refer to Appendix 1 for further information.

Continuous operating temperature for various Fluids


| AU Polyurethane | | |
|-----------------|--|-----|
| DIN | Hydraulic Fluid Description | °C |
| H | Mineral oil without additives | 100 |
| H-L | Mineral Fluid with anti corrosion and anti ageing additives | 100 |
| H-LP | Mineral oil as HL plus additives reducing wear, raising load | 100 |
| H-LPD | Mineral oil as H-LP but with detergents and dispersants | 100 |
| H-V | Mineral oil as H-LP plus improved viscosity temp. | 100 |
| HFA E | Emulsions of mineral oil in water. Water content 80-95% | 40 |
| HFA S | Synthetic oil in water. Water content 80-95% | 40 |
| HFB | Emulsions of water in mineral oil. Water content 40% | 40 |
| HFC | Aqueous polymer solutions. Water content 35% | ns |
| HFD R | Phosphoric acid ester based | ns |
| HFD S | Chlorinated hydrocarbon based | ns |
| HFD T | Mixtures of HFD R and HFD S | ns |
| HEPG | Polyglycol based | ns |
| HETG | Vegetable Oil based | 60 |
| HEES | Fully synthetic ester based | 60 |


Housing

For surface finish and recommended lead in chamfers refer to the illustration below. For housing dimensions and machining tolerances refer to the catalogue page of selected seal.

Fitting


For the seal to function correctly, it is important that care be taken in fitting the seal within its housing. For a detailed checklist, refer to Appendix 3.

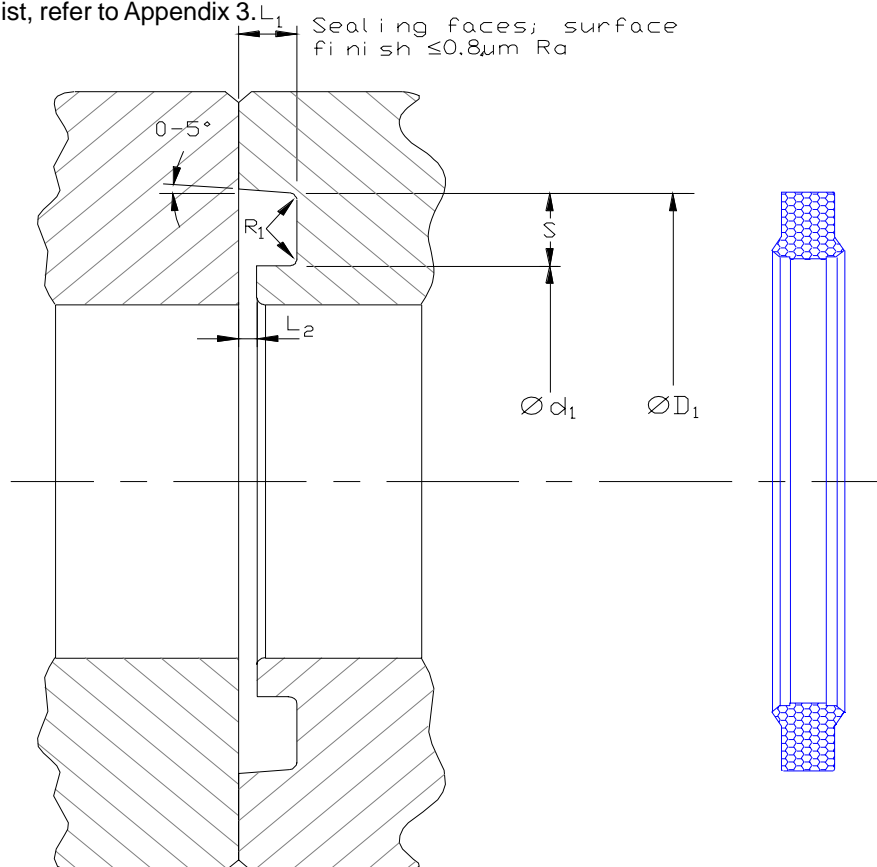




ClaronPolyseal®
Static Flange Seal
CFS

Metric



Nominal Dimensions & Machining Tolerances


| Claron Part Number | Nominal Flange Size | +0.10 | Nominal | +0.05 | +0.00 | +0.25 | Max. |
|-----------------------|------------------------|-----------------|-----------------|----------------|----------------|-------|----------------|
| | | -0.10 | Ød ₁ | -0.05 | -0.25 | -0.25 | |
| | | ØD ₁ | | L ₁ | L ₂ | S | R ₁ |
| CFSM 0335-0263 | - | 33.5 | 26.3 | 2.2 | 0.25 | 3.6 | 0.5 |
| CFSM 0450-0362 | - | 45.0 | 36.2 | 3.3 | 0.25 | 4.4 | 0.5 |



ClaronPolyseal®

Static Flange Seal
CFS

Imperial
SAE J518



Nominal Dimensions & Machining Tolerances

| Claron Part Number | Nominal Flange Size | +0.005 -0.005 ØD ₁ | Nominal Ød ₁ | +0.005 -0.005 L ₁ | +0.000 -0.010 L ₂ | +0.010 -0.010 S | Max. R ₁ |
|--------------------|---------------------|-------------------------------------|----------------------------|------------------------------------|------------------------------------|-----------------------|------------------------|
| CFS 0500 | 0.500 | 1.000 | 0.670 | 0.110 | 0.010 | 0.165 | 0.030 |
| CFS 0750 | 0.750 | 1.250 | 0.920 | 0.110 | 0.010 | 0.165 | 0.030 |
| CFS 1000 | 1.000 | 1.560 | 1.230 | 0.110 | 0.010 | 0.165 | 0.030 |
| CFS 1250 | 1.250 | 1.750 | 1.420 | 0.110 | 0.010 | 0.165 | 0.030 |
| CFS 1500 | 1.500 | 2.125 | 1.785 | 0.110 | 0.010 | 0.165 | 0.030 |
| CFS 2000 | 2.000 | 2.500 | 2.160 | 0.110 | 0.010 | 0.165 | 0.030 |

OTHER CLARON GROUP PRODUCTS

Claron (Plastics) Ltd.

Website www.claron.co.uk

Claron (Plastics) Ltd. is the U.K.'s largest manufacturer of stock shapes based on P.T.F.E. compounds specifically developed for sealing systems. The quality of this range has also gained the approval and wide spread use of many other industries, including chemical and process plant. Typical machined products include bellows, balls, lantern rings, valve seats, and dip pipes. For further detailed information on the above, or technical design details of specific products, contact:-

Claron (Plastics) Ltd.
Alders Way, Yalberton Industrial Estate, Paignton,
Devon TQ4 7QL. U.K.
Tel: +44 (0)1803 528677
Fax: +44 (0)1803 525134
[E-mail: plastics@claron.co.uk](mailto:plastics@claron.co.uk)



Claron Hydraulic Services

Claron Hydraulic Services manufacture an extensive range of 'standard seals', Bearing rings, Back-up rings, and PTFE O-Rings supplemented by an unsurpassed capability for custom designed products and the high quality production of complex components to customer specification.

Claron's knowledge and expertise also includes the use of other specialist engineering plastics such as PCTFE, PEEK, UHMWPE, POM, PA, etc. and the production of various products in designs and sizes to meet other European, Asian, and American housing standards. For further information on these and any other plastic sealing products, contact:-

Claron Hydraulic Services.
Alders Way, Yalberton Industrial Estate, Paignton,
Devon TQ4 7QL. U.K.
Tel: +44 (0)1803 528852
Fax: +44 (0)1803 525134
[E-mail: services@claron.co.uk](mailto:services@claron.co.uk)

Claron Hydraulic Seals Ltd

Claron Hydraulic Seals Ltd. manufacture a comprehensive range of high quality hydraulic and pneumatic sealing systems. The range encompasses the latest modern designs including one piece piston seals, Polyurethane rod seals, and wiper seals. The product ranges meet European, American, and Asian housing standards and are manufactured in materials including rubber fabric, Polyurethane, modified P.T.F.E.'s and other high performance compounds. Claron also provides a range of customer related services including the supply of seal kits packaged to meet the requirements of both production and after market sales.

Contact:-

Claron Hydraulic Seals Ltd.
Station Road, Cradley Heath, Warley,
West Midlands. B64 6PN U.K.
Tel: +44 (0)121 559 9711
Fax: +44 (0)121 559 1036
[E-mail: sales@claron-seals.co.uk](mailto:sales@claron-seals.co.uk)



APPENDIX 1-1 SEAL SELECTION GUIDE

Seal

selection

At first glance, there are almost as many seal designs as there are applications. In practice there are only a few principles to apply to any application design and thereafter the constraints of material choice, production technique and acceptable cost designate a suitable type of seal. Refinements to various aspects of seal geometry, material properties and housing designs can however have a significant effect on the performance and capability of the seal.

Claron as a manufacturer of hydraulic pressure seals in a huge variety of designs and materials ensure that the products offered are based upon the sound knowledge of performance and suitability for any given application, rather than upon the limitations of availability. Whatever the demand and complexity of the required sealing system every seal has the same basic function, to prevent or minimise leakage between the two parts. When selecting a seal a series of requirements are made by those using seals and these should be given consideration before final selection is made.

- Environmental Serviceability
- Simple Installation
- Operational Reliability
- Tolerance to the sealing media
- Frictional requirements
- Ability to function within a temperature range
- Good sealing at high and low pressures
- Resistance to extrusion between mating parts

Consideration and evaluation of these demands within the seals operating conditions is important as are the influencing factors of pressure, temperature, speed, and surface finish.

influencing

Factors**effect of Pressure**

Pressure affects the seal by forcing it into the gap which exists between tolerated machined parts at the non pressure side of the seal. When the gap is too large the heel of the seal will show "nibbling" and result in premature seal failure. This extrusion will increase if the seal is in a condition of side loading. To minimise extrusion whilst maintaining reasonable machining tolerances seals fitted with anti-extrusion wear rings should be selected. The use of bearing rings will also reduce potential maximum extrusion gaps. Permissible extrusion gaps / pressure graphs are shown for all piston and rod seals within this catalogue.

effect of Temperature

The operating temperature of the sealing media affects the choice of sealing materials. Normal operating temperatures are usually between 80°C and sometimes 100°C. The optimum functional temperature for seals and oil stability is between 40°C and 50°C. At low temperatures the seal material will stiffen and may become brittle although it will relax as the temperature rises. With high temperatures the seal material will become more elastic and lose compression set. The higher temperatures will also reduce the viscosity of the oil resulting in accelerated wear of the seals. For PTFE seals the effect of temperature will be based on the seals energiser.

effect of Velocity

Seals ride on a film of lubricant between the seal lip and moving surface. The fluid is drawn under by movement and is known as hydrodynamic drag. Friction will depend upon the thickness of this lubricating film which will be squeezed to its minimum thickness when there is no movement, and creates stiction. Frictional force begins to decrease with an increase in velocity as more lubricating fluid is then drawn between the seal and moving surface. There is a point reached with increasing velocity that the frictional force again rises and the seal will begin to wear. PTFE seals have an extremely low coefficient of friction when moving on other surfaces and may be a possible exception to this rule.

effect of Surface Finish

The operating life of a seal is greatly influenced by the considerations of the dynamic surface and the method used to produce this surface texture. For instance honing and roller burnishing may give the same surface finish value but the surface profile would differ. The aim of all types of surface finish is to provide a surface which causes the minimum wear to the seal. Rod seals because of their position in the sealing system are prone to contaminants entering from the atmosphere and therefore rods should have a surface resistance to corrosion and similar to the best hard chrome. The static surfaces of the seal housing are important as the sealing media may pass over the seal if not within the recommended surface finish. Figure 2 shows a diagrammatic representation of average roughness value Ra.

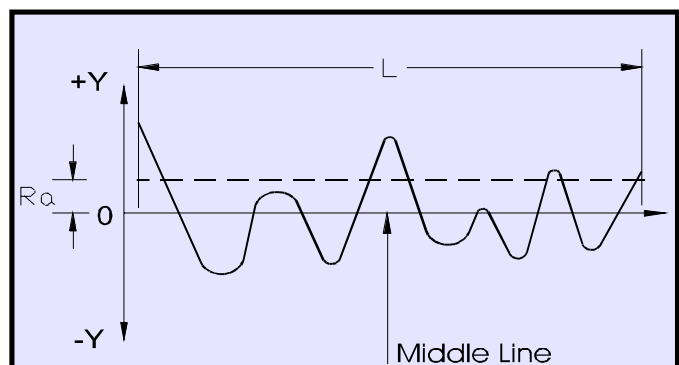


Figure 2

The average roughness Ra (CLA an abbreviation of centre line average height) is the arithmetic and geometric average value of the profile variation in Y direction from the middle line within the reference length L

The optimum values of surface roughness for various seal types is summarised below:-

PTFE Seals optimum Ra : 0.1 - 0.25 µm

Above 0.3µm : Effect dependant upon Rsk (skewness)

Rsk -1 : Higher leakage, little wear

Rsk < -1 : High friction and wear

Below 0.1µm : Friction and wear increases

Rubber Seals Dynamic optimum Ra : 0.1 - 0.25 µm

upto 0.4 µm : Slight increase in wear

above 0.4 µm : Wear leakage and friction increase

below 0.05 µm : High friction and wear

Rubber Seals Static optimum Ra : < 0.8 µm

Polyurethane Seals optimum Ra: <0.25 µm

above 0.3 µm : Expect high wear and leakage

Axial scores : Do not effect seal performance if less than 0.05 µm in depth

effect of Contamination

Contamination within the system can occur due to inadequate cleaning of parts before assembly or/and due to operational debris from the seal and bearings. With levels of contamination more intensive around the seal area than in the system generally. The effect of contamination is that of seal wear and damage usually in the form of axial scores. The extent of probability of leakage will depend upon seal materials with PTFE being more prone to leakage when scored. Contaminants may also lodge under the sealing lip allowing a leak path. Bearing materials used in conjunction with seals may also effect oil contamination due to wear debris with metal bearings producing an increase in leakage probability although reducing the surface roughness slightly when used with rods.

effect of Vapour

Hydraulic fluids contain molecules of air which is liberated by agitation. Air bubbles then occur and an oil vapour collects usually at the highest point in the system. Compression of this mixture will result in a temperature rise causing compression ignition. This process is repeatable and is known as Diesel effect destroying the seal if repeated frequently. The sealing arrangement may be protected with the use of Phenolic or phosphor bronze rings strategically housed. Sometimes air bubbles will be forced over the seal face expanding as they move to the low pressure side of the seal manifesting itself as axial grooves and resulting in subsequent seal failure.

PTFE Seal

selection

Why choose P.T.F.E Composite Seals?

Composite Seals were originally designed for low- friction or high-temperature applications. The development of **PTFE and PTFE Compounds** in particular, with these capabilities, has greatly extended the useful range of these seals far beyond that of conventional Rubber / Elastomer based Lip-seals. Designs based upon an understanding of lip-geometry and use of the latest developments in material technology have allowed **Composite Seals** to become acceptable in the normal sphere of operation of Lip-seals, not just in the extremes of duty for which they were originally intended.

Speed & Friction

The optimum speed range for conventional Lip-seals is 0.1 - 0.5 m/sec. and whilst speeds of up to 4 m/sec. can be accommodated this, is only at the expense of performance and life. Below 0.1 m/sec. and above 0.5 m/sec the friction values rise sharply due to the breakdown of the lubricant film, causing friction and a build-up of heat. At temperatures above 50°C this additional heat can also adversely affect the sealing material, causing swell, hardness and mechanical property changes, with a resultant loss of performance.

Low-Friction seals are obviously desirable at these extremes of speed or even through the optimum working range of Lip-seals when other factors are taken into account.

Frictional heat

The Frictional Heat developed per second within sliding contact is :-

$$Pf = f.p.v.A(\text{Watt})$$

Where:-

f = coefficient of friction

v = speed (m/sec.)

p = load (N/mm²)

A = dynamic contact area (mm²)

Frictional Loss

Typical examples of the frictional loss of a Hydraulic Cylinder at various pressures is as follows :-
100mm Ø Piston (fitted with **DPW** style seal), **60 mm Ø Rod**, **0.1 m/sec.** speed

Within the range 50 - 200 bar the loss attributable to the **DPW** seal is fairly constant at around 0.8% of the theoretical pulling power of the cylinder. The loss attributable to the rod seals is as follows :-

| <u>Rod seal</u> | <u>Pressure</u> | <u>Frictional Loss</u> |
|------------------|-----------------|------------------------|
| Style CPI | 200 bar | 180 Kg |
| | 150 bar | 120 Kg |
| | 50 bar | 75 Kg |
| Style CPU | 200 bar | 280 Kg |
| Style CS6 | 200 bar | 130 Kg |

| <u>Style</u> | <u>Frictional Loss</u> |
|--------------|------------------------|
| CPI | 1% |
| CPU | 2% |
| CS6 | 0.5% |

From this example it can be seen that the **CS6** Style **Composite Seals** have distinct advantages over conventional lip seals in terms of frictional loss.

Fluid Transport

It must be emphasised that Composite Seals do not give as dry a rod as conventional Lip-Seals operating within their optimum conditions.

The fitting of two single-acting Composite Seals in tandem or the use of a double-acting wiper seal Style 941 will significantly contribute towards ultimate performance.

From a practical point of view an absolutely dry rod cannot be achieved without an increase in friction causing a considerable reduction in seal life. For any seal type, oil transport is essential but also variable dependant upon the velocity, viscosity of the oil and the surface finish of the contact surfaces.

Careful seal design, particularly in relation to the contact area profile, optimises the amount of oil that is transported back to the pressure side on the return stroke..

Surface Finish

Surface finish is an influencing factor on the performance of a seal. For **Composite Seals**, Cylinder bores and Rods should have a surface finish between 0.1 - 0.4µm Ra.

Within the housing, static sealing surfaces should have a finish better than 0.8µm Ra.

Even after prolonged use, Bronze Filled PTFE will not have any significant effect on surface finish values.

Carbon and Glass filled PTFE are more abrasive and will slightly reduce the surface roughness.

Surface finish can be affected by the use of hard bearing materials such as Meehanite, Phosphor-Bronze or Polyester-Fabric.

It is generally recommended that **PTFE Bearing Tape** should be used with **Composite Seals**.

The optimum values of surface roughness for various seal types is shown in the previous section.

Bearing Material

P.T.F.E. Bearing Tape is specifically designed for use with P.T.F.E. Composite Seals. The nature of P.T.F.E. allows for a manufactured size giving a tighter fit than 'harder' materials such as Phosphor-Bronze, Meehanite or Polyester Fabric. This reduction in radial clearance gives a marginal improvement to the pressure capability of the seal but, more importantly, protects the seal from contaminant particles within the system. A combination of the design of the bearing and the characteristics of P.T.F.E. allow the particles to become embedded in the P.T.F.E. on the non-working face, thus also protecting the steel counterface from scoring.

During use, bearing materials wear, causing debris and contamination of the fluid. Extensive tests have shown that particulate contamination >15µm within the fluid, increases with the use of Phosphor-Bronze or Meehanite, and tends to decrease with the use of P.T.F.E. The harder debris created by these bearings also has a greater effect upon seal performance. Particulate contamination in the fluid surrounding the seal can be over 100 times that in the main system due to the bearing preventing flushing of the seal space. Increased contamination in this area will increase the probability of a large enough particle gaining access to the seal interface, causing damage and leakage.

Appendix -2- MATERIAL PROPERTIES, COMPATIBILITY AND STORAGE

Compound Suitability For Fluids Gases & Chemicals

The following data and information has been derived from many sources but should be regarded as a general guide only. Consideration of compound selection for any given application should be in association with pressure, temperature and media requirements.

Key To Symbols

| | |
|------------|--------------------|
| AU | Polyurethane |
| EPM | Ethylene Propylene |
| FKM | Fluorocarbon |
| IIR | Butyl |
| VMQ | Silicone |
| NBR | Medium Nitrile |

Key To Rating Guide

| | |
|----------|----------------|
| A | Satisfactory |
| B | Fair |
| C | Doubtful |
| D | Unsatisfactory |
| - | No Data |

| <i>Immersion Medium</i> | AU | EPDM | FKM | IIR | VMQ | NBR | <i>Immersion Medium</i> | AU | EPDM | FKM | IIR | VMQ | NBR |
|-------------------------|----|------|-----|-----|-----|-----|------------------------------|----|------|-----|-----|-----|-----|
| Acetaldehyde | - | - | D | A | A | D | Diethyl Sebacate | D | D | C | C | C | D |
| Acetic Acid Gas at 70°C | C | - | D | B | B | D | Diocetyl Phthalate | D | D | B | C | A | D |
| Acetic Acid Glacial | D | - | D | A | A | D | Dioxane | D | A | D | A | D | D |
| Acetic Acid Diluted | B | A | D | A | A | D | Dipentene | C | D | A | D | C | B |
| Acetone | D | A | D | A | C | D | Diphenyl | C | D | C | D | C | D |
| Acetylene | D | A | A | A | B | A | Epichlorohydrin | - | B | D | - | - | D |
| Acrylonitrile | D | D | D | B | B | D | Ethylene | - | - | A | - | - | |
| Air | A | A | A | A | A | A | Ethylacetate | D | B | D | A | D | D |
| Air at 180°C | D | D | A | D | A | D | Ethyl Alcohol | A | A | A | A | A | A |
| Air With Oil Mist | A | D | A | D | A | A | Ethyl Benzene | C | D | B | D | D | D |
| Ammonia | D | A | D | A | D | B | Ethylene Oxide at -20°C | D | A | D | B | C | D |
| Ammonium Hydroxide | D | A | B | A | B | B | Ethylene Glycol | D | A | A | A | A | A |
| Aniline | D | D | A | B | B | D | Fatty Acids | A | D | A | D | B | B |
| Asphalt | C | D | A | D | B | D | Ferric Chloride | C | A | A | A | C | A |
| Beer | A | A | A | A | A | A | Ferric Sulphate | C | A | A | A | B | A |
| Benzene/Benzol | D | D | A | D | D | D | Fluorine (Gas) | D | D | A | C | D | D |
| Benzaldehyde | C | B | C | B | B | D | Fluorobenzene | D | D | A | D | D | D |
| Blast Furnace Gas | C | C | A | C | A | B | Formaldehyde | D | A | A | A | C | A |
| Brake Fluid veg. | D | A | D | A | C | D | Formic Acid | D | B | D | B | C | D |
| Bromine Water | D | D | A | D | D | D | Freon 11 | B | B | B | D | C | B |
| Bunker Oil | C | D | A | D | B | A | Freon 12 | A | - | A | A | D | B |
| Butane | B | D | A | D | D | A | Freon 21 | C | D | D | C | D | D |
| Calcium Hydroxide | D | A | A | A | A | A | Freon 22 | D | D | D | A | D | D |
| Calcium Hypochlorite | D | A | A | C | C | A | Freon 113 | A | D | B | D | C | B |
| Carbolic Acid (phenol) | D | D | B | C | D | D | Freon 114 | C | - | B | A | C | A |
| Carbon Bisulphide | D | D | A | D | D | D | Furan | D | C | D | C | C | D |
| Carbon Dioxide | D | A | A | A | A | A | Furfural | D | D | D | C | B | D |
| Carbon Monoxide at 70°C | C | A | B | A | A | B | Gasoline U.S. spec | B | D | A | D | D | B |
| Castor Oil | B | B | C | B | A | D | Glucose | D | A | A | A | A | A |
| Chlorine | C | A | B | C | D | D | Glycerine | D | A | A | A | A | A |
| Chlorinated Solvents | D | D | A | D | D | D | Glycols | D | A | A | A | A | A |
| Copper Sulphate | D | A | A | A | C | A | Hexane | A | D | A | D | B | A |
| Cotton Seed Oil | A | D | A | D | C | A | Hydrazine | B | A | A | A | D | B |
| Creosote | C | D | A | D | D | D | Hydrochloric Acid diluted | D | A | A | A | A | A |
| Cyclohexane | A | D | A | D | D | D | Hydrochloric Acid (dil) 70°C | D | A | A | A | D | D |
| Diacetone Alcohol | C | A | C | A | C | D | Hydrochloric Acid conc. | D | B | B | A | B | A |
| Dibutyl Phthalate | A | C | B | C | A | D | Hydrogen | A | A | A | A | A | A |
| Dichlorobenzene | C | D | A | D | D | D | Hydrogen Peroxide | D | A | A | A | A | A |
| Diethylene Glycol | A | A | A | A | B | A | Linseed Oil | B | D | A | A | D | A |
| Diethyl Ether | D | B | D | B | D | D | Lubricating Oil | B | D | A | D | B | A |

Compound Suitability For Fluids Gases & Chemicals

The following data and information has been derived from many sources but should be regarded as a general guide only. Consideration of compound selection for any given application should be in association with pressure, temperature and media requirements.

Key To Symbols

| | |
|------------|--------------------|
| AU | Polyurethane |
| EPM | Ethylene Propylene |
| FKM | Flouorocarbon |
| IIR | Butyl |
| VMQ | Silicone |
| NBR | Medium Nitrile |

Key To Rating Guide

| | |
|----------|----------------|
| A | Satisfactory |
| B | Fair |
| C | Doubtful |
| D | Unsatisfactory |
| - | No Data |

| <i>Immersion Medium</i> | AU | EPDM | FKM | IIR | VMQ | NBR | <i>Immersion Medium</i> | AU | EPDM | FKM | IIR | VMQ | NBR |
|---------------------------|----|------|-----|-----|-----|-----|-------------------------|----|------|-----|-----|-----|-----|
| Mercuric Chloride | D | A | A | A | A | A | Sewage | C | A | A | A | A | A |
| Mercury | A | A | A | A | A | A | Silicone Oils & Greases | A | A | A | A | A | A |
| Methyl Chloride | D | D | A | D | D | C | Silver Nitrate | D | A | A | A | A | A |
| Methyl Ethyl Ketone | D | B | D | B | A | D | Soap Solution | A | A | A | A | C | A |
| Methylene Dichloride | D | D | B | D | D | D | Sodium Salts | D | A | A | A | C | A |
| Milk | A | A | A | A | A | A | Steam below 120°C | D | A | B | A | A | D |
| Mineral Oil | A | D | A | D | A | A | Steam above 120°C | D | A | B | B | B | D |
| Naphtha | C | D | A | D | C | B | Stearic Acid | C | B | A | B | C | A |
| Naphthalene | B | D | A | D | C | D | Styrene | D | D | B | D | D | D |
| Natural Gas | A | B | A | D | B | A | Sulphur Chloride | D | D | D | D | D | D |
| Nitric Acid concentrated | D | D | B | D | D | D | Sulphur Dioxide dry | D | A | A | A | D | D |
| Nitric Acid diluted | D | B | A | B | B | C | Sulphur Acid diluted | D | A | A | A | A | D |
| Nitro Benzene | D | D | B | C | C | D | Sulphuric Acid conc. | D | B | A | B | D | D |
| Nitro Propane | D | B | D | B | C | D | Sulphuric Acid Fuming | D | D | B | D | D | D |
| Nitrogen | A | A | A | A | A | A | Tar | D | D | A | D | D | D |
| Oleic Acid | D | D | A | D | B | A | Terpinol | D | D | A | D | D | B |
| Oxygen at -40°C | B | A | A | B | A | B | Toluene | D | D | A | D | D | D |
| Oxygen at 200°C | C | B | B | D | A | D | Transformer Oil | C | D | A | D | D | B |
| Ozone | C | B | B | B | A | D | Trichlorethylene triad | D | D | A | D | D | D |
| Palmitic Acid | D | C | A | C | D | A | Turpentine | D | D | A | D | D | A |
| Paraffin | D | D | A | D | D | A | Vaseline | D | B | A | D | D | A |
| Petroleum Oils | A | D | A | D | B | A | Vegetable Oil | B | C | A | B | D | B |
| Phenol | D | D | B | D | D | D | Vinegar | C | A | D | A | D | D |
| Phenyl Benzene | D | C | A | D | D | D | Wines & Spirits | D | A | A | A | A | A |
| Phenyl Ethyl Ether | D | C | D | D | D | D | Xylene | D | D | A | D | D | D |
| Phenyl Hydrazine | D | D | A | C | D | D | Zinc Salts | D | A | A | A | D | A |
| Phorone | - | - | - | A | A | D | | | | | | | |
| Phosphoric Acid 45% | D | A | A | A | D | B | | | | | | | |
| Phosphoric Acid 45%170°C | D | A | A | A | D | B | | | | | | | |
| Picric Acid diluted | D | A | A | A | D | A | | | | | | | |
| Piperdine | D | C | D | C | D | D | | | | | | | |
| Plating Solution (Chrome) | D | - | C | - | C | D | | | | | | | |
| Plating Solution (Others) | C | - | A | A | C | A | | | | | | | |
| Potassium Hydroxide | D | A | A | A | D | B | | | | | | | |
| Producer Gas | C | A | A | A | A | A | | | | | | | |
| Propane Gas | B | D | A | D | C | A | | | | | | | |
| Propylene | - | - | A | D | - | B | | | | | | | |
| Pyridine | D | B | D | B | D | D | | | | | | | |
| Pyrrole | - | C | - | D | - | D | | | | | | | |
| Sal-Ammoniac | C | A | - | A | B | A | | | | | | | |

Seal Selection Materials - Plastic Faced Seals

The following tables are designed as a guide to the correct selection of the sealing element and energiser materials for your particular application. The sealing element is dynamic making it's mechanical properties the priority in selection. More detailed capabilities relevant to individual seal types are given within the catalogue.

The static energisers are rubber based compounds therefore fluid compatibility and temperature range are the main criteria for selection.

Materials For Sealing Element

| Material suffix | Description | Colour | Material Properties & Application |
|-----------------|-----------------------------------|------------------|--|
| B | Bronze PTFE with additives | Brown | Very high mechanical duties. Good compressive strength for oil hydraulics. (Standard Material for styles CS5, 841, 851, CS6, 751 & 741) |
| C | Carbon PTFE | Black | Medium Mechanical duties. Generally for pneumatic applications and water based fluids (Not Seawater). For soft mating surfaces and unlubricated conditions. |
| G | Glass PTFE | Black | High mechanical duties. For water and oil hydraulics, pneumatics and unlubricated applications. |
| V | Virgin PTFE | White | Light mechanical duties. For anti-extrusion rings and pressure seals. Low friction and almost totally inert. Suitable for food and potable water applications. (NWC approved) Standard material for anti-extrusion rings, CS1, CS2, CS4 |
| VM | Modified PTFE | Blue | Medium mechanical duties. Much lower wear rate than Virgin PTFE. Very good chemical resistance Standard material for styles 931, 941, 951 |
| UH | UHMWPE | Off White | Medium mechanical duties. For water and oil hydraulics, pneumatics, and unlubricated applications. Lower temperature and speed range than PTFE but very good abrasion resistance. Suitable for soft mating surfaces. |

Materials For Energiser

| Compound | Temp Range (Intermittant) °C | Recommended For | NOT Recommended For |
|--|------------------------------|---|--|
| NBR Nitrile (Standard Material) | -40 to +120 | Petroleum based oils and fluids, cold water, Silicone greases and oils, ethylene glycol based fluids, Di-ester based lubricants. | Automotive brake fluid, Phosphate ester fluids. |
| EPM, EPDM Ethylene Propylene | -50 to +150 | Phosphate ester based fluids, Automotive brake fluid, Water, Steam. | Petroleum based oils and fluids, Di-ester based lubricants. |
| IIR Butyl | -40 to +150 | Phosphate ester fluids, Silicone greases and fluids. | Petroleum based oils and fluids, Di-ester based lubricants. |
| FKM Fluorocarbon | -50 to +200 | Petroleum oils, Di-ester based lubricants, Silicate ester lubricants, Silicone greases & fluids, Certain phosphate ester fluids. | Skydrol Fluids, Low molecular weight esters & ethers. |
| Si Silicone | -90 to +240 | High analine point oils, Chlorinated di-phenyls, Dry heat. | Most petroleum based fluids, Water and steam. |

Note: If Energiser Materials Other Than Nitrile Are Required, Consult CLARON For Part Number.

Storage:

Deterioration of rubber products will be minimised if stored in accordance with BS 3574:1989
P.T.F.E. is regarded as having no restrictions in terms of shelf life.

Compound Suitability For Hydraulic Fluids

| DIN Class | ISO Class | Type | Description | Continuous Operating Temp. °C with Seal Materials | | | | | | |
|-----------|-----------|-------------------------------|---|---|-----|-----|------|-----|------|-----|
| | | | | NBR | FKM | AU | EPDM | POM | PTFE | PA |
| H | HH | Mineral Fluid | Mineral Oil without additives | 100 | 150 | 100 | NS | 100 | 200 | 120 |
| H-L | HL | | Mineral Fluid with anti-corrosion and anti-ageing additives | 100 | 150 | 100 | NS | 100 | 200 | 120 |
| H-LP | HM | | As HL plus additives reducing wear, and raising load capacity | 100 | 150 | 100 | NS | 100 | 200 | 120 |
| H-LPD | - | | As H-LP but with detergents and dispersants | 100 | 150 | 100 | NS | 100 | 200 | 120 |
| H-V | HV | | As H-LP but with improved viscosity temperature behaviour | 100 | 150 | 100 | NS | 100 | 200 | 120 |
| HFA E | | Flame Retardent with Water | Emulsions of mineral oil in water. Water content 80-95% | 55 | 60 | 40 | NS | 55 | 55 | 55 |
| HFA S | | | Synthetic oil in water Water content 80-95% | 55 | 60 | 40 | NS | 55 | 55 | 55 |
| HFB | | | Emulsions of water in mineral oil.. Water content 40% | 60 | 60 | 40 | NS | 60 | 60 | 60 |
| HFC | | | Aqueous polymer solutions. Water content 35% | 60 | 60 | NS | 60 | 60 | 60 | 60 |
| HFD R | | Flame Retardent without Water | Phosphoric acid ester based | NS | 150 | NS | 120 | 80 | 150 | 80 |
| HFD S | | | Chlorinated hydrocarbon based | NS | 150 | NS | 120 | 80 | 150 | 80 |
| HFD T | | | Mixtures of HFD R and HFD S | NS | 150 | NS | 120 | 80 | 150 | 80 |
| HEPG | | Biodegradable | Polyglycol based | NS | 100 | NS | 120 | 80 | 150 | 80 |
| HETG | | | Vegetable Oil basec | 60 | 60 | 60 | NS | 60 | 60 | 60 |
| HEES | | | Fully synthetic ester based | NS | 100 | 60 | NS | 100 | 100 | 100 |

NS = Not Suitable

Storage and Packaging of Rubber and Plastic products

Packaging

The requirements of packaging form an integral part of storage procedures as well as providing accurate identification. With the exception of Silicone Rubbers which may deteriorate if totally enclosed, all vulcanized rubbers should be sealed or wrapped to avoid the free access of air.

The packaging materials should preferably be opaque and free from such substances as copper naphthenates, creosote preservatives or any film containing plasticizer.

The product should be packaged in such a manner as to avoid distortion.

Some suitable materials are:-

Polyethylene coated Kraft paper, aluminium foil / paper / polyethylene laminate and opaque polyethylene film.

Storage

- 1) **Temperature.** The storage temperature should be maintained below 25°C, however below 15°C extra care should be taken to avoid distortion.
- 2) **Humidity.** The relative humidity shall be less than 65 % r.h and such that, given the variations in temperature, condensation is avoided.
- 3) **Light.** Protect from light sources, particularly direct sunlight and intense artificial light with high U.V
- 4) **Radiation.** Protect from all sources of ionizing radiation (refer to BS3664, BS4094 and BS4513)
- 5) **Ozone.** Protect from ozone and avoid organic vapour, combustion gases, mercury vapour lamps and any high voltage electrical equipment which may generate ozone in the storage area.
- 6) **Deformation.** Articles should be stored in strain-free conditions to avoid permanent deformation of the article or indentations on the sealing surfaces. Rings of large diameter, such as O-Rings may be stored by forming into three loops to avoid creasing or twisting.
- 7) **Contact with fluids.** Articles must be stored free from contaminants such as petrol, grease, acids and cleaning fluids or their vapours.

Correct packaging of the stored articles will avoid many of the problems associated with unavoidable environmental conditions and rotation of stocks will keep these harmful effects to a minimum.

Shelf Life Control

All articles with a limitation to their Shelf Life are marked by Claron with a cure date/batch date on the packaging. All Claron cure dates are traceable through the batch number for a minimum period of 10 years

All Claron materials with a restriction to their shelf life fall into three basic groups, A, B and C.

A fourth group, U, is designated as being of unlimited shelf life if stored in accordance with these packaging and storage requirements.

Each group has an initial period of safe storage followed by further storage periods after re-inspection and assessment.

PERIODIC INSPECTION CRITERIA

Before any component is stored for any extension period or further extension period, the following inspection criteria is mandatory

Visual inspection - Inspection of the items or components in a representative sample for

- a) Permanent distortion, mechanical damage, flats or other defects
- b) Tackiness or noticeable surface softening or hardening
- c) Cracks (Extend or flex the material and check with a 10x magnifier)

If any of the above are found, the product must be removed from stock and destroyed.

Testing - Providing that the representative items or components inspected are satisfactory then the products shall be tested to ascertain that their performance characteristics are maintained

All initial Shelf Life dates are calculated from the Cure Date / Batch Date and are categorised as follows for unassembled products:-

GROUP A Initial period 5 years , possible extension periods every 2 years

Natural (NR)
Polyisoprene (IR)
Polyurethane (AU)
Styrene-Butadiene (SBR)

GROUP B Initial period 7 years , possible extension periods every 3 years

Acrylonitrile-Butadiene (Nitrile) (NBR)
Blends of Acrylonitrile-Butadiene and Polyvinylchloride (PVC)
Epichlorohydrin (CO)
Polyacrylate (ACM)
Polychloroprene (Neoprene) (CR)
Polyisobutylene-Isoprene (Butyl) (IIR)

GROUP C Initial period 10 years , possible extension periods every 5 years

Chlorosulphonated Polyethylene (eg. Hypalon®) (CSM)
Ethylene Propylene (EPM)
Terpolymer of Ethylene Propylene (EPDM)
Fluoroelastomer (eg. Viton®) (FKM)
Silicone (SI)

GROUP U Unlimited Storage period if packaged and stored in accordance with these requirements and the further detail recorded in BS 3574 :1989

Polyoxymethylene or Polyacetal (POM)
Polyester Elastomer (eg.Hytrel®) (TEEE)
Polyamide (eg.Nylon) (PA 66)
Polytetrafluoroethylene (PTFE)
(Consult Claron for storage conditions relative to etched PTFE)
Polyetheretherketone (PEEK™)
Ultra-High Molecular Weight Polyethylene (UHMWPE)
Phenolic Resin (SRBF)

GENERAL NOTES

When stored under low temperature conditions, stiffening of the material must be expected, heat soaking at a temperature higher than ambient for several hours will return the material to a normal state. No materials should be inspected in the cold stiff state. Do not use ovens or hot water to achieve this condition. The appearance of a "Bloom" is unimportant and is no evidence of degradation. Records of Shelf Life Extensions should be kept in a register and a new Shelf Life Expiry Date recorded.

Appendix ~~3~~ SEAL INSTALLATION

Seal Installation

SEAL ASSEMBLY

Careful fitting and assembling of the seals will assist in preventing seal failure. The following check list is advisable


- Ensure all metal parts are clean and free from contamination.
- Check that the seal housing is free of sharp edges and burrs.
- Where seals are to pass over threads, undercuts, etc. some form of protective sleeve should be used.
- Ensure that the seal is the correct type, part number, and size as that specified.
- When fitting single-acting seals particularly make certain that the pressure side of the seal is installed correctly.
- Check that lead in chamfers available.
- Oil the seal and surrounding metal components before fitting.
- Certain seal types may require appropriate fitting tools to assist in damage free assembly.

Composite Seal Installation


Composite Seals can be assembled easily onto one piece pistons and into internal grooves. The material will stretch, deform and compress to allow assembly and will return to its original dimension after a period of time. If this period is unacceptable the ring can be reverted to its original size immediately by exerting a force opposite to that used to assemble in the first instance. This reversal of strain can be carried out many times with no deterioration of the material properties.

Assembly can be carried out in many ways and we show some suggestions for tools to facilitate the simplest assembly. It is recommended that the tools should be made from plastic material (POM, PA, P.V.C., etc.) to reduce the risk of any damage to the seal.


Piston Seal Assembly

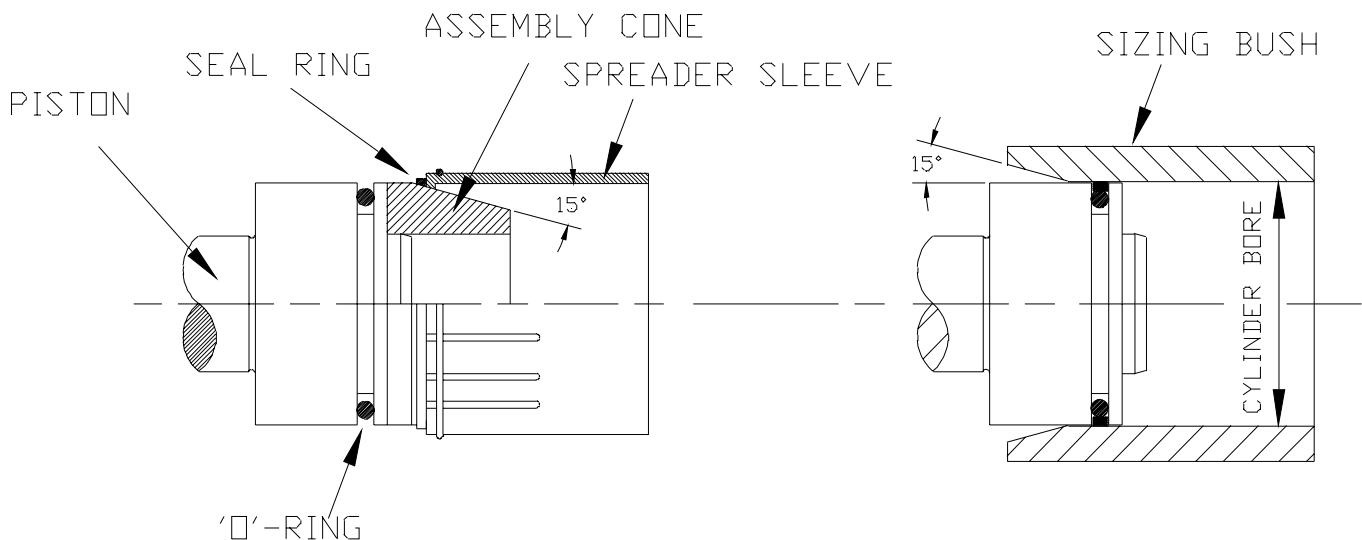

Rod Seal Assembly

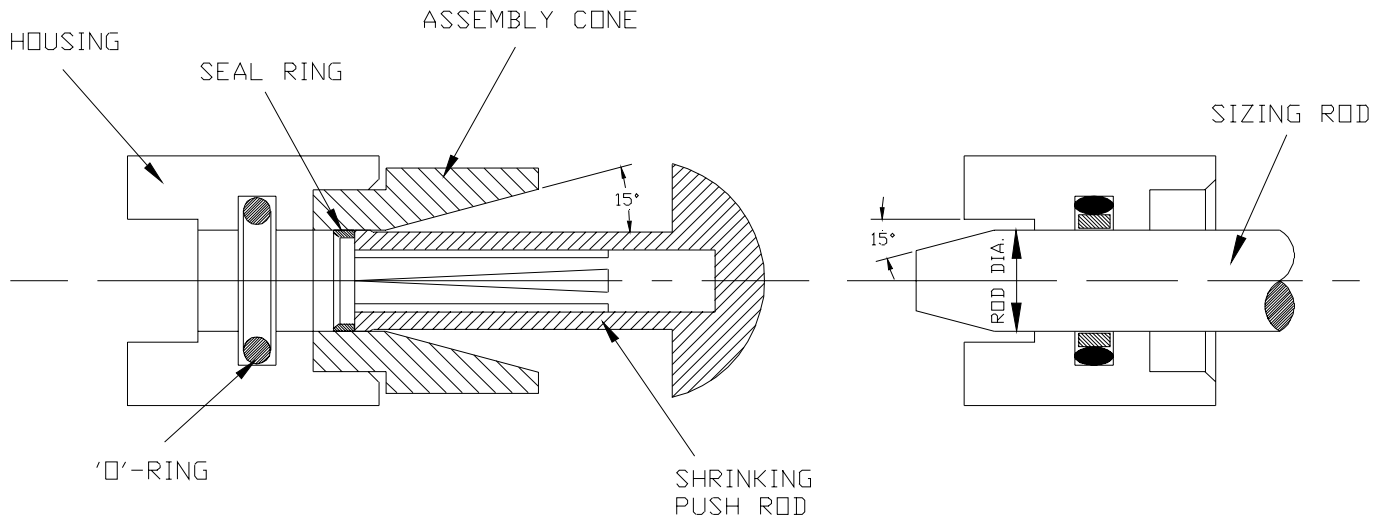

Small Diameters Or Deep Bores

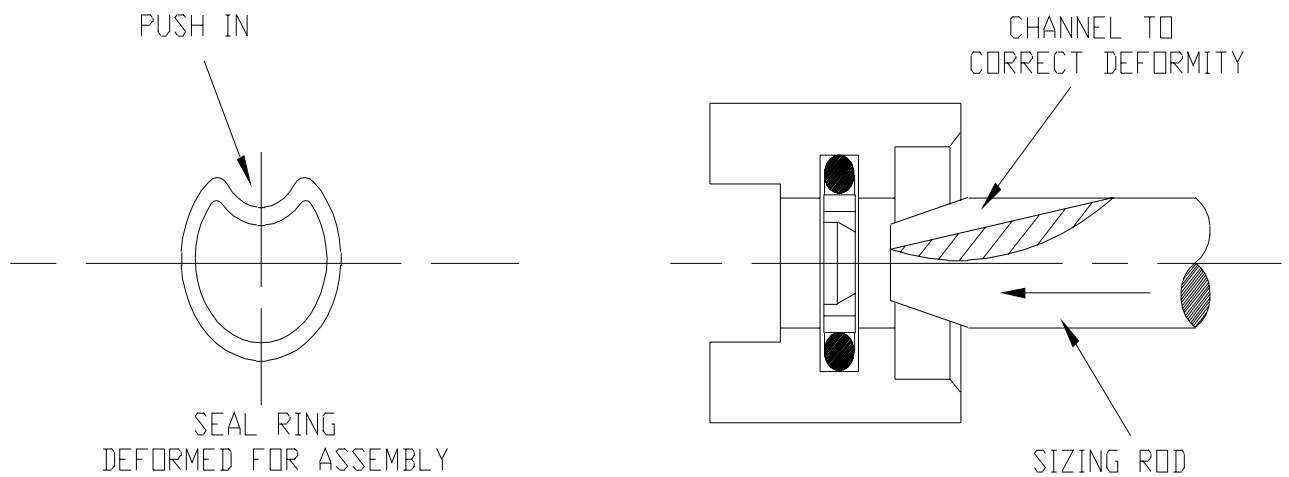

Larger Diameters

Appendix - 4 - TOLERANCE TABLES

Specified Tolerances

| Imperial | Nominal Sizes inch | | SHAFTS (outside diameters) units 0.001 inch | | | | | | | | BORES (inside diameters) units 0.001 inch | | | | | |
|----------|--------------------|-------|---|--------------|--------------|-----------|-----------|-----------|------------|--------------|---|-----------|-----------|-----------|------------|--------------|
| | over | to | e9 | f8 | f9 | h8 | h9 | h10 | h11 | js10 | js11 | H8 | H9 | H10 | H11 | Js11 |
| | 0.04 | 0.12 | -0.6 -1.6 | -0.3 -0.9 | -0.3 -1.2 | 0 -0.6 | 0 -1.0 | 0 -1.6 | 0 -2.5 | +0.8 -0.8 | +1.3 -1.3 | +0.6 0 | +1.0 0 | +1.6 0 | +2.5 0 | +1.3 -1.3 |
| | 0.12 | 0.24 | -0.8 -2.0 | -0.4 -1.1 | -0.4 -1.6 | 0 -0.7 | 0 -1.2 | 0 -1.8 | 0 -3.0 | +0.9 -0.9 | +1.5 -1.5 | +0.7 0 | +1.2 0 | +1.8 0 | +3.0 0 | +1.5 -1.5 |
| | 0.24 | 0.40 | -1.0 -2.4 | -0.5 -1.4 | -0.5 -1.9 | 0 -0.9 | 0 -1.4 | 0 -2.2 | 0 -3.5 | +1.1 -1.1 | +1.8 -1.8 | +0.9 0 | +1.4 0 | +2.2 0 | +3.5 0 | +1.8 -1.8 |
| | 0.40 | 0.71 | -1.2 -2.8 | -0.6 -1.6 | -0.6 -2.3 | 0 -1.0 | 0 -1.6 | 0 -2.8 | 0 -4.0 | +1.4 -1.4 | +2.0 -2.0 | +1.0 0 | +1.6 0 | +2.8 0 | +4.0 0 | +2.0 -2.0 |
| | 0.71 | 1.19 | -1.6 -3.6 | -0.8 -2.0 | -0.8 -2.8 | 0 -1.2 | 0 -2.0 | 0 -3.5 | 0 -5.0 | +1.8 -1.8 | +2.5 -2.5 | +1.2 0 | +2.0 0 | +3.5 0 | +5.0 0 | +2.5 -2.5 |
| | 1.19 | 1.97 | -2.0 -4.5 | -1.0 -2.6 | -1.0 -3.4 | 0 -1.6 | 0 -2.5 | 0 -4.0 | 0 -6.0 | +2.0 -2.0 | +3.0 -3.0 | +1.6 0 | +2.5 0 | +4.0 0 | +6.0 0 | +3.0 -3.0 |
| | 1.97 | 3.15 | -2.5 -5.5 | -1.2 -3.0 | -1.2 -4.1 | 0 -1.8 | 0 -3.0 | 0 -4.5 | 0 -7.0 | +2.3 -2.3 | +3.5 -3.5 | +1.8 0 | +3.0 0 | +4.5 0 | +7.0 0 | +3.5 -3.5 |
| | 3.15 | 4.73 | -3.0 -6.5 | -1.4 -3.6 | -1.4 -4.8 | 0 -2.2 | 0 -3.5 | 0 -5.0 | 0 -9.0 | +2.5 -2.5 | +4.5 -4.5 | +2.2 0 | +3.5 0 | +5.0 0 | +9.0 0 | +4.5 -4.5 |
| | 4.73 | 7.09 | -3.5 -7.5 | -1.6 -4.1 | -1.6 -5.6 | 0 -2.5 | 0 -4.0 | 0 -6.0 | 0 -10.0 | +3.0 -3.0 | +5.0 -5.0 | +2.5 0 | +4.0 0 | +6.0 0 | +10.0 0 | +5.0 -5.0 |
| | 7.09 | 9.85 | -4.0 -8.5 | -2.0 -4.8 | -2.0 -6.5 | 0 -2.8 | 0 -4.5 | 0 -7.0 | 0 -12.0 | +3.5 -3.5 | +6.0 -6.0 | +2.8 0 | +4.5 0 | +7.0 0 | +12.0 0 | +6.0 -6.0 |
| | 9.85 | 12.41 | -4.5 -9.5 | -2.2 -5.2 | -2.2 -7.3 | 0 -3.0 | 0 -5.0 | 0 -8.0 | 0 -12.0 | +4.0 -4.0 | +6.0 -6.0 | +3.0 0 | +5.0 0 | +8.0 0 | +12.0 0 | +6.0 -6.0 |

Tolerances extracted from BS1916 with kind permission of British Standards Institution.

| Metric | Nominal Sizes mm | | SHAFTS (outside diameters) units 0.001 mm | | | | | | | | BORES (inside diameters) units 0.001 mm | | | | | |
|--------|------------------|-----|---|-------------|-------------|----------|-----------|-----------|-----------|--------------|---|----------|-----------|-----------|-----------|----------------|
| | over | to | e9 | f8 | f9 | h8 | h9 | h10 | h11 | js10 | js11 | H8 | H9 | H10 | H11 | Js11 |
| | 1.6 | 3 | -14 -39 | -6 -20 | -6 -31 | 0 -14 | 0 -25 | 0 -40 | 0 -60 | +20 -20 | +30 -30 | +14 0 | +25 0 | +40 0 | +60 0 | +30 -30 |
| | 3 | 6 | -20 -50 | -10 -28 | -10 -40 | 0 -18 | 0 -30 | 0 -48 | 0 -75 | +24 -24 | +37.5 -37.5 | +18 0 | +30 0 | +48 0 | +75 0 | +37.5 -37.5 |
| | 6 | 10 | -25 -61 | -13 -35 | -13 -49 | 0 -22 | 0 -36 | 0 -58 | 0 -90 | +29 -29 | +45 -45 | +22 0 | +36 0 | +58 0 | +90 0 | +45 -45 |
| | 10 | 18 | -32 -75 | -16 -43 | -16 -59 | 0 -27 | 0 -43 | 0 -70 | 0 -110 | +35 -35 | +55 -55 | +27 0 | +43 0 | +70 0 | +110 0 | +55 -55 |
| | 18 | 30 | -40 -92 | -20 -53 | -20 -72 | 0 -33 | 0 -52 | 0 -84 | 0 -130 | +42 -42 | +65 -65 | +33 0 | +52 0 | +84 0 | +130 0 | +65 -65 |
| | 30 | 50 | -50 -112 | -25 -64 | -25 -87 | 0 -39 | 0 -62 | 0 -100 | 0 -160 | +50 -50 | +80 -80 | +39 0 | +62 0 | +100 0 | +160 0 | +80 -80 |
| | 50 | 80 | -60 -134 | -30 -76 | -30 -104 | 0 -46 | 0 -74 | 0 -120 | 0 -190 | +60 -60 | +95 -95 | +46 0 | +74 0 | +120 0 | +190 0 | +95 -95 |
| | 80 | 120 | -72 -159 | -36 -90 | -36 -123 | 0 -54 | 0 -87 | 0 -140 | 0 -220 | +70 -70 | +110 -110 | +54 0 | +87 0 | +140 0 | +220 0 | +110 -110 |
| | 120 | 180 | -85 -185 | -43 -106 | -43 -143 | 0 -63 | 0 -100 | 0 -160 | 0 -250 | +80 -80 | +125 -125 | +63 0 | +100 0 | +160 0 | +250 0 | +125 -125 |
| | 180 | 250 | -100 -215 | -50 -122 | -50 -165 | 0 -72 | 0 -115 | 0 -185 | 0 -290 | +92 -92 | +145 -145 | +72 0 | +115 0 | +185 0 | +290 0 | +145 -145 |
| | 250 | 315 | -110 -240 | -56 -137 | -56 -186 | 0 -81 | 0 -130 | 0 -210 | 0 -320 | +105 -105 | +160 -160 | +81 0 | +130 0 | +210 0 | +320 0 | +160 -160 |
| | 315 | 400 | -125 -265 | -62 -151 | -62 -212 | 0 -89 | 0 -140 | 0 -230 | 0 -360 | +115 -115 | +180 -180 | +89 0 | +140 0 | +230 0 | +360 0 | +180 -180 |

Tolerances extracted from BS4500 (ISO286) with kind permission of British Standards Institution.

Appendix ~~5~~
TERMS & CONDITIONS of SALE
HEALTH & SAFETY

CONDITIONS OF SALE

for

Claron Hydraulic Seals Ltd**Claron Hydraulic Services****Claron (Plastics) Ltd****1. DEFINITIONS**

1.1 These conditions of sale shall apply to all orders given to and accepted by Claron Hydraulic Services or Claron Hydraulic Seals Ltd or Claron (Plastics) Ltd. In these conditions "the seller" means Claron Hydraulic Services or Claron Hydraulic Seals Ltd or Claron (Plastics) Ltd. "the buyer" means the person, firm or company purchasing the Goods, "the Goods" means the goods or materials which shall be the subject of the contract.

2. INCORPORATION OF CONDITIONS OF SALE

2.1 These terms and conditions are the only ones to which the contract for the sale or supply of the Goods by the Seller to the Buyer is subject. Any other conditions proposed or stipulated by the Buyer in whatever form, written or oral, are hereby expressly waived and excluded. These terms and conditions may not be varied except by the written consent of a duly authorised representative of the Seller. An acceptance of the Seller's quotation for the sale or supply of the goods or of the delivery of the Goods implies an unconditional acceptance of these terms and conditions.

3. PRICES

3.1 An order given by the Buyer is not binding on the Seller until accepted by the Seller in writing.

3.2 The Goods will be charged at the price ruling at the date of delivery, and will be subject to Value Added Tax. This is irrespective of any quotation given prior to that date, or of any price charged for similar goods previously delivered unless the sale is specifically stated in writing by the Seller to be at a fixed price or the quotation was in writing and stated to be open for a fixed period and an order was accepted by the Seller within that fixed period.

3.3 The prices quoted or charged exclude carriage and packing costs.

4. PAYMENT

4.1 Payment is due not later than the last day of the month following the date of the Seller's invoice to the Buyer, or before if required by the Seller.

4.2 If any payments due to the Seller are not made on the due date(s), the Seller reserves the right to suspend any or all deliveries of goods ordered by the Buyer and /or, by notice in writing to the Buyer, cancel the contract without being liable for any consequential loss.

4.3 The Seller reserves the right to charge the Buyer interest on any sum outstanding beyond the period of credit allowed at the rate of 2% per month or part of a month.

4.4 Accounts are strictly net and remittances by cheque, which should be accompanied by the remittance advice, are to be made payable to the Seller and sent to the sellers registered address.

4.5 No allowance will be made at settlement unless previously acknowledged by the Seller's official Credit Note.

4.6 Under no circumstances shall the Buyer withhold payment of any amount due to the Seller because of a disputed claim of any nature nor shall the Buyer be entitled to claim a right of set off, claim or counterclaim in respect of any of the Seller's obligations arising in respect of matters other than this contract.

5. DELIVERY

5.1 The time for delivery shall not be of the essence of the contract. The Seller shall not be liable for any loss or damage whether arising directly or indirectly from delay in delivery.

5.2 Delivery of the Goods shall take place:-

5.2.1 where the Seller undertakes delivery of the Goods, when they are loaded off the Seller's vehicle, ship or other transport at the station, port or address specified by the Buyer;

5.2.2 where the Buyer undertakes to collect the Goods, when they are loaded on the Buyer's vehicle or other transport at the address of the Seller or the address of any storage or warehouse facility used by the Seller for storage of goods.

5.3.1 The buyer shall be deemed to have examined the Goods at the time of delivery unless notice of any loss or damage in transit is given by the Buyer and received by the Seller with 5 days after delivery the Seller shall be relieved and discharged from all liability in respect thereof.

5.3.2 The Seller's liability in the case of loss or damage in transit shall be limited to repairing or replacing the damaged Goods or, as the case may be, the lost Goods and the Seller shall not be under any other liability whatsoever, including indirect or consequential loss and loss of profit.

5.4 The Seller may deliver against an order an excess or deficiency up to 10% of the quantity ordered. The quantity actually delivered will be stated on the invoice.

5.5 The Seller shall be entitled to deliver the goods by instalments and to invoice the Buyer for each instalment. Each instalment will be considered a separate transaction and the failure of any one delivery shall not affect the due performance of the contract as a whole.

6. FORCE MAJEURE

6.1 This contract is subject to cancellation by the Seller or to such variations as may be reasonably necessary by reason of inability to secure labour, material, transport or supplies or by reason of strike, lock-out, trade dispute, weather conditions, hostilities, legislation, Act of God or any cause whatsoever beyond the control of the Seller.

7. WARRANTY AND LIABILITY

7.1 The Seller warrants that the Goods are manufactured with all reasonable care and skill and where applicable comply with the standard specifications set out in the Seller's published literature in relation to the Goods current at the date hereof and made available to the Buyer and that the Goods are of satisfactory quality. Subject to the provision of sub-paragraphs 7.2 to 7.3 and to the extent permitted by law, all other conditions, warranties or obligations whether express or implied by statute, common law or otherwise and relating to the Goods are excluded, and the remaining provisions of this condition shall apply on lieu thereof. The seller shall not be liable for any indirect or consequential loss or loss of profit whatever and however arising.

7.2 If any of the Goods shall be found to be defective and such defects are reported by the Buyer in writing to the Seller in the case of apparent defects within 14 days of delivery. The Seller may, at its opinion, either rectify or replace the defective part of the Goods at the place of delivery and in the condition originally specified or credit the Buyer with a corresponding proportion of the original invoice

price but shall not be under any other liability in respect of either the original or any replacement Goods.

7.3 The Seller shall be under no liability in respect of alleged defective Goods unless:

7.3.1 the Buyer gives to the Seller written notice and details of the defect within the periods mentioned in sub-paragraph 7.2:

7.3.2 the Buyer gives the Seller's representative adequate opportunity to inspect the Goods and remove samples for analysis:

7.3.3 the Buyer has used, kept, maintained or dealt with the Goods properly and carried out no modifications.

7.4 All descriptions and other particulars supplied by the Seller in catalogues, price lists or other documents issued by the Seller or statements made orally are given for general information purposes only and the Buyer acknowledges that it is not entering into the contract in reliance thereupon.

7.5 For non-propriety items where no specifications are set out in the Sellers published literature, the Supplier accepts no responsibility and gives no warranty of Fitness for Purpose of any goods supplied as a result of the Supplier following any drawing, design, sample or Specification supplied by the Buyer; Care and skill will be used by the Supplier to determine the dimensions and material specifications of any samples supplied by the Buyer but no warranty is given regarding the results obtained or the suitability of the product for its application.

7.6 The Buyer shall have sole responsibility for ensuring that the goods are suitable for its particular purpose and the Seller shall have no responsibility whatsoever to the Buyer for any damage liability cost claims or expenses suffered by the Buyer or any third party through following such recommendations .

7.7 The Seller reserves the right to alter the specifications of any goods without prior reference to the Buyer provided that such alteration does not reduce the standard of the previous specification or conflict with the special requirements in the Buyers order .

8. CONSUMER PROTECTION ACT

8.1 All warnings, data sheets, diagrams and other information as to the use, storage, or disposal of the Goods which are made available to the Buyer before, at the time of or after the time of supply of the Goods to the Buyer ("the data") shall be complied with by the Buyer or, as the case may be, supplied by the Buyer to any person to whom the Buyer supplies the Goods or any product in which the Goods are incorporated, and the Buyer shall impose a similar requirement on such person. The buyer shall indemnify the Seller in full against all liabilities, costs, claims, demands and expenses resulting from any failure by any person other than the Seller to comply with the data or to make the data available to any other person.

8.2 Where an indication as to time limit for the use of the Goods has been supplied to the Buyer, the Buyer shall procure that all persons into whose hands the Goods may come are aware of such time limits and shall not supply the Goods after such time limits have been exceeded.

8.3 The Buyer will notify the seller of any intended application of the Goods other than that contemplated in the data referred to in sub-paragraph 8.1 above so as to enable the Seller to verify that the Goods will be safe for use in such application.

8.4 The Seller shall not be liable to the Buyer in respect of

any defect in the goods (under the provisions of the Consumer Protection Act 1987 or otherwise) where such defect is attributable to any act or default of a person other than the Seller.

9. PASSING OF PROPERTY AND RISK

9.1 The property in any Goods delivered by the Seller to the Buyer shall remain in the Seller until such time as the Buyer has paid in full in cleared funds for those Goods and for any other Goods delivered by the Seller to the Buyer.

9.2 Notwithstanding this reservation of ownership, and subject to sub-paragraph 9.3 the Buyer has the Seller's consent to re-sell any Goods which remain the property of the seller in which event the Buyer shall remit the proceeds of such sale to the Seller up to the amount of any sums then owing under sub-paragraph 9.1 and until so doing shall hold such proceeds of sale on behalf of the Seller in such a way that they are kept separate and are readily identifiable.

9.3 If the Buyer:

9.3.1 has any distress or execution levied against the Goods or any of the Buyer's assets: or

9.3.2 has a bankruptcy order made against the Buyer; or

9.3.3 goes into liquidation whether voluntary or compulsory (except solely for the purposes of a reorganisation); or

9.3.4 makes an arrangement with the Buyers creditors; or

9.3.5 has an administrator or administrative receiver appointed over any of the Buyer's assets; or

9.3.6 receives a written demand from the Seller to pay overdue sums owed to the Seller.

The Buyer's consent from the Seller to do the acts referred to in sub-paragraph 9.2 shall determine and the buyer shall forthwith cease to have the right to deal with the goods and the Buyer shall not thereafter sell or use the goods belonging to the Seller, save with the consent in writing of the Seller, until the Seller has been paid in full in accordance with sub-paragraph 9.1.

9.4 The Seller shall be entitled at anytime to revoke the Buyers power to deal with the Goods.

9.5 Upon determination of the Buyers power to deal with the goods under condition 9.3 or 9.4, the Buyer shall place the goods at the disposal of the Seller and the Seller and its servants and agents are hereby irrevocably authorised without the need for consent of any third party using only such force as may be necessary, to enter upon any premises of the Buyer for the purpose of removing the goods.

9.6 Until such time as property in the title to the Goods passes to the Buyer, the Buyer shall hold the Goods on trust for the Seller as bailee for the letter. The Buyer agrees to store or move all Goods that are the property of the Seller in such a way that they are readily identifiable as such, to insure the same for their full value and to make a note in its accounting records that the Goods are the property of the seller.

9.7 Notwithstanding the provisions in sub-paragraph 9.1 the Goods shall be at the risk of the Buyer from the time when they are delivered in accordance with clause 5.

9.8 Where the property in the Goods has not been passed the Seller may nevertheless maintain an action against the Buyer for the purchase price and all other monies owing to the Seller in relation to the Goods notwithstanding Section 49 of the Sale of Goods Act 1979.

10. DEFAULT

10.1 If the Buyer commits any breach of these conditions or if, in the opinion of the Seller, the financial standing of the Buyer becomes unsatisfactory the Seller may, without

prejudice to his other rights and remedies, terminate this contract and any other contract between the Buyer and the Seller by notice in writing to the Buyer. The seller shall also be entitled to require immediate payment for all Good delivered under this and any other contracts subsisting between the parties or (at the Seller's option) security for payment satisfactory to the seller. In the event of termination under the provisions of this clause the Seller shall be relieved of all liability under this contract and any other contract so terminated but such termination shall be without prejudice to any claim or right the Seller might otherwise have against the Buyer.

11. PATENTS AND TRADEMARKS

11.1 No warranty or representation is given by the Seller that the Goods do not infringe any letters patent, trademarks, registered designs or other industrial rights.

11.2 The Buyer indemnify's the Seller for any infringements of any letters patents, trademarks, registered designs or other industrial rights for goods manufactured by the Seller to the Buyer's specifications.

12. GENERAL

12.1 Any notice required to be given in writing under the contract shall be given, where possible, by facsimile transmission and otherwise by first class post, addressed to the registered office of the party for which it is intended, or to such other address as may be notified in writing in accordance herewith for the purpose, and shall be deemed to have been received, in the case of a facsimile transmission, upon transmission and, in the case of a letter 48 hours after posting.

12.2 No failure or delay by the Seller in exercising any of its rights under the contract shall operate as a waiver thereof.

12.3 The Buyer may not assign any of its rights or obligations under the contract.

12.4 In the event that any of these terms and conditions shall become or shall be declared by any court of competent jurisdiction to be invalid or unenforceable in any way, such invalidity or unenforceability shall in no way impair or affect any of the other conditions hereof, all of which shall remain in full force and effect.

12.5 In these conditions "Incoterms" means International rules for interpretation of trade terms of the International Chamber of Commerce as in force at the date when the contract is made, unless the context otherwise requires, any term or expression which is defined in, or given a particular meaning by the provisions of Incoterms shall have the same meaning in these conditions, but if there is any conflict between the provisions of Incoterms and these conditions, the latter shall prevail.

12.6 It shall be the responsibility of the Buyer to ensure that all requirements applicable to the contract, whether statutory, regulatory, municipal and/or otherwise howsoever, (including without limitation any relating to the importation or use of the Goods in the country of destination and for the payment of duties thereon) are duly complied with. It shall be a condition precedent to the performance by the Seller of its obligations under the contract that all necessary licenses, permits and consents shall have been obtained by the Buyer.

12.7 Without prejudice to the generality of condition 12.6 the obtaining of any relevant exchange control consents shall be a condition precedent to the performance by the Seller of any of

its obligations under the contract.

12.8 The conditions and contract shall not create or evidence, any agency or partnership between the Seller on the one hand and the Buyer or any third party on the other.

12.9 Any liability of the Seller under the contract shall be subject to and conditional upon the due performance and observance by the Buyer of all its obligations under these conditions, and subject to these conditions, the Buyer shall not be entitled to withhold or delay payment or, exercise any rights of set off whatsoever and howsoever arising or arisen which might otherwise be available to it.

13. PROPER LAW

13.1 The contract shall be deemed to have been made in England and shall be governed by the construed in accordance with English Law and both parties shall submit to the jurisdiction of the English Courts.

APRIL 1995.

Health & Safety at work act 1974

The act states that it is the duty of the manufacturers and suppliers to ensure so far as is reasonably practicable, any product supplied for use at a place of work is safe and without risk to health when properly used. The act also requires that adequate information be readily available to the user regarding the function for which the product is designed.

The information contained within this brochure ensures that, when correctly installed, the products will operate safely under normal conditions.

If in doubt with regard to a particular application and/or working conditions please consult our technical department.